


FineLine System
TubeLED Mini



60mm (2.36”) overall diameter. Miniature low voltage LED tubular spotlight. TubeLED Spotlight for use in FineLine Profile system. Family of matching products also available.

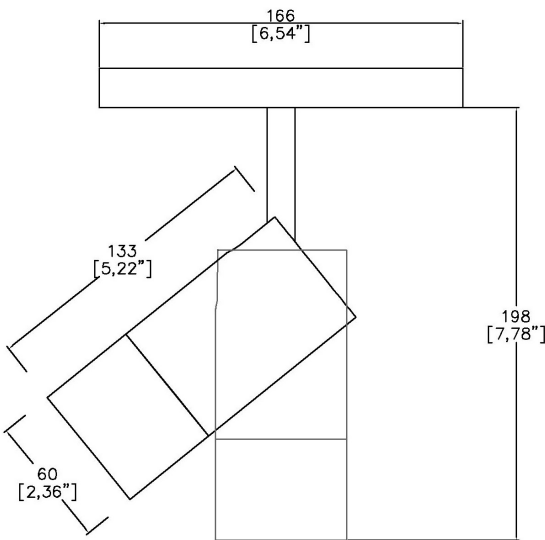

7100/2-LED-FLS

LED Source	LED	LED	LED
CCT	3000K	3000K	3000K
Drive Current	380mA	380mA	380mA
Supply Voltage	48v	48v	48v
Power inc Driver	14.8W	14.8W	14.8W
Beam Angle	12°	24°	38°
Delivered Lumens	975	936	1049
Delivered Intensisty cd	13942	4668	2911
Efficacy lm/w	66	63	71
Forward Volt	33V	33V	33V
CRI	≥90 CRI	≥90 CRI	≥90 CRI

Project Ref: _____ Location Ref: _____

Fixture Order Code:

7100/2-LED

 - - - - - -

FLS

Fixture

7100/2-LED

TubeLED Mini GEN2

CCT

927

930

940

90 CRI 2700K

90 CRI 3000K

90 CRI 4000K

Beam

12

24

38

12°

24°

38°

Protocol

S

A

D

B

Non-Dim

Analogue (0-10v)

DALI

Bluetooth**

Colour Insert

SN

SG

CP

BZ

(Blank)

Satin Nickel

Satin Gold

Copper

Bronze

Not required standard black to be supplied

Finish

WH

BK

RAL

White

Black

Custom RAL Finish

Fixing

FLS

FineLine System

Please refer to installation instruction for wiring diagram

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

Light efficiency:


66 Lumen/Watt

Light quality:

CRI: 92.3

Color temperature:

3000 K

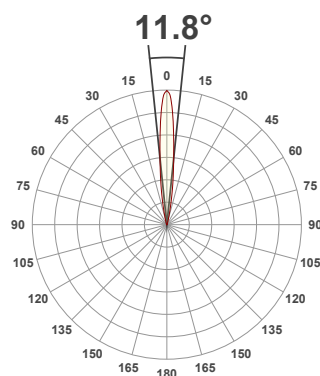

Product name:

TubeLED Mini GEN2, 3000K, 12°


Item number:

7100/2-LED-930-12


**Delivered information for
above fixture and LED
combination.**

Output: 975 Lumen Peak intensity: 13942 cd Power consumption: 14.8


CRI R values

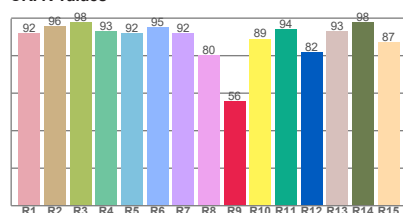

TM30 C Values

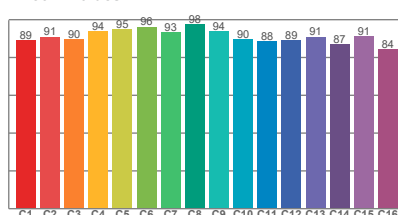


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	92.3	56.0	91.1	98.4	90.7	0.437	0.404	0.260	0.352	0.0013

Beam details

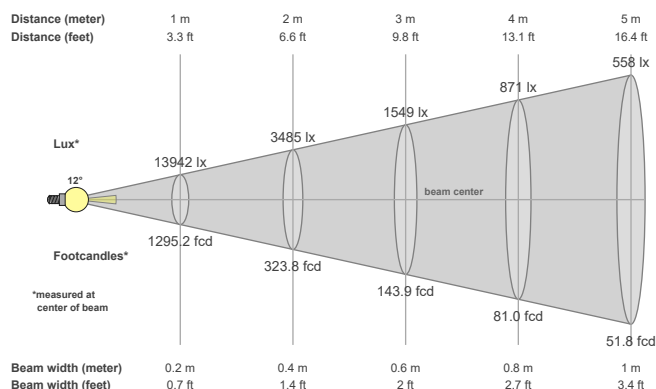

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
11.8°	25°	35.5°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
13942 cd	99.2%	98.4%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
13942lx	3485lx	1549lx	871lx	558lx	387lx	285lx	218lx	172lx	139lx	115lx	97lx	82lx	71lx	62lx	54lx	48lx	43lx	39lx	35lx
1295.2fcd	323.8fcd	143.9fcd	81fcd	51.8fcd	36fcd	26.4fcd	20.2fcd	16fcd	13fcd	10.7fcd	9fcd	7.7fcd	6.6fcd	5.8fcd	5.1fcd	4.5fcd	4fcd	3.6fcd	3.2fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1
4000K = 1.084

Light efficiency:


63 Lumen/Watt

Light quality:

CRI: 92.3

Color temperature:

3000 K

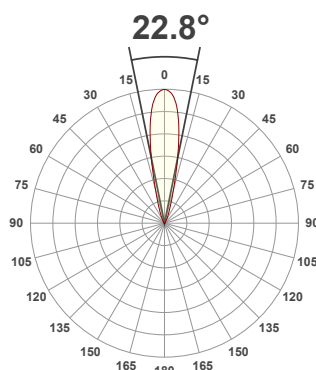

Product name:

TubeLED Mini GEN2, 3000K, 24°


Item number:

7100/2-LED-930-24


**Delivered information for
above fixture and LED
combination.**

Output: 936 Lumen Peak intensity: 4668 cd Power consumption: 14.8


CRI R values

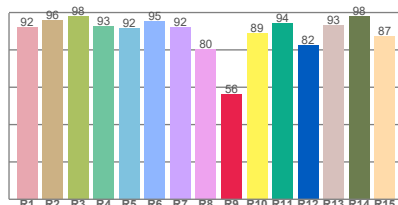

TM30 C Values

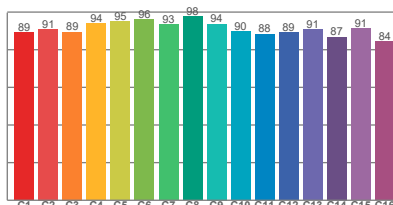


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	92.3	56.1	91.1	98.4	90.7	0.437	0.404	0.260	0.352	0.0011

Beam details

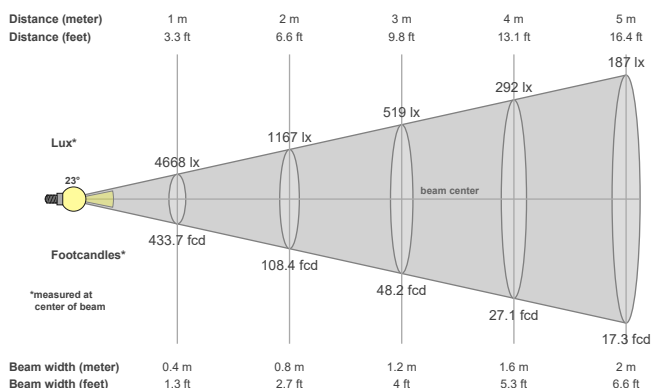

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
22.8°	42.1°	63.8°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
4668 cd	99.5%	98.3%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
4668lx	1167lx	519lx	292lx	187lx	130lx	95lx	73lx	58lx	47lx	39lx	32lx	28lx	24lx	21lx	18lx	16lx	14lx	13lx	12lx
433.7fcd	108.4fcd	48.2fcd	27.1fcd	17.3fcd	12fcd	8.9fcd	6.8fcd	5.4fcd	4.3fcd	3.6fcd	3fcd	2.6fcd	2.2fcd	1.9fcd	1.7fcd	1.5fcd	1.3fcd	1.2fcd	1.1fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1
4000K = 1.084

Light efficiency:


71 Lumen/Watt

Light quality:

CRI: 92.4

Color temperature:

3000 K

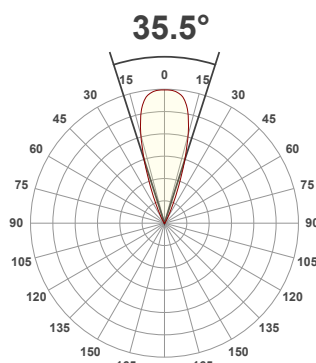

Product name:

TubeLED Mini GEN2, 3000K, 38°


Item number:

7100/2-LED-930-38


Delivered information for above fixture and LED combination.

Output: 1049 Lumen Peak intensity: 2911 cd Power consumption: 14.8


CRI R values

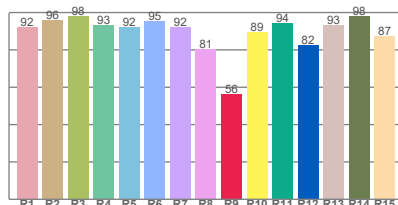

TM30 C Values

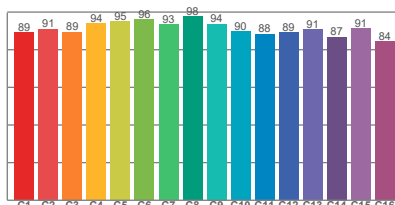


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	92.4	56.3	91.1	98.4	90.7	0.437	0.404	0.260	0.352	0.0011

Beam details

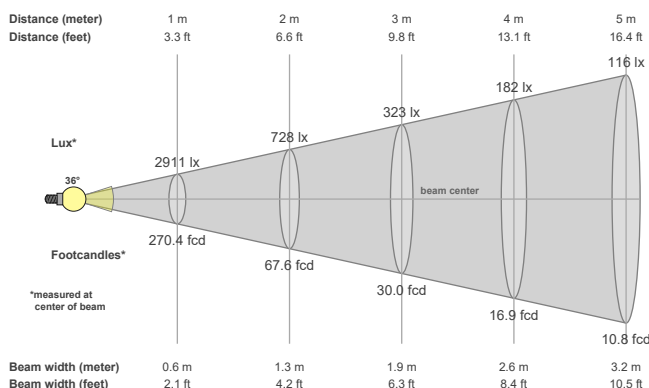

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
35.5°	52.5°	67.7°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
2911 cd	99.3%	98.5%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2911lx	728lx	323lx	182lx	116lx	81lx	59lx	45lx	36lx	29lx	24lx	20lx	17lx	15lx	13lx	11lx	10lx	9lx	8lx	7lx
270.4fcd	67.6fcd	30fcd	16.9fcd	10.8fcd	7.5fcd	5.5fcd	4.2fcd	3.3fcd	2.7fcd	2.2fcd	1.9fcd	1.6fcd	1.4fcd	1.2fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.7fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1
4000K = 1.084