lucent




ProSpex Flare90 Part L Compliant Fixed Downlight


TM65.2	11kgCO2e
TM66	2.3 CEAM



92mm (3.62") overall diameter. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available. Required depth height + 25mm^



930-FL-LED + 9000-PBZ Cut-out 83mm Ø



930-FL-LED + 9000-PCZ Cut-out 83mm Ø

LED Source	LED51/Q-HE	LED51/Q-HE	LED51/Q-HE	LED51/Q-HE	11
CCT	3000K	3000K	3000K	3000K	LL
Drive Current	200mA	200mA	200mA	200mA	≥75 Dwe ll ings Compliant
Power inc Driver	8.0W	8.0W	8.0W	8.0W	
Beam Angle	NF (18°)	MF (25°)	FL(35°)	WFL (55°)	17
Delivered Lumens	1066	1082	1056	1079	≥95 General Compliant
Delivered Intensisty cd	7369	4686	2883	1463	Compliant
Delivered Lumens per circuit watt	133	135	132	135	
Forward Volt	33V	33V	33V	33V	LZ
CRI	≥93 CRI	≥93 CRI	≥93 CRI	≥93 CRI	≥80 Display Compliant

Lumen output for other CCTs use the following multification factors to the 3000K figures above: 2700K x 0.98. 4000K x 1.02


🖏 Int	ernational
-------	------------

lucent_®

Project Ref:			Location Ref:			
Fixture Ord Fixture –		930-FL-LED –				
930-FL-LED	Flare90 Fixed	ed with LED51 High Efficacy				
Finish — WH BK RAL ABR1 ABZ1 PCH1 PNK1 PBR1	White Black Custom RAL F Antique Brass Antique Bronz Polished Chro Polished Nicke Polished Brass	e me el				
IP Rating 44 54	IP44 IP54					
Installation Installation 9000-PBZ 9000-PCZ	 Trim	e:	earance			
Module Orc	ler Code:	LED51/Q-HE –				
LED – LED51/Q-HE	LED50 ONE G	QUANTUM HE				
CCT – 27 30 40	2700K 3000K 4000K***					
Beam – NF MF FL WFL	Narrow Flood Medium Flood Flood Wide Flood					
***contact Luce	nt for availabilit	У				
Driver Optic Protocol — S A P D B	Non-Dim Analogue (0-10 Phase DALI Bluetooth**	v)	Emergency Options: Emergency E Maintained 3hr Emergency ED Maintained 3hr DALI Self Test ES Maintained 3hr Self Test			

lucent

Finish selection

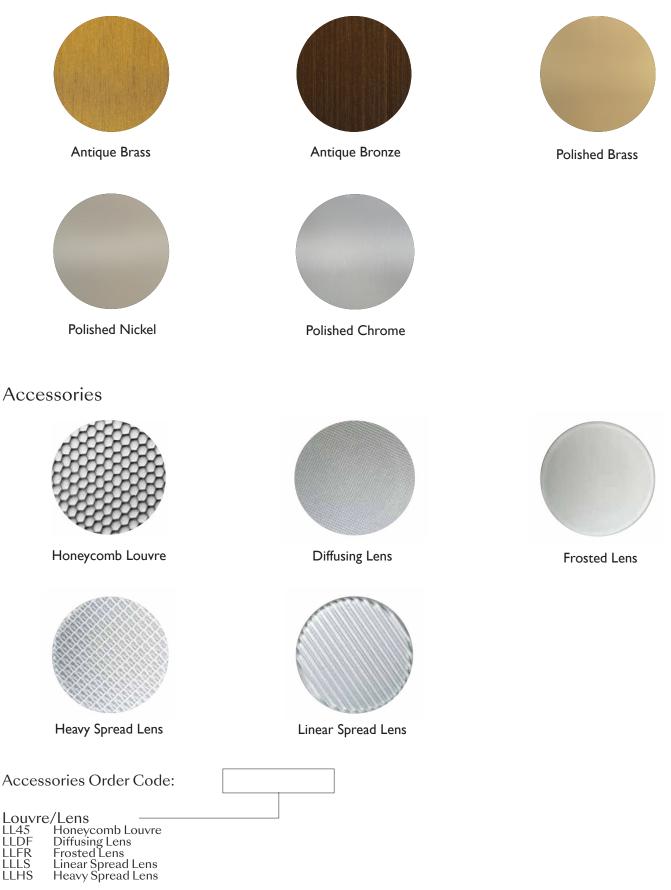

lucent

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.