

## lucent

### Oculus Accent Trim




Ø65mm (2.56") adjustable downlight with eyeball mechanism, offering 30° adjustment in all directions. Available with a standard trim kit or 3 flush trim options, depending on ceiling type and finish.

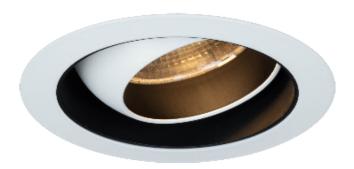








Oculus with Trim Kit TR1 <sup>(1)</sup> Cut-out Ø82mm (Ø3,22"). Required depth height +25mm.

LED Source	LED51/3	LED51/3	LED51/3	LED51/3
CCT	3000K	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA	350mA
Power inc Driver	14.8W	14.8W	14.8W	14.8W
Beam Angle	SP (12°)	MF (19°)	FL(30°)	WFL (56°)
Delivered Lumens	908	976	1095	1134
Delivered Intensisty cd	11569	6764	3934	1502
Delivered Lumens per circuit watt	61	66	74	76
Forward Volt	36V	36V	36V	36V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI

Apply these factors to 3000 K for lumen output of other CCTs:  $2200 \text{K} \times 0.65 / 2400 \text{K} \times 0.69 / 2700 \text{K} \times 0.98 / 4000 \text{K} \times 1.02$ .

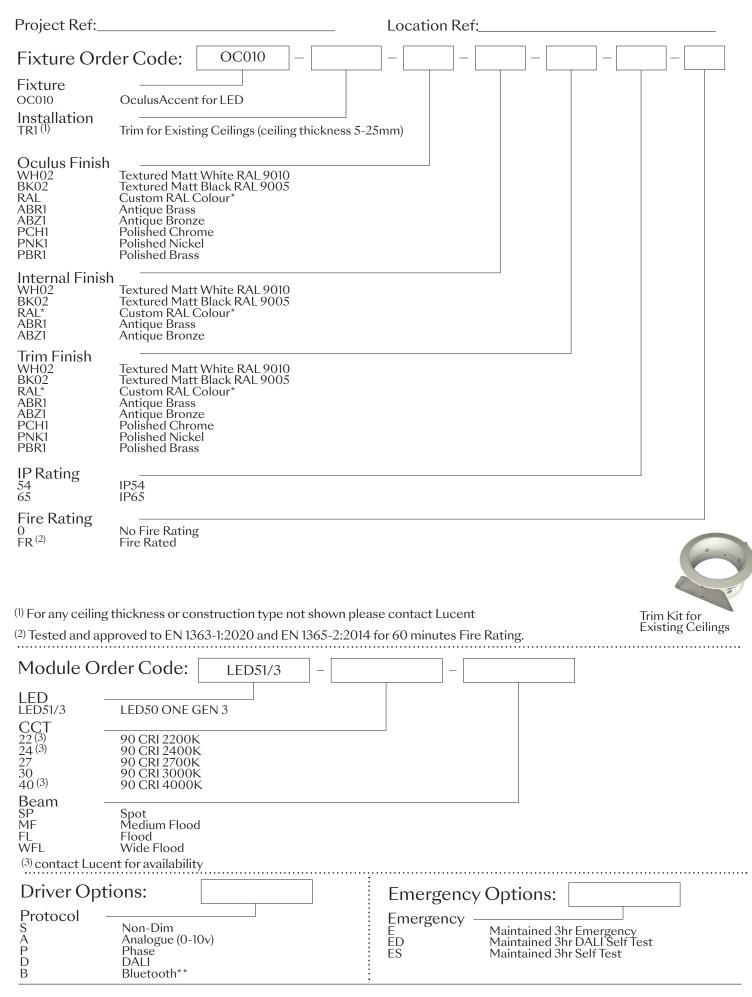

# <u>lucent</u>®

### Finish selection



Antique Brass



Antique Bronze



Polished Brass




Polished Nickel



Polished Chrome

### Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens

Issued: 08/25



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

Louvre/Lens — LL45 Honeycomb Louvre LLDF Diffusing Lens Frosted Lens Linear Spread Lens Heavy Spread Lens



lucent®

#### Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

- \*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.
- ^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Issued: 08/25