lucent


11kgCO2e

2.3 CEAM


TM65.2

TM66


ProSpex Pinhole90 Accent

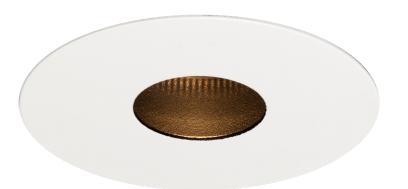

92mm (3.62") overall diameter. 360° Rotation. Up to 30° Tilt. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available. Required depth height + 25mm^



90413-A-LED + 9000-PBZ Cut-out 83mm Ø Trim kit



90413-A-LED + 9000-PCZ Cut-out 83mm Ø Seamless flush appearance

LED Source	LED51/2	LED51/2	LED51/2	LED51/2
CCT	3000K	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA	350mA
Power inc Driver	13.6W	13.6W	13.6W	13.6W
Beam Angle	12°	24°	38°	38°
Delivered Lumens	588	693	821	728
Delivered Intensisty cd	6479	4033	2217	1444
Efficacy Im/w	43	51	60	54
Forward Volt	36V	36V	36V	36V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI


Apply these factors to 3000K for lumen output of other CCTs: $2200K \times 0.65 / 2400K \times 0.69 / 2700K \times 0.98 / 4000K \times 1.02$.

lucent®

Project Ref:				Location Ref:			
Fixture Orc	ler Code:	90413-A-LED] –				
Fixture – 90413-A-LED	Pinhole90 Acc	ent with LED51					
Finish – WH BK RAL* ABR1 ABZ1 PCH1 PNK1 PBR1	White RAL 90 Black RAL 900 Custom RAL 0 Antique Brass Antique Bronz Polished Chro Polished Nicke Polished Brass)5 Colour* me					
IP Rating – (Blank) 54	IP20 IP54						
Installation Installation 9000-PBZ 9000-PCZ	Trim	le: kit for trimmed app er-kit for seamless	earance flush appeara	псе			
LED Order	Code:	LED51/2] – [
LED - LED51/2	LED50 ONE G	GEN2					
CCT - 22*** 24*** 27 30 40***	90 CRI 2200k 90 CRI 2400k 90 CRI 2700k 90 CRI 3000k 90 CRI 3000k 90 CRI 4000k	<*** <					
Beam - 12 24 38 55	12° 24° 38° 55°						
***contact Luce	ent for availabilit	у					
Driver Opti Protocol - A P D B	Non-Dim Analogue (0-10 Phase DALI Bluetooth**])v)		Emergency O Emergency Ma ED Ma ES Ma	ptions: aintained 3hr Emergency aintained 3hr DALI Self Test aintained 3hr Self Test		

lucent

Finish selection

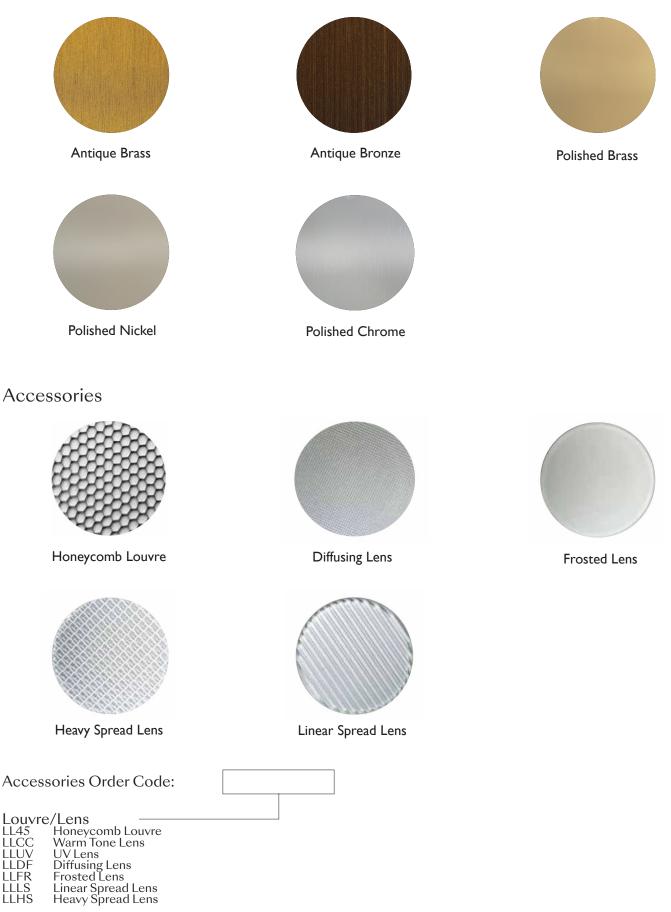

lucent

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE