


# EasyFit Soft70 GEN2 Accent



3.54” (90mm) overall trim diameter. 2.76” (70mm) overall trimless diameter. 30° Tilt in all directions. Available with a seperate installation kit with overlap flange or mud-in kit for seamless flush finish. Fixed version available. Supplied with a remote driver box and a plug and play tethered power supply.

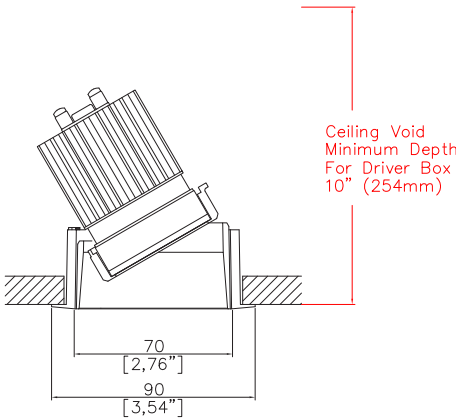

ASF70210-TR1  
Cut-out Ø 3.22” (82mm)

| LED Source                        | ALED51/Q-HE | ALED51/Q-HE | ALED51/Q-HE | ALED51/Q-HE |
|-----------------------------------|-------------|-------------|-------------|-------------|
| CCT                               | 3000K       | 3000K       | 3000K       | 3000K       |
| Drive Current                     | 200mA       | 200mA       | 200mA       | 200mA       |
| Power inc Driver                  | 8.0W        | 8.0W        | 8.0W        | 8.0W        |
| Beam Angle                        | NF (18°)    | MF (25°)    | FL (33°)    | WFL (54°)   |
| Delivered Lumens                  | 1099        | 1161        | 1127        | 1125        |
| Delivered Intensisty cd           | 9147        | 5623        | 3826        | 1739        |
| Delivered Lumens per circuit watt | 137         | 145         | 140         | 140         |
| Forward Volt                      | 33V         | 33V         | 33V         | 33V         |
| CRI                               | ≥90 CRI     | ≥90 CRI     | ≥90 CRI     | ≥90 CRI     |

Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 3500K x 1.01 / 4000K x 1.02.

Ceiling void minimum depth for driver box: 10.00” (254mm)

Project Ref: \_\_\_\_\_ Location Ref: \_\_\_\_\_

Specify fixture part number (All boxes must be filled in to correctly order)

|          |     |  |  |  |   |             |  |  |               |  |  |
|----------|-----|--|--|--|---|-------------|--|--|---------------|--|--|
| ASF70210 | TR1 |  |  |  | 0 | ALED51/Q-HE |  |  | ALEZ1-120-277 |  |  |
|----------|-----|--|--|--|---|-------------|--|--|---------------|--|--|

Installation 

TR1 Installation kit with overlap flange

Body Finish 

WH03 White RAL9016  
BK01 Black RAL9005  
RAL Custom\*  
ABR1 Antique Brass  
ABZ1 Antique Bronze

Trim Finish 

WH03 White RAL9016  
BK01 Black RAL9005  
RAL Custom\*  
ABR1 Antique Brass  
ABZ1 Antique Bronze

Location 

WT Wet  
Supplied for dry location as standard

LED Type 

ALED51/Q-HE LED50 ONE Quantum High Efficiency

CCT 

27 2700K  
30 3000K  
35 3500K (1)  
40 4000K (1)

(1) contact Lucent for availability

Beam Angles 

NF Narrow Flood  
MF Medium Flood  
FL Flood  
WFL Wide Flood

EasyFit 

ALEZ1-120-277 Lucent EasyFit 120-277V


Dimming Protocol 

SLA EldoLED Analog (0-10V) (0.1% Dimming)  
ECA EldoLED Analog (0-10V) (1% Dimming)  
SLD EldoLED DALI (0.1% Dimming)  
ECD EldoLED DALI (1% Dimming)  
PTB15 ERP PTB 0-10V/Phase (1% Dimming) (PHASE ONLY 120V)  
FTX15 Hatch Foundation 0-10V/Phase (1% Dimming)

Contact Lucent factory for Lutron LED Driver options

Louvre/Lens 


XX Not required  
LL45 Honeycomb  
LLDF Solite/Diffusing  
LLFR Frosted Lens  
LLLS Linear Spread  
LLHS Heavy Spread




NIC - No contact with insulation

Ceiling void minimum depth for driver box: 10.00" (254mm)

Fixture and EasyFit driver box

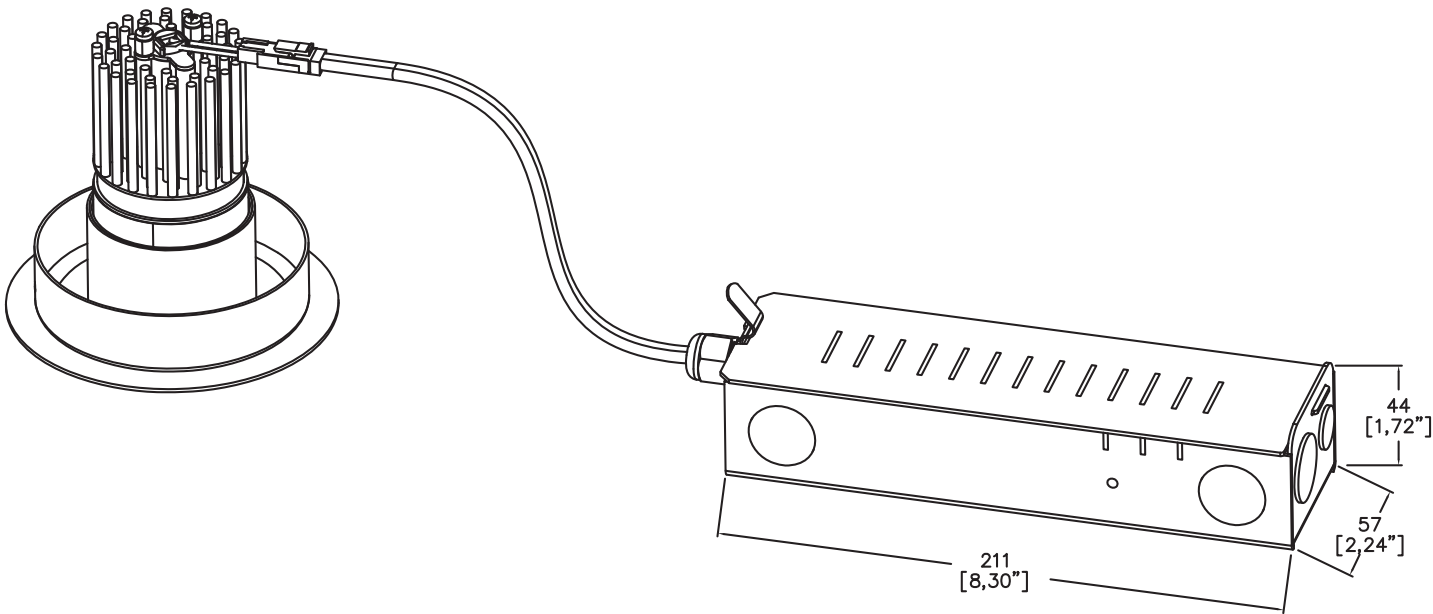

Installation Kits



Installation kit with overlap flange

Damp/wet rated fixture



When supplied as wet rated an additional ring is installed at the aperture with a clear glass

Ceiling void minimum depth for driver box: 10.00" (254mm)

Finish selection




Antique Brass



Antique Bronze

Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

^ Depth indicated is the minimum recess depth for the driver to be installed through the luminaire cut out.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

Location. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

