


EasyFit Soft70 GEN2 Deep Fixed



3.54” (90mm) overall trim diameter. 2.76” (70mm) overall trimless diameter. Available with a seperate installation kit with overlap flange or mud-in kit for seamless flush finish. Adjustable version available. Supplied with a remote driver box and a plug and play tethered power supply.

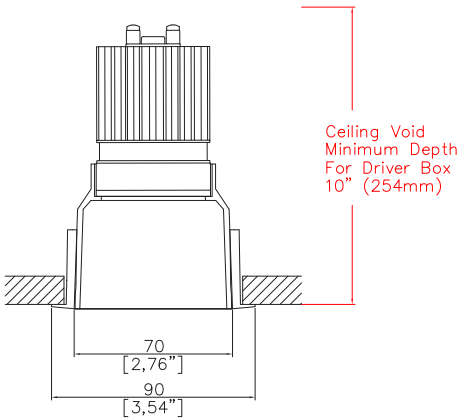

ASF70100-TR1
Cut-out Ø 3.22” (82mm)

LED Source	ALED51/Q-HO	ALED51/Q-HO	ALED51/Q-HO	ALED51/Q-HO
CCT	3000K	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA	350mA
Power inc Driver	14W	14W	14W	14W
Beam Angle	NF (18°)	MF (25°)	FL (33°)	WFL (54°)
Delivered Lumens	1790	1857	1822	1765
Delivered Intensisty cd	13939	10439	5094	2353
Delivered Lumens per circuit watt	128	132	130	126
Forward Volt	34V	34V	34V	34V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI

Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 3500K x 1.01 / 4000K x 1.02.

Ceiling void minimum depth for driver box: 10.00” (254mm)

Project Ref: _____ Location Ref: _____

Specify fixture part number (All boxes must be filled in to correctly order)

ASF70100	TR1				0	ALED51/Q-HO			ALEZ1-120-277		
----------	-----	--	--	--	---	-------------	--	--	---------------	--	--

Installation _____
TR1 Installation kit with overlap flange

Body Finish _____
WH03 White RAL9016
BK01 Black RAL9005
RAL Custom*
ABR1 Antique Brass
ABZ1 Antique Bronze

Trim Finish _____
WH03 White RAL9016
BK01 Black RAL9005
RAL Custom*
ABR1 Antique Brass
ABZ1 Antique Bronze

Location _____
DP Damp
WT Wet
Supplied for dry location as standard

LED Type _____
ALED51/Q-HO LED50 ONE Quantum High Output

CCT _____
27 2700K
30 3000K
35 3500K (1)
40 4000K (1)

(1) contact Lucent for availability


Beam Angles _____
NF Narrow Flood
MF Medium Flood
FL Flood
WFL Wide Flood

EasyFit _____
ALEZ1-120-277 Lucent EasyFit 120-277V

Dimming Protocol _____
SLA EldoLED Analog (0-10V) (0.1% Dimming)
ECA EldoLED Analog (0-10V) (1% Dimming)
SLD EldoLED DALI (0.1% Dimming)
ECD EldoLED DALI (1% Dimming)
PTB15 ERP PTB 0-10V/Phase (1% Dimming) (PHASE ONLY 120V)
FTX15 Hatch Foundation 0-10V/Phase (1% Dimming)

Contact Lucent factory for Lutron LED Driver options


- Louvre/Lens _____
- XX** Not required
 - LL45** Honeycomb
 - LLDF** Solite/Diffusing
 - LLFR** Frosted Lens
 - LLLS** Linear Spread
 - LLHS** Heavy Spread




NIC - No contact with insulation

Ceiling void minimum depth for driver box: 10.00" (254mm)

Fixture and EasyFit driver box

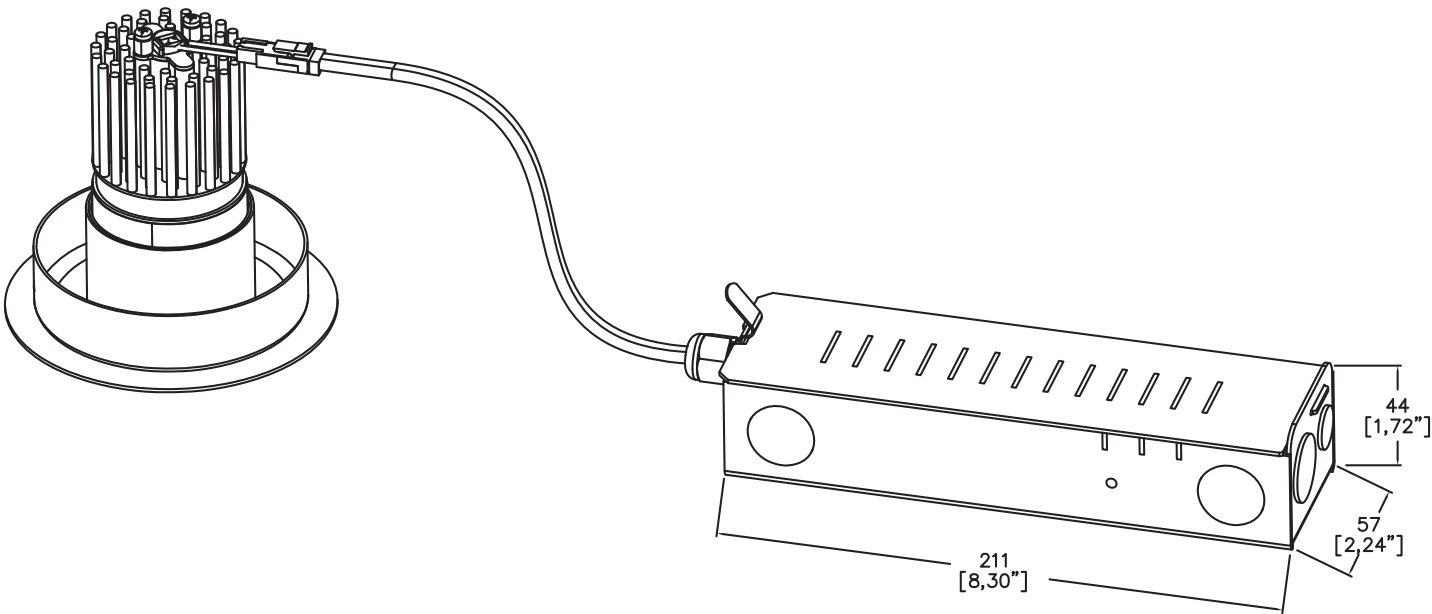

Installation Kits



Installation kit with overlap flange

Ceiling void minimum depth for driver box: 10.00" (254mm)

Finish selection




Antique Brass




Antique Bronze

Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

^ Depth indicated is the minimum recess depth for the driver to be installed through the luminaire cut out.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

Location. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

