
#### lucent

#### ProSpex Duo Accent


ТМ65.2	11kgCO2e
TM66	2.3 CEAM



108mm (4.25") overall diameter. 360° rotation. Up to 35° tilt. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available. Required depth height + 25mm^



31603-LED + 3000-PBZ Cut-out 101mm (3.97") Ø
Trim kit



31603-LED + 3000-PCZ Cut-out 96mm (3.78") Ø Seamless flush appearance

LED Source	LED51/2	LED51/2	LED51/2	LED51/2
CCT	3000K	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA	350mA
Power inc Driver	13.8W	13.8W	13.8W	13.8W
Beam Angle	12°	24°	38°	55°
Delivered Lumens	832	895	1025	1073
Delivered Intensisty cd	10738	4392	2961	1243
Efficacy Im/w	60	65	74	79
Forward Volt	36V	36V	36V	36V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI


Apply these factors to 3000K for lumen output of other CCTs:  $2200K \times 0.65 / 2400K \times 0.69 / 2700K \times 0.98 / 4000K \times 1.02$ .

# lucent®

Project Ref:			Location Ref:			
Fixture Ord	ler Code:	31603-LED –				
Fixture – 31603-LED	Duo Accent w	ith LED51				
Finish – WH BK RAL* ABR1 ABZ1 PCH1 PNK1 PBR1	White RAL 90 Black RAL 900 Custom RAL 0 Antique Brass Antique Bronz Polished Chro Polished Nicke Polished Brass	AL 9005 RAL Colour* Brass Bronze I Chrome				
IP Rating – 54	 IP54					
Installation	Order Coc	le:				
Installation 3000-PBZ 3000-PCZ	Trim Plast	kit for trimmed appearance ter-kit for seamless flush ap	pearance			
•••••		·····				
LED Order	Code:	LED51/2 –				
LED – LED51/2	LED50 ONE G	GEN2				
CCT – 22*** 24*** 27 30 40***	90 CRI 2200k 90 CRI 2400k 90 CRI 2700k 90 CRI 2700k 90 CRI 3000k 90 CRI 4000k	< <				
Beam - 12 24 38 55	12° 24° 38° 55°					
***contact Luce	ent for availabilit	-у				
Driver Opti Protocol - A P D B	Non-Dim Analogue (0-10 Phase DALI Bluetooth**	0v)	Emergency Options: Emergency E Maintained 3hr Emergency ED Maintained 3hr DALl Self Test ES Maintained 3hr Self Test			

### lucent

#### **Finish selection**

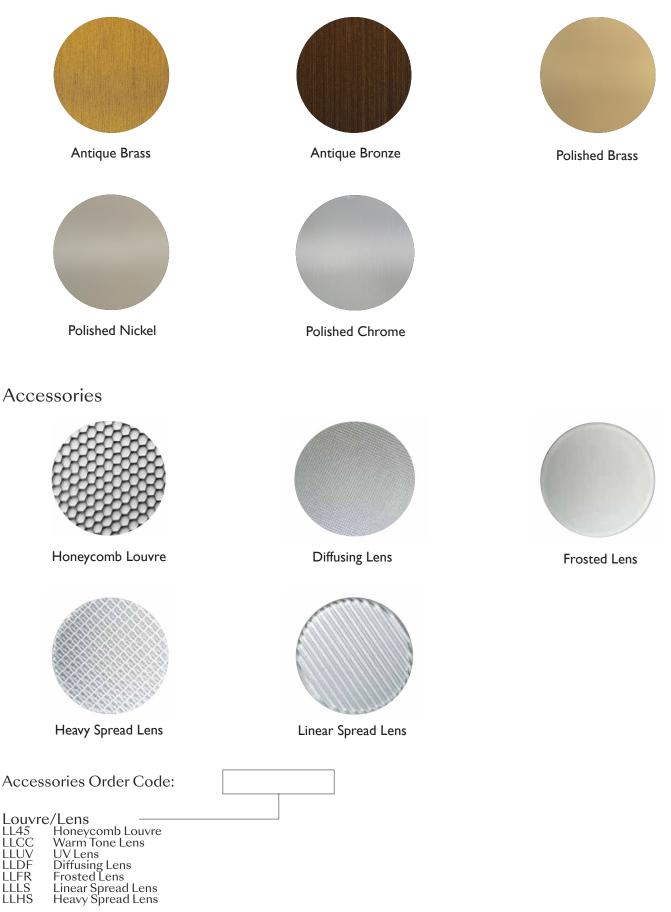

## lucent

#### **Technical Details**

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE