


Installation Instructions


For InWall IW40, IW40-SQ and IW40-90

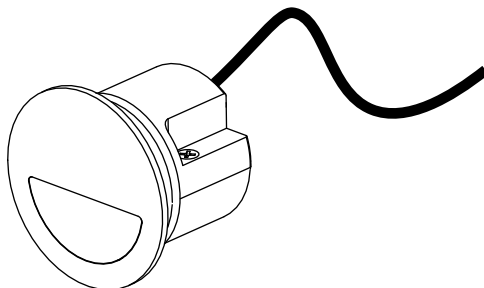


IW40-XX-XXX-XX

IW40-SQ-XX-XXX-XX


IW40-90-XX-XXX-XX




Switch off mains power before installation.



Products must be series wired. See page 5 for instructions.



Max ambient temperature 50°C,
Min ambient temperature -25°C.




Do not cover luminaire with insulation material.

- Please read the following instructions carefully.
- Follow all national and local wiring and safety regulations.
- These products should only be installed by a qualified electrician.
- The light source contained in these luminaires shall only be replaced by the manufacturer, their service agent or a similarly qualified person.



- These products require an LED driver - **DO NOT CONNECT DIRECTLY TO MAINS POWER!**
- Connecting or disconnecting these luminaires while powered will damage the LED.
- Retain these instructions for future reference.

Installation Instructions- Solid Wall Tube


For InWall IW40, IW40-SQ and IW40-90

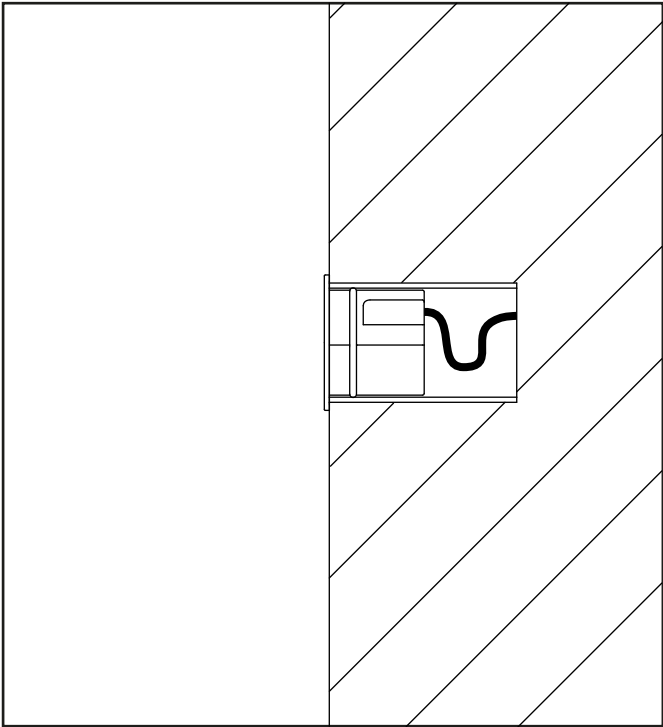


Mounting tube for solid wall.

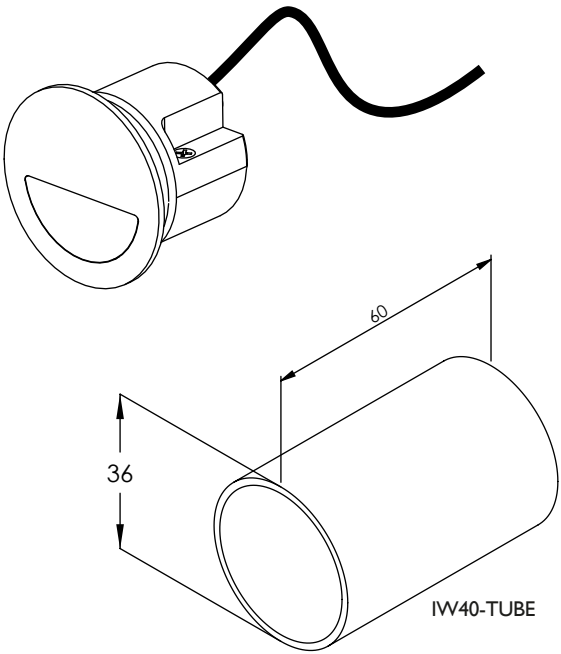


1. Prepare cut-out for mounting tube and cable access. See above for actual tube dimensions.




2. Bond mounting tube into cut-out.




3. Fill in any gaps around mounting tube.




4. Front of the mounting tube must be level with wall.




5. Tube can be carefully cut to length if required.



6. Run cable through mounting tube




7. Insert fitting into the mounting tube using a pushing and twisting motion to ensure it sits flat against mounting surface.




8. Remove protective film before use.

Installation Instructions- Single Wiring


For InWall IW40, IW40-SQ and IW40-90




First plan the layout, including where drivers and connectors will be located.





Be careful not to damage outer sheath of cable when making connections.




All outdoor wiring connections must be made with waterproof connectors and located inside enclosures for added protection




Cable conductor max size 2 x 1.5mm.

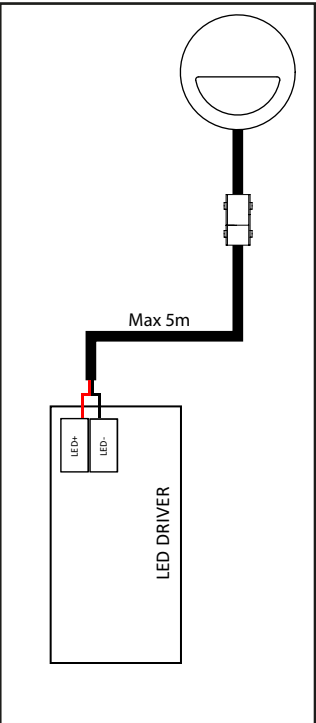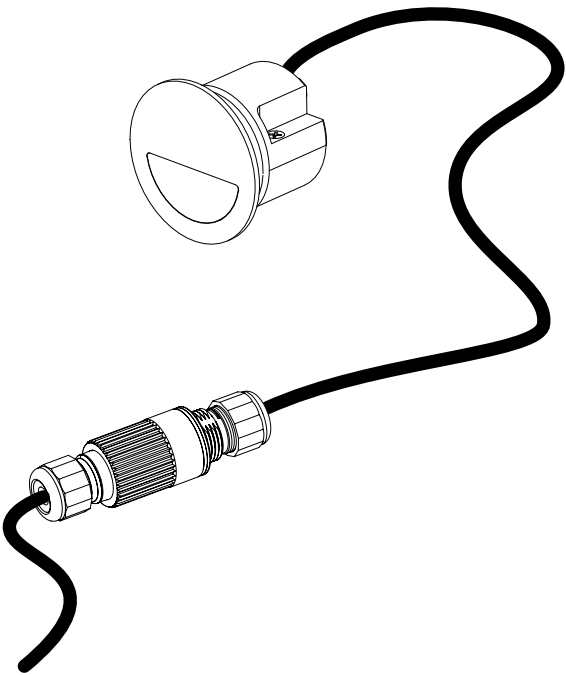

Indoor applications

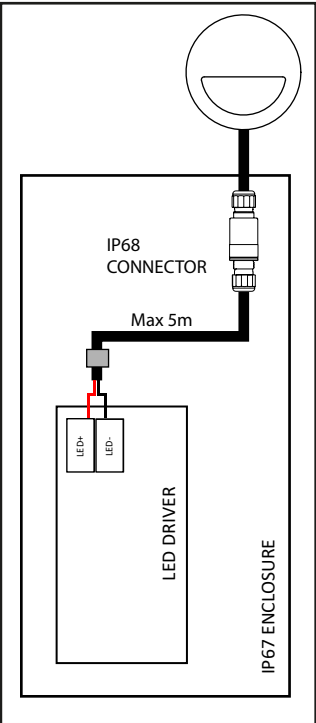


Outdoor applications

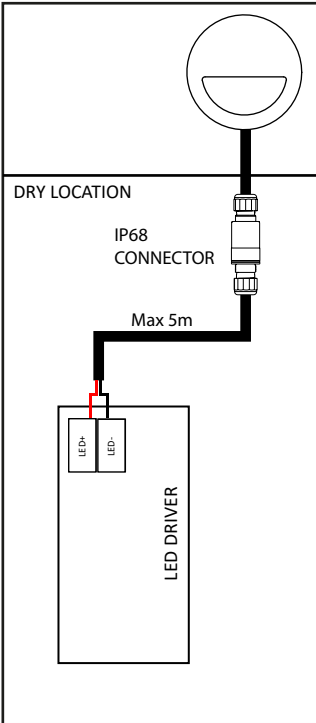


Outdoor remote driver

Installation Instructions- Series Wiring


For InWall IW40, IW40-SQ and IW40-90

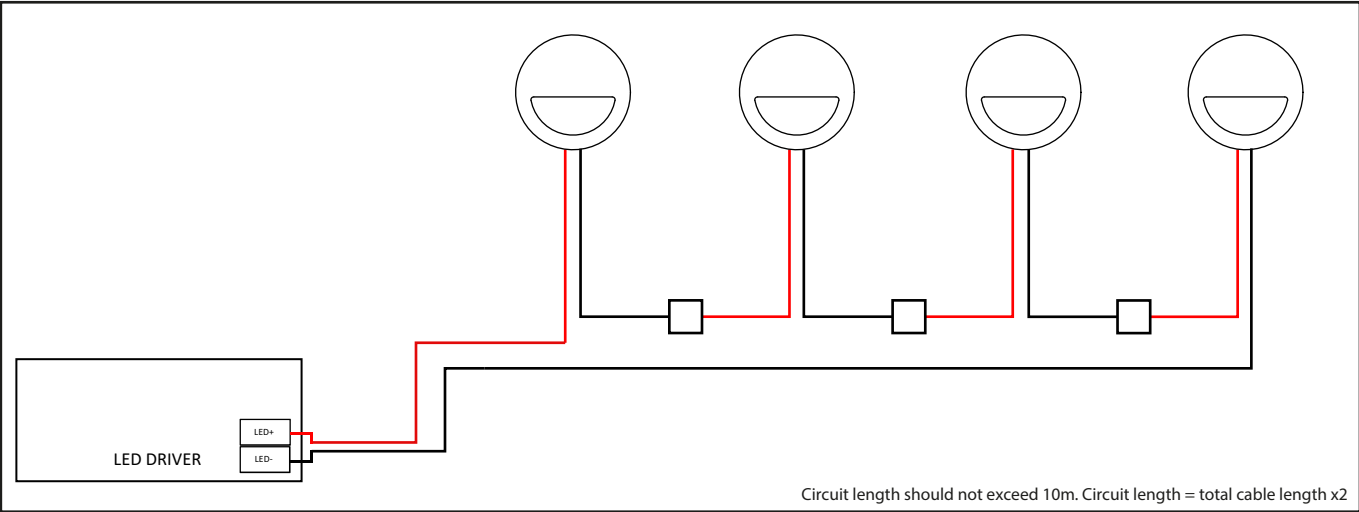

Series wiring InGround products.

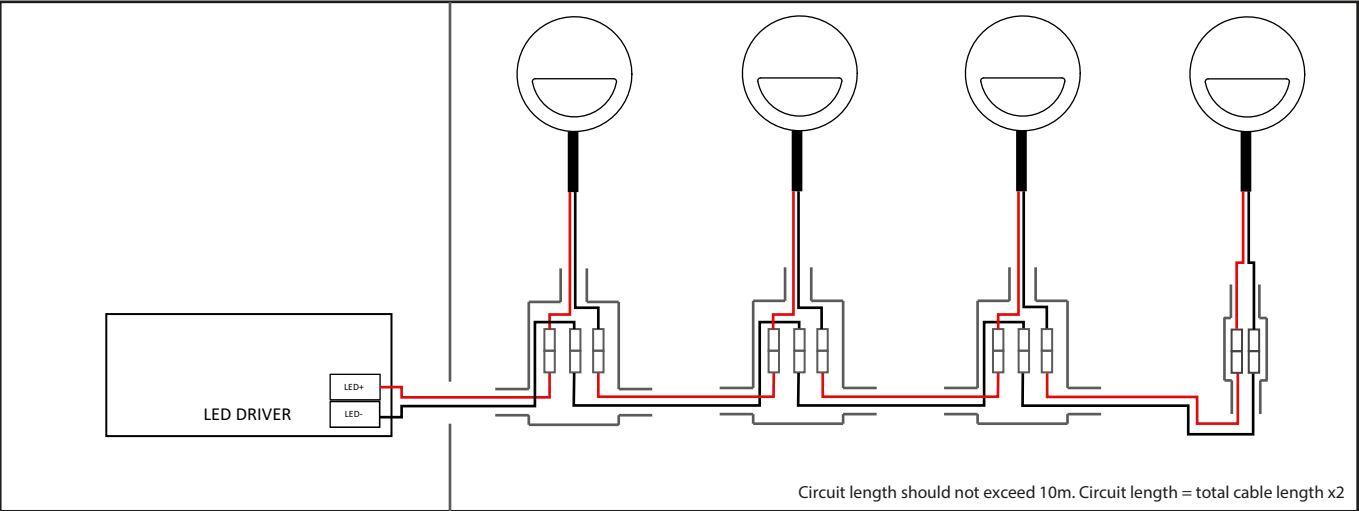

Series wiring InGround products using wiring boxes.

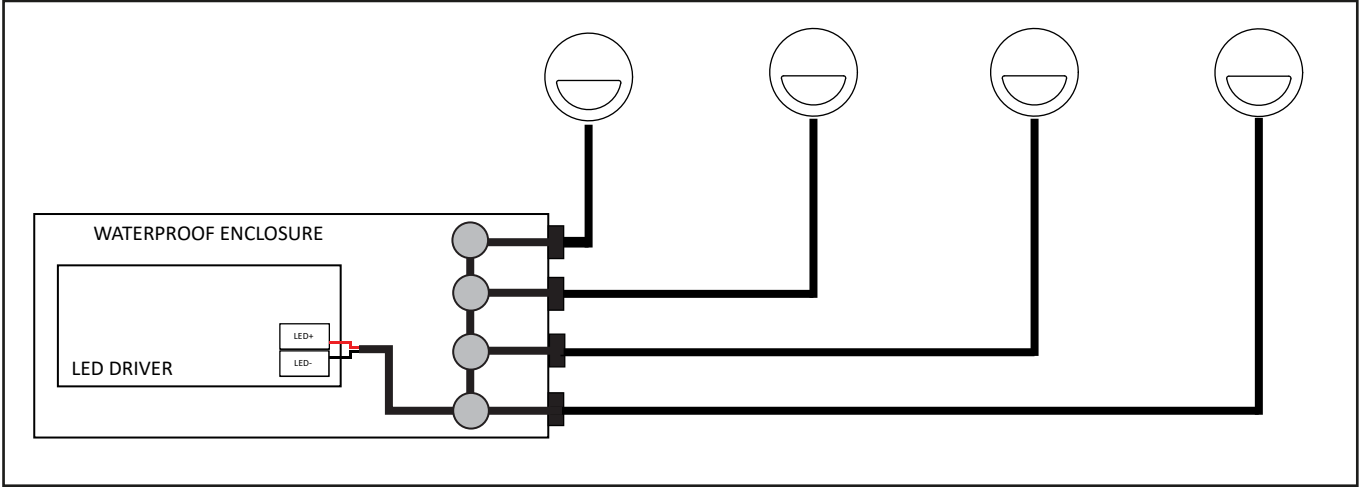

To provide maximum level of protection to circuit run all cables to a single enclosure and make connections within using IP rated connectors.