


Surface Midi Shallow Height



75mm (2.95”) overall diameter. Miniature surface mounted tubular downlight. Remote installation driver. Family of matching products also available.

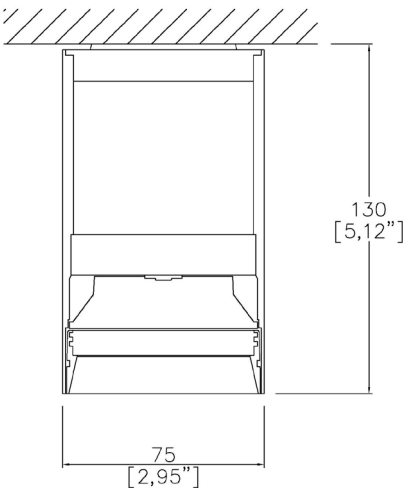

075-SM-SH

LED Source	LED	LED	LED
CCT	3000K	3000K	3000K
Drive Current	500mA	500mA	500mA
Power inc Driver	22W	22W	22W
Beam Angle	12°	19°	34°
Delivered Lumens	1340	1185	1226
Delivered Intensisty cd	20036	9215	3923
Efficacy lm/w	61	54	56
Forward Volt	33V	33V	33V
CRI	≥90 CRI	≥90 CRI	≥90 CRI

Project Ref: _____

Location Ref: _____

Fixture Order Code:

075-SM-SH

 - - - - -

Fixture

075-SM-SH

Surface Midi Shallow Height

Finish

WH

BK

RAL

White

Black

Custom RAL Colour*

CCT

27

30

40

2700K

3000K

4000K

Beam

12

19

34

12°

19°

34°

Protocol

S

A

P

D

B

Non-Dim

Analogue (0-10v)

Phase

DALI

Bluetooth**

Emergency

E

ED

ES

Maintained 3hr Emergency

Maintained 3hr DALI Self Test

Maintained 3hr Self Test



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens



Warm Tone

Accessories Order Code:

- Louvre/Lens
- MD45 Honeycomb Louvre
 - MDCC Warm Tone Lens
 - MDEV UV Lens
 - MDDF Diffusing Lens
 - MDFR Frosted Lens
 - MDLS Linear Spread Lens
 - MDHS Heavy Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

Light efficiency:


61 Lumen/Watt

Light quality:

CRI: 90.4

Color temperature:

3000 K

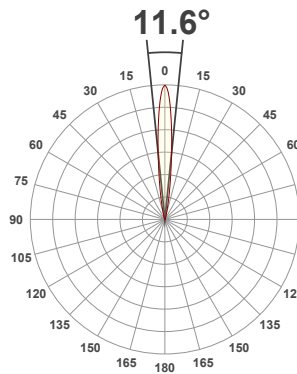

Product name:

**TubeLED Midi Surface Shallow
3000K 12° 500mA**


Item number:

075-SM-SH-30-12-500mA


**Delivered information for
above fixture and LED
combination.**

Output: 1340 Lumen Peak intensity: 20036 cd Power consumption: 22.0


CRI R values

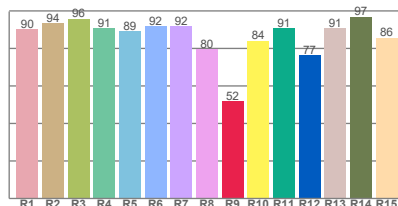

TM30 C Values

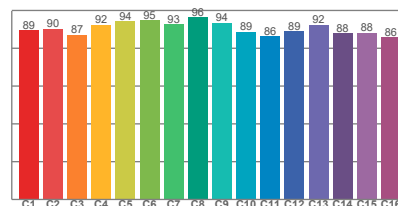


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	90.4	51.8	90.6	99.2	89.1	0.437	0.404	0.251	0.349	0.0010

Beam details

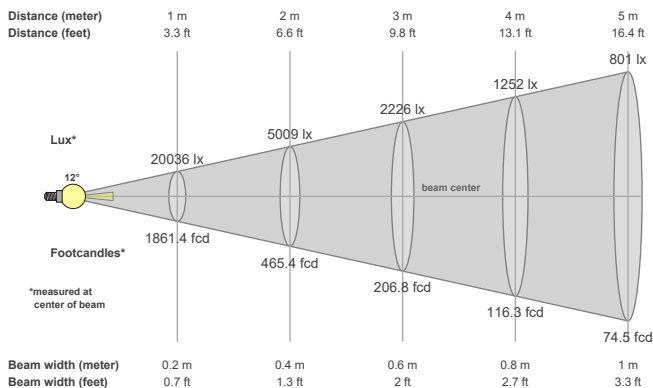

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
11.6°	24.1°	35.7°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
20036 cd	99.4%	98.6%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
20036lx	5009lx	2226lx	1252lx	801lx	557lx	409lx	313lx	247lx	200lx	166lx	139lx	119lx	102lx	89lx	78lx	69lx	62lx	56lx	50lx
1861.4fcd	465.4fcd	206.8fcd	116.3fcd	74.5fcd	51.7fcd	38fcd	29.1fcd	23fcd	18.6fcd	15.4fcd	12.9fcd	11fcd	9.5fcd	8.3fcd	7.3fcd	6.4fcd	5.7fcd	5.2fcd	4.7fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1

4000K = 1.084

Light efficiency:


54 Lumen/Watt

Light quality:

CRI: 90.4

Color temperature:

3000 K

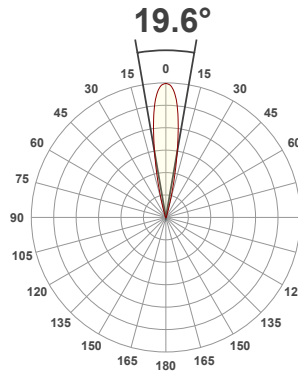

Product name:

**TubeLED Midi Surface Shallow
3000K 19° 500mA**


Item number:

075-SM-SH-30-19-500mA


**Delivered information for
above fixture and LED
combination.**

Output: 1185 Lumen Peak intensity: 9215 cd Power consumption: 22.0


CRI R values

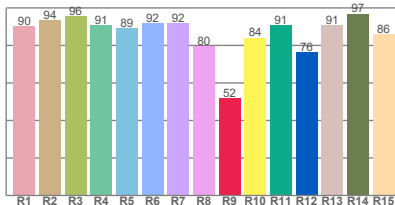

TM30 C Values

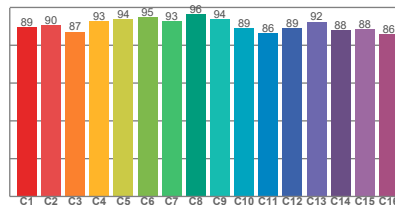


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	90.4	52.0	90.6	99.3	89.2	0.437	0.404	0.250	0.348	0.0010

Beam details

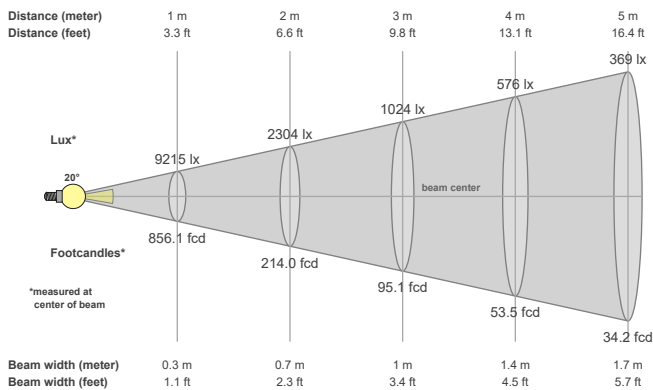

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
19.6°	31.9°	43°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
9215 cd	99.6%	98.7%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
9215lx	2304lx	1024lx	576lx	369lx	256lx	188lx	144lx	114lx	92lx	76lx	64lx	55lx	47lx	41lx	36lx	32lx	28lx	26lx	23lx
856.1fcd	214fcd	95.1fcd	53.5fcd	34.2fcd	23.8fcd	17.5fcd	13.4fcd	10.6fcd	8.6fcd	7.1fcd	5.9fcd	5.1fcd	4.4fcd	3.8fcd	3.3fcd	3fcd	2.6fcd	2.4fcd	2.1fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1

4000K = 1.084

Light efficiency:


56 Lumen/Watt

Light quality:

CRI: 90.4

Color temperature:

3000 K

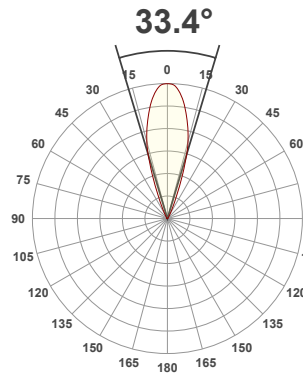

Product name:

**TubeLED Midi Surface Shallow
3000K 34° 500mA**


Item number:

075-SM-SH-30-34-500mA


**Delivered information for
above fixture and LED
combination.**

Output: 1226 Lumen Peak intensity: 3923 cd Power consumption: 22.0


CRI R values

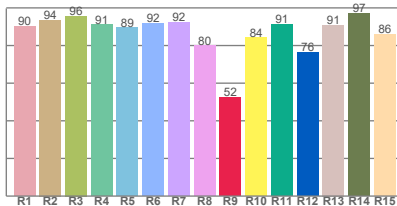

TM30 C Values

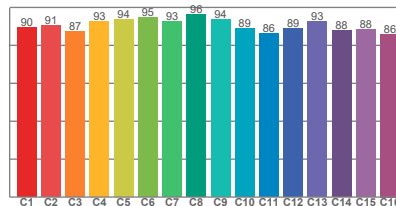


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	90.4	52.3	90.6	99.4	89.2	0.437	0.404	0.250	0.348	0.0010

Beam details

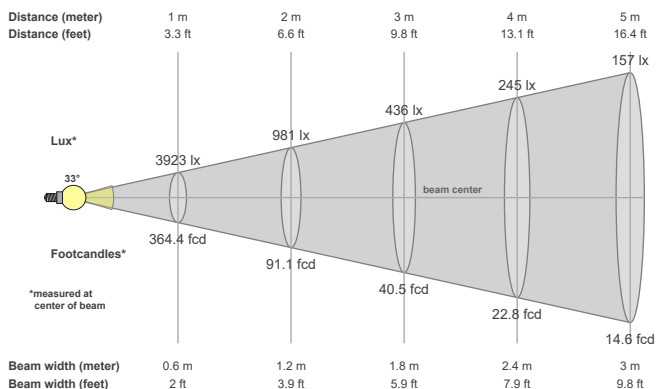

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
33.4°	49.8°	66.7°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
3923 cd	99.5%	98.5%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3923lx	981lx	436lx	245lx	157lx	109lx	80lx	61lx	48lx	39lx	32lx	27lx	23lx	20lx	17lx	15lx	14lx	12lx	11lx	10lx
364.4fcd	91.1fcd	40.5fcd	22.8fcd	14.6fcd	10.1fcd	7.4fcd	5.7fcd	4.5fcd	3.6fcd	3fcd	2.5fcd	2.2fcd	1.9fcd	1.6fcd	1.4fcd	1.3fcd	1.1fcd	1fcd	0.9fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1
4000K = 1.084