





Oculus Accent Trim

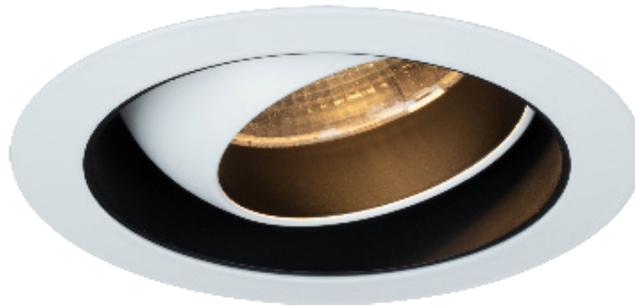

Ø65mm (2.56") adjustable downlight with eyeball mechanism, offering 30° adjustment in all directions. Available with a standard trim kit or 3 flush trim options, depending on ceiling type and finish.

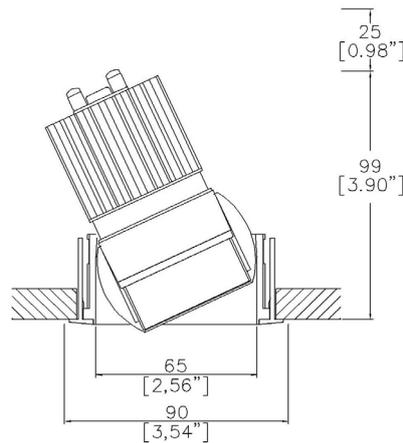

Oculus with Trim Kit TR1 ⁽¹⁾
Cut-out Ø82mm (Ø3,22"). Required depth height +25mm.

TM65.2 8 kgCO₂e

TM66 2.5 CEAM



LED Source	LED51/Q-HO	LED51/Q-HO	LED51/Q-HO	LED51/Q-HO	LED51/Q-HO
CCT	3000K	3000K	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA	350mA	350mA
Power inc Driver	14.0W	14.0W	14.0W	14.0W	14.0W
Beam Angle	SP (12°)	NF (16°)	MF (22°)	FL (34°)	WFL (53°)
Delivered Lumens	1301	1649	1809	1729	1489
Delivered Intensity cd	16940	12726	10381	5040	2178
Delivered Lumens per circuit watt	93	118	129	124	106
Forward Volt	34V	34V	34V	34V	34V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI



Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 4000K x 1.02.

Project Ref: _____

Location Ref: _____

Fixture Order Code: - - - - - -

Fixture	OC010	OculusAccent for LED
Installation	TR1 ⁽¹⁾	Trim for Existing Ceilings (ceiling thickness 5-25mm)
Oculus Finish	WH02	Textured Matt White RAL 9010
	BK02	Textured Matt Black RAL 9005
	RL99*	Custom RAL Colour*
	ABR1	Antique Brass
	ABZ1	Antique Bronze
	PCH1	Polished Chrome
	PNK1	Polished Nickel
	PBR1	Polished Brass
Internal Finish	WH02	Textured Matt White RAL 9010
	BK02	Textured Matt Black RAL 9005
	RL99*	Custom RAL Colour*
	ABR1	Antique Brass
	ABZ1	Antique Bronze
Trim Finish	WH02	Textured Matt White RAL 9010
	BK02	Textured Matt Black RAL 9005
	RL99*	Custom RAL Colour*
	ABR1	Antique Brass
	ABZ1	Antique Bronze
	PCH1	Polished Chrome
	PNK1	Polished Nickel
	PBR1	Polished Brass
IP Rating	54	IP54
	65	IP65
Fire Rating	0	No Fire Rating
	FR ⁽²⁾	Fire Rated



Trim Kit for Existing Ceilings

(1) For any ceiling thickness or construction type not shown please contact Lucent

(2) Tested and approved to EN 1363-1:2020 and EN 1365-2:2014 for 60 minutes Fire Rating.

Module Order Code: - -

LED	LED51/Q-HO	LED50 ONE QUANTUM HO
CCT	27	2700K
	30	3000K
	40 ⁽³⁾	4000K
Beam	SP	Spot
	NF	Narrow Flood
	MF	Medium Flood
	FL	Flood
	WFL	Wide Flood

(3) contact Lucent for availability

Driver Options:

Protocol	S	Non-Dim
	A	Analogue (0-10v)
	P	Phase
	D	DALI
	B	Bluetooth**

Emergency Options:

Emergency	E	Maintained 3hr Emergency
	ED	Maintained 3hr DALI Self Test
	ES	Maintained 3hr Self Test

Finish selection




Antique Brass



Antique Bronze



Polished Brass




Polished Nickel




Polished Chrome

Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

Louvre/Lens

- LL45 Honeycomb Louvre
- LLDF Diffusing Lens
- LLFR Frosted Lens
- LLLS Linear Spread Lens
- LLHS Heavy Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.