




Oculus Accent Trimless

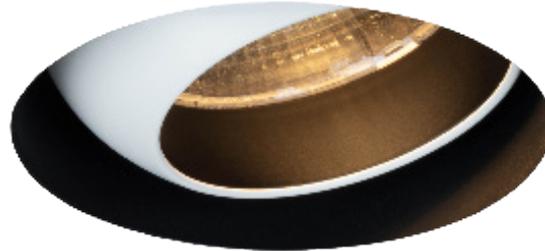


TM65.2 8 kgCO₂e


TM66 2.5 CEAM

**BUILD
BACK
BETTER**
GOLD
GREEN


Ø65mm (2.56") adjustable downlight with eyeball mechanism, offering 30° adjustment in all directions. Available with a standard trim kit or 3 flush trim options, depending on ceiling type and finish.

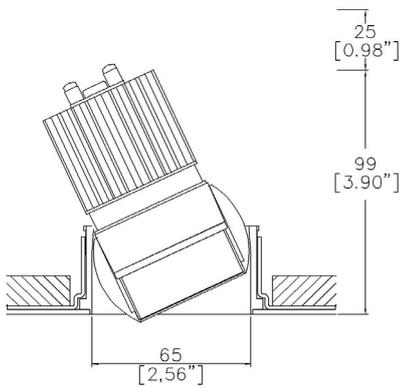

Oculus with Trimless.
Kit TL1⁽¹⁾ (front fitting, full skim)
Cut-out Ø82mm (Ø3,22").
Required depth height +25mm.

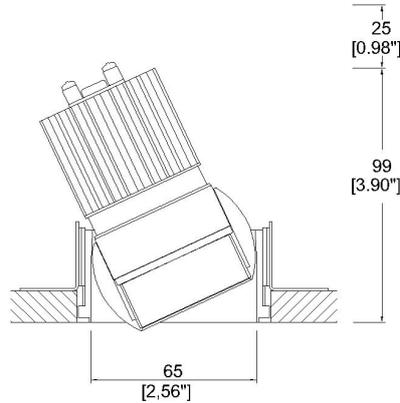

Oculus with Trimless.
Kit TL2⁽¹⁾ (rear fitting, partial skim)
Cut-out Ø81mm (Ø3,19").
Required depth height +25mm.

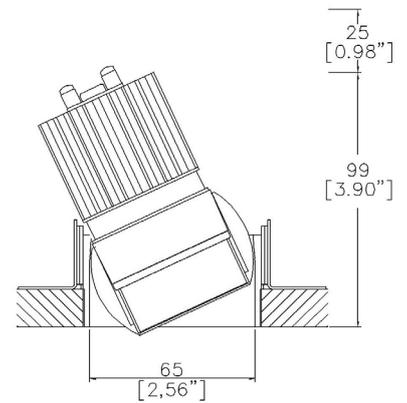

Oculus with Trimless Appearance Kit
TL3⁽¹⁾ (rear fitting, solid ceiling)
Cut-out Ø68mm (Ø2,67").
Required depth height +25mm.

LED Source	LED51/Q-HO	LED51/Q-HO	LED51/Q-HO	LED51/Q-HO	LED51/Q-HO
CCT	3000K	3000K	3000K	3000K	3000K
Drive Current	350mA	350mA	350mA	350mA	350mA
Power inc Driver	14.0W	14.0W	14.0W	14.0W	14.0W
Beam Angle	SP (12°)	NF (16°)	MF (22°)	FL (34°)	WFL (53°)
Delivered Lumens	1301	1649	1809	1729	1489
Delivered Intensisty cd	16940	12726	10381	5040	2178
Delivered Lumens per circuit watt	93	118	129	124	106
Forward Volt	34V	34V	34V	34V	34V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI



Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 4000K x 1.02.

Project Ref: _____

Location Ref: _____

Please only complete one of the following code builders

Non Fire Rated Code Builder

Fixture Order Code: - - - - -

Fixture	<input type="text" value="OC010"/>	Oculus Accent for LED
Installation ⁽¹⁾	<input type="text"/>	TL1 Trimless for Full Skim TL2 Trimless for Partial Skim ceilings (5-25mm total thickness) TL3 Trimless for Solid Ceilings (5-25mm total thickness) TL4 ⁽²⁾ Trimless for Partial Skim ceilings (25-30mm total thickness) TL5 ⁽²⁾ Trimless for Solid Ceilings (25-30mm total thickness)
Oculus Finish	<input type="text"/>	WH02 Textured Matt White RAL 9010 BK02 Textured Matt Black RAL 9005 RAL* Custom RAL Colour* ABR1 Antique Brass ABZ1 Antique Bronze PCH1 Polished Chrome PNK1 Polished Nickel PBR1 Polished Brass
Internal Finish	<input type="text"/>	WH02 Textured Matt White RAL 9010 BK02 Textured Matt Black RAL 9005 RAL* Custom RAL Colour* ABR1 Antique Brass ABZ1 Antique Bronze
IP Rating	<input type="text"/>	54 IP54 65 IP65
Fire Rating	<input type="text" value="0"/>	No Fire Rating

Fire Rated Code Builder

Fixture Order Code: - - - - -

Fixture	<input type="text" value="OC010"/>	Oculus Accent for LED
Installation ⁽¹⁾	<input type="text"/>	TL1 Trimless for Full Skim TL4 ⁽²⁾ Trimless for Partial Skim ceilings (25-30mm total thickness)
Oculus Finish	<input type="text"/>	WH02 Textured Matt White RAL 9010 BK02 Textured Matt Black RAL 9005 RL99* Custom RAL Colour* ABR1 Antique Brass ABZ1 Antique Bronze PCH1 Polished Chrome PNK1 Polished Nickel PBR1 Polished Brass
Internal Finish	<input type="text"/>	WH02 Textured Matt White RAL 9010 BK02 Textured Matt Black RAL 9005 RL99* Custom RAL Colour* ABR1 Antique Brass ABZ1 Antique Bronze
IP Rating	<input type="text"/>	54 IP54 65 IP65
Fire Rating	<input type="text" value="FR"/>	FR ⁽³⁾ Fire Rated

Project Ref: _____ Location Ref: _____

Module Order Code: - -

LED
LED51/Q-HO LED50 ONE QUANTUM HO

CCT
27 2700K
30 3000K
40 (4) 4000K

Beam
SP Spot
NF Narrow Flood
MF Medium Flood
FL Flood
WFL Wide Flood

(4) contact Lucent for availability

Driver Options:

Protocol
S Non-Dim
A Analogue (0-10v)
P Phase
D DALI
B Bluetooth**

Emergency Options:

Emergency
E Maintained 3hr Emergency
ED Maintained 3hr DALI Self Test
ES Maintained 3hr Self Test

- (1) For any ceiling thickness or construction type not shown please contact Lucent
- (2) Adjustment may be limited in thicker ceiling constructions. Refer to installation instructions for details.
- (3) Tested and approved to EN 1363-1:2020 and EN 1365-2:2014 for 60 minutes Fire Rating.
- (4) contact Lucent for availability

Installation Kits



TL1 Trimless Kit, Full Skim




TL2 Trimless Kit Partial Skim



TL3 Trimless Kit, Solid

Finish selection




Antique Brass



Antique Bronze



Polished Brass




Polished Nickel



Polished Chrome

Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

- Louvre/Lens
- LL45 Honeycomb Louvre
- LLDF Diffusing Lens
- LLFR Frosted Lens
- LLLS Linear Spread Lens
- LLHS Heavy Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.