


ProSpex Plus Mini Round Wallwash Trim

TM65.2	11kgCO2e
TM66	2.3 CEAM



90mm (3.54”) overall trim diameter. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available.

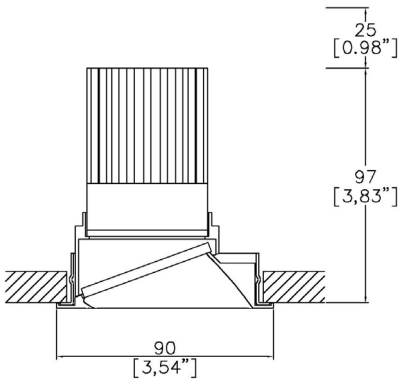

750+LED-TR-WW  
Cut-out Ø82mm  
Trim Kit  
Required dept height+25mm^

LED Source	LED51/3
CCT	3000K
Drive Current	350mA
Power inc Driver	14.8W
Beam Angle	WW
Delivered Lumens	689
Delivered Intensisty cd	667
Efficacy lm/w	47
Forward Volt	36V
CRI	≥90 CRI



Apply these factors to 3000K for lumen output of other CCTs: 2200K x 0.65 / 2400K x 0.69 / 2700K x 0.98 / 4000K x 1.02.

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Fixture Order Code: 

750+LED-TR-WW

 -  -

Fixture  
750+LED-TR-WW Plus Mini Conical Wallwash Trim with LED51

Finish  
WH White RAL 9010  
BK Black RAL 9005  
RAL\* Custom RAL Colour\*  
ABR1 Antique Brass  
ABZ1 Antique Bronze  
PCH1 Polished Chrome  
PNK1 Polished Nickel  
PBR1 Polished Brass

IP Rating  
44 IP44  
54 IP54



Module Order Code: 

LED51/3

 -  - 

WFL

LED  
LED51/3 LED50 ONE GEN 3

CCT  
22 (3) 90 CRI 2200K  
24 (3) 90 CRI 2400K  
27 90 CRI 2700K  
30 90 CRI 3000K  
40 (3) 90 CRI 4000K

Beam  
WFL Wide Flood

(3) contact Lucent for availability

Driver Options:

Protocol  
S Non-Dim  
A Analogue (0-10v)  
P Phase  
D DALI  
B Bluetooth\*\*

Emergency Options:

Emergency  
E Maintained 3hr Emergency  
ED Maintained 3hr DALI Self Test  
ES Maintained 3hr Self Test

Finish selection



Antique Brass



Antique Bronze



Polished Brass



Polished Nickel



Polished Chrome

Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE