



ProSpex Square Edge60 Accent



65 x 65mm (2.56" x 2.56") overall dimension. 360° rotation. Up to 30° tilt. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available. Required depth height + 15mm^

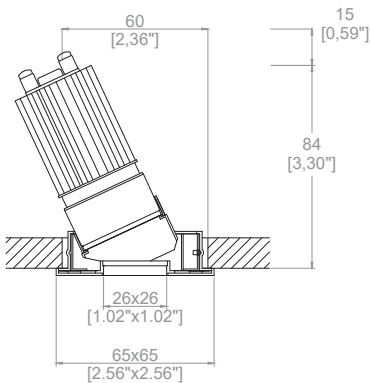

61433-A-LED + 6000-PBZ-SQ
Cut-out Ø 60mm

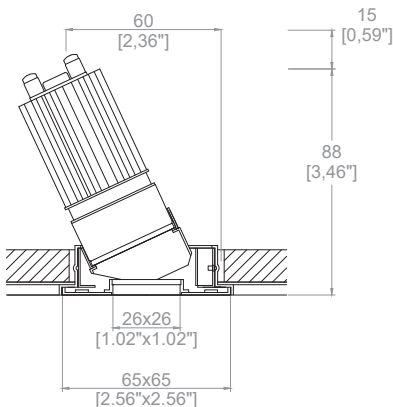

61433-A-LED + 6000-PCZ-SQ
Cut-out Ø 60mm

| LED Source | LED35/Q-HO | LED35/Q-HO | LED35/Q-HO | LED35/Q-HO |
|-------------------------|------------|------------|------------|------------|
| CCT | 3000K | 3000K | 3000K | 3000K |
| Drive Current | 250mA | 250mA | 250mA | 250mA |
| Power inc Driver | 9.4W | 9.4W | 9.4W | 9.4W |
| Beam Angle | NF (17°) | MF (21°) | FL (30°) | WFL (40°) |
| Delivered Lumens | 676 | 822 | 739 | 600 |
| Delivered Intensisty cd | 5301 | 5323 | 2956 | 1181 |
| Efficacy lm/w | 72 | 87 | 78 | 64 |
| Forward Volt | 33V | 33V | 33V | 33V |
| CRI | ≥95 CRI | ≥95 CRI | ≥95 CRI | ≥95 CRI |

Project Ref: _____

Location Ref: _____

Fixture Order Code:

61433-A-LED

 - -

Fixture

60413-A-LED

Square Edge60 Accent

Finish

WH
BK
RAL

White
Black
Custom RAL Colour*

IP Rating

54

IP54

Installation Order Code:

Installation

6000-PBZ
6000-PCZ

Trim kit for trimmed appearance
Plaster-kit for seamless flush appearance



LED Order Code:

LED35/Q-HO

 - - - -

LED

LED35/Q-HO

LED35 QUANTUM HE High Output

CCT

27
30
40***

90 CRI 2700K
90 CRI 3000K
90 CRI 4000K***

Beam

NF
MF
FL
WFL

Narrow Flood
Medium Flood
Flood
Wide Flood

***contact Lucent for availability

Driver Options:

Protocol

S
A
P
D
B

Non-Dim
Analogue (0-10v)
Phase
DALI
Bluetooth**

Emergency Options:

Emergency

E
ED
ES

Maintained 3hr Emergency
Maintained 3hr DALI Self Test
Maintained 3hr Self Test



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens



Warm Tone

Accessories Order Code:

- Louvre/Lens
- LS45 Honeycomb Louvre
 - LSCC Warm Tone Lens
 - LSUV UV Lens
 - LSDF Diffusing Lens
 - LSFR Frosted Lens
 - LSLS Linear Spread Lens
 - LSHS Heavy Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE