




ProSpex Square Edge60 Fixed


TM65.2	4kgCO2e
TM66	2.4 CEAM



65 x 65mm (2.56" x 2.56") overall dimension. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available.

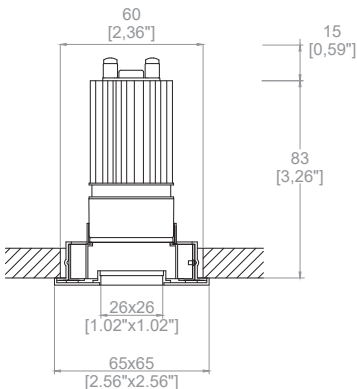

61433-F-LED + 6000-PBZ-SQ  
Cut-out Ø 60mm  
Required depth height + 15mm^

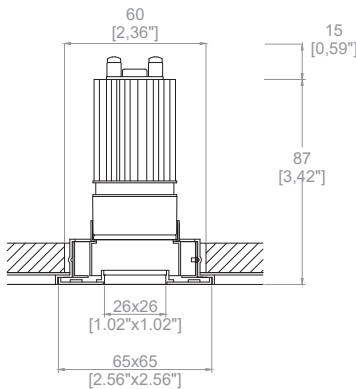

61433-F-LED + 6000-PCZ-SQ  
Cut-out Ø 60mm  
Required depth height + 15mm^

LED Source	LED35/Q-HE	LED35/Q-HE	LED35/Q-HE	LED35/Q-HE
CCT	3000K	3000K	3000K	3000K
Drive Current	150mA	150mA	150mA	150mA
Power inc Driver	6.0W	6.0W	6.0W	6.0W
Beam Angle	NF (18°)	MF (22°)	FL (30°)	WFL (42°)
Delivered Lumens	367	524	482	399
Delivered Intensisty cd	2878	3166	1769	785
Efficacy lm/w	61	87	80	66
Forward Volt	33V	33V	33V	33V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI



Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 4000K x 1.02.

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Fixture Order Code: 

61433-F-LED

 -  -

Fixture

60413-A-LED

Square Edge60 Fixed

Finish

WH  
BK  
RAL

White  
Black  
Custom RAL Colour\*

IP Rating

54

IP54

Installation Order Code:

Installation

6000-PBZ  
6000-PCZ

Trim kit for trimmed appearance  
Plaster-kit for seamless flush appearance



LED Order Code: 

LED35/Q-HE

 -  -  -

LED

LED35/Q-HE

LED35 QUANTUM High Efficacy

CCT

27  
30  
40

90 CRI 2700K  
90 CRI 3000K  
90 CRI 4000K (1)

Beam

NF  
MF  
FL  
WFL

Narrow Flood  
Medium Flood  
Flood  
Wide Flood

(1) contact Lucent for availability

Driver Options:

Protocol

S  
A  
P  
D  
B

Non-Dim  
Analogue (0-10v)  
Phase  
DALI  
Bluetooth\*\*

Emergency Options:

Emergency

E  
ED  
ES

Maintained 3hr Emergency  
Maintained 3hr DALI Self Test  
Maintained 3hr Self Test

Finish selection



Antique Brass



Antique Bronze



Polished Brass



Polished Nickel



Polished Chrome

Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

- Louvre/Lens
- LS45

LSDF

LSFR

LSLS

LSHS
- Honeycomb Louvre

Diffusing Lens

Frosted Lens

Linear Spread Lens

Heavy Spread Lens

Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE