


LED35 GEN3 Ambiance WarmDim



35mm (1.37") overall diameter. Single optic Ambiance WarmDim LED module. For use in most ProSpex LED luminaires. Max drive current 350mA. Dimmable with the correct driver type.

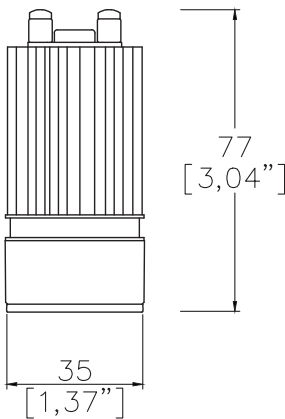

LED35/3-WD

Module Type	LED35/3-WD		
CCT	3000K		
CRI	≥90 CRI		
Drive Current	350mA		
Module Power	6.3W		
System Power (inc. driver)	7.4W		
Forward Volt	18V		
MacAdam Ellipse	3-Step		
Operating Temperature	-20°C to 35°C		
Lifetime	TBC		
Beam Angle	NF (20°)	FL (36°)	WFL (50°)
Module Lumens	652	629	604
Module Intensisty cd	3264	1269	675
Module Efficacy lm/w	103	100	96

Module Order Code:

LED35/3-WD

 - -

LED

LED35/3-WD

LED35 GEN3 Ambiance WarmDim

CCT

2718 (3)

3018

2700K-1800K

3000K-1800K

Beam

NF

FL

WFL

Narrow Flood

Flood

Wide Flood

(3) contact Lucent for availability

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE