


LED35 GEN3 Dynamic Tuneable White




35mm (1.37") overall diameter. Single optic Dynamic Tuneable White LED module. For use in most ProSpex LED luminaires. Max drive current 350mA. Dimmable with the correct driver type.

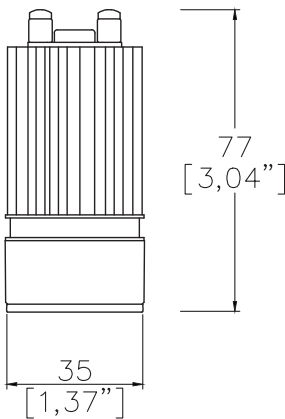

LED35/3-TW

Module Type	LED35/3-TW		
CCT range	6500K - 2700K		
	@ 4000K		
CRI	≥90 CRI		
Drive Current (max per channel)	250mA		
Module Power	8.3W		
System Power (inc. driver)	9.8W		
Forward Volt (max per channel)	33.1V		
MacAdam Ellipse	3-Step		
Operating Temperature	-20°C to 35°C		
Lifetime	TBC		
Beam Angle	NF (21°)	FL (37°)	WFL (XX°)
Module Lumens	814	752	689
Module Intensisty cd	4203	1620	852
Module Efficacy lm/w	102	94	86

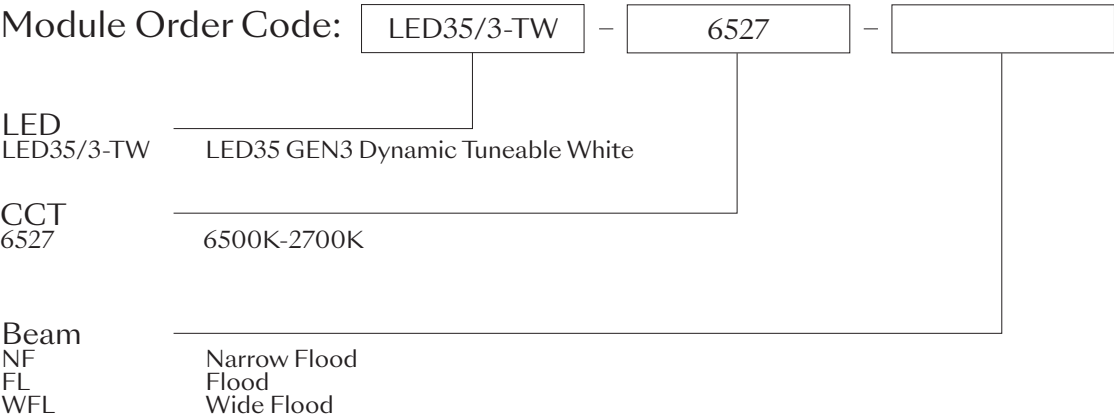

(3) contact Lucent for availability

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

DALI Type 6 requires two DALI addresses, one for CCT control the other for Intesisty control. DALI Type 8 is a single DALI Type 8 address for CCT and Intesisty control. Please check which control system is being used before specifying.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE