

Light efficiency:


41 Lumen/Watt

Light quality:

CRI: 91.2

Color temperature:

3000 K

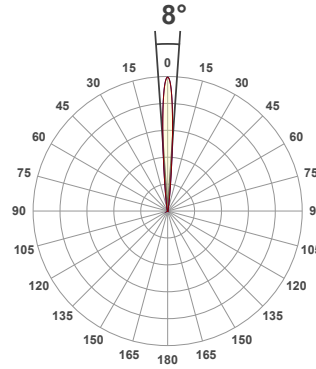

Product name:

**90413-F_A-LED - LED51_3-SS-30
- 1000mA**


Item number:

**Pinhole90 Fixed/Accent -
LED51/3-SS-30 - 1000mA**


**Delivered information for above
fixture and LED combination.**

Output: 560 Lumen Peak intensity: 18121 cd Power consumption: 13.5


CRI R values

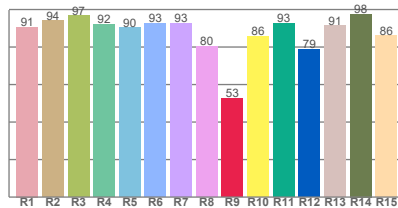

TM30 C Values

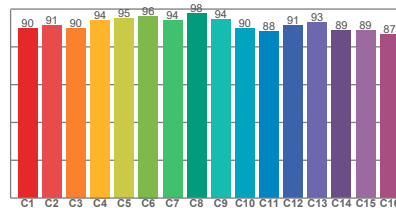


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	91.2	52.6	91.8	98.7	90.6	0.437	0.404	0.251	0.348	0.0022

Beam details

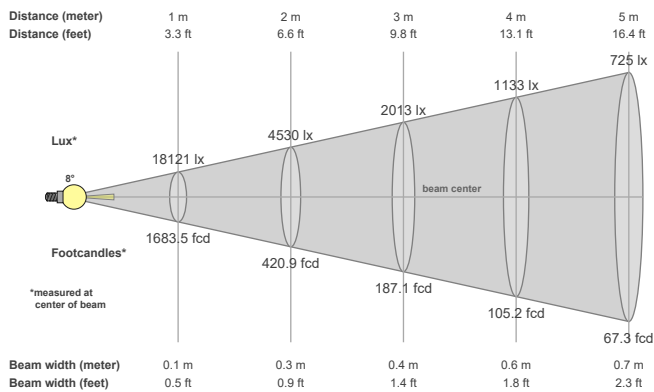

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
8°	15.5°	26.4°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
18121 cd	100.0%	100.0%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
18121lx	4530lx	2013lx	1133lx	725lx	503lx	370lx	283lx	224lx	181lx	150lx	126lx	107lx	92lx	81lx	71lx	63lx	56lx	50lx	45lx
1683.5fcd	420.9fcd	187.1fcd	105.2fcd	67.3fcd	46.8fcd	34.4fcd	26.3fcd	20.8fcd	16.8fcd	13.9fcd	11.7fcd	10fcd	8.6fcd	7.5fcd	6.6fcd	5.8fcd	5.2fcd	4.7fcd	4.2fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website.

For information regarding other colour temperatures please refer to ies/ldt files available on the website.

Light planning Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-1.3	-1.1	-1.3	-0.9	-0.8	-1.3	-1.1	-1.3	-0.9	-0.8
	3H	-1.7	-1.2	-1.3	-1.1	-0.9	-1.7	-1.2	-1.3	-1.1	-0.9
	4H	-1.8	-1.3	-1.4	-1.1	-0.9	-1.8	-1.3	-1.4	-1.1	-0.9
	6H	-1.8	-1.4	-1.5	-1.1	-0.8	-1.8	-1.4	-1.5	-1.1	-0.8
	8H	-1.8	-1.5	-1.5	-1.1	-0.8	-1.8	-1.5	-1.5	-1.1	-0.8
	12H	-1.5	-1.2	-1.2	-0.8	-0.4	-1.5	-1.2	-1.2	-0.8	-0.4
4H	2H	-1.8	-1.3	-1.4	-1.1	-0.9	-1.8	-1.3	-1.4	-1.1	-0.9
	3H	-1.9	-1.5	-1.5	-1.2	-0.8	-1.9	-1.5	-1.5	-1.2	-0.8
	4H	-2.0	-1.7	-1.6	-1.3	-0.8	-2.0	-1.7	-1.6	-1.3	-0.8
	6H	-2.1	-1.7	-1.6	-1.4	-1.1	-2.1	-1.7	-1.6	-1.4	-1.1
	8H	-2.1	-1.8	-1.6	-1.5	-1.1	-2.1	-1.8	-1.6	-1.5	-1.1
	12H	-1.6	-1.3	-1.1	-0.9	-0.4	-1.6	-1.3	-1.1	-0.9	-0.4
8H	4H	-2.2	-1.8	-1.7	-1.5	-1.1	-2.2	-1.8	-1.7	-1.5	-1.1
	6H	-2.2	-2.0	-1.7	-1.6	-1.1	-2.2	-2.0	-1.7	-1.6	-1.1
	8H	-2.2	-2.0	-1.7	-1.5	-0.9	-2.2	-2.0	-1.7	-1.5	-0.9
	12H	-1.1	-1.0	-0.5	-0.5	0.1	-1.1	-1.0	-0.5	-0.5	0.1
12H	4H	-2.3	-2.0	-1.7	-1.6	-1.1	-2.3	-2.0	-1.7	-1.6	-1.1
	6H	-2.2	-2.1	-1.7	-1.6	-1.0	-2.2	-2.1	-1.7	-1.6	-1.0
	8H	-2.2	-2.1	-1.6	-1.6	-1.0	-2.2	-2.1	-1.6	-1.6	-1.0
Variation of the observer position for the luminaire distance S											
S = 1.0H		4.3 / -2.4					4.3 / -2.4				
S = 1.5H		6.8 / -2.6					6.8 / -2.6				
S = 2.0H		8.8 / -2.8					8.8 / -2.8				
Corrected glare indices referring to 560 lm total luminous flux											