


Soft70 Gen2 Accent Trimless

TM65.2 11kgCO2e


TM66 2.5 CEAM




Ø70mm (2.76") overall trimless.
 30° Tilt in all directions. Available with standard trim kit or 3 flush trim options, depending on ceiling type and finish.
 Family of matching products also available.

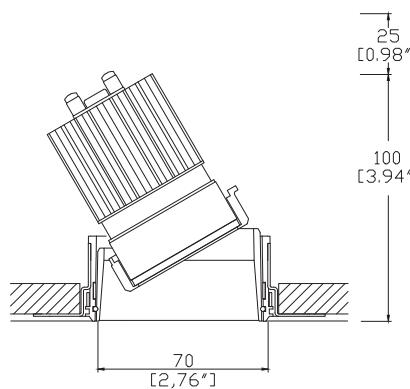

Soft70 Gen2 with Trimless
 Kit TL1⁽¹⁾ (front fitting, full skim)
 Cut-out Ø83mm (Ø3,26").
 Required depth height +25mm.

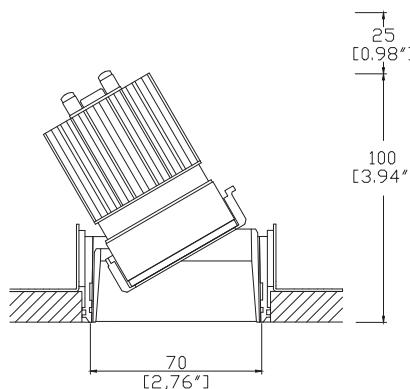

Soft70 Gen2 with Trimless
 Kit TL2⁽¹⁾ (rear fitting, partial skim)
 Cut-out Ø82mm (Ø3,22").
 Required depth height +25mm.

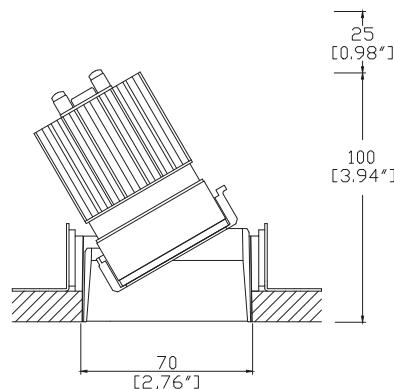

Soft70 Gen2 with Trimless
 Kit TL3⁽¹⁾ (rear fitting, solid ceiling)
 Cut-out Ø70mm (Ø2,75").
 Required depth height +25mm.

LED Source	LED51/3-SS
CCT	3000K
Drive Current	1000mA
Power inc Driver	13.5W
Beam Angle	SS (8°)
Delivered Lumens	632
Delivered Intensity cd	19040
Efficacy lm/w	46
Forward Volt	11.5V
CRI	≥90 CRI

Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.92 / 4000K x 1.053.

Project Ref: _____

Location Ref: _____

Please only complete one of the following code builders

Non Fire Rated Code Builder

Fixture Order Code: - - - -

Fixture SF70210 Soft70 Gen2 Accent for LED

Installation ⁽¹⁾
 TL1 Trimless for Full Skim
 TL2 Trimless for Partial Skim ceilings (5-22mm total thickness)
 TL3 Trimless for Solid Ceilings (5-22mm total thickness)
 TL4 ⁽²⁾ Trimless for Partial Skim ceilings (25-30mm total thickness)
 TL5 ⁽²⁾ Trimless for Solid Ceilings (25-30mm total thickness)

Finish
 WH03 White RAL 9016
 BK01 Black RAL 9005
 RAL* Custom RAL Colour*
 ABR1 Antique Brass
 ABZ1 Antique Bronze
 PCH1 Polished Chrome
 PNK1 Polished Nickel
 PBR1 Polished Brass

IP Rating
 20 IP20
 65 IP65

Fire Rating
 0 No Fire Rating

Fire Rated Code Builder

Fixture Order Code: - - - -

Fixture SF70210 Soft70 Gen2 Accent for LED

Installation ⁽¹⁾
 TL1 Trimless for Full Skim
 TL4 ⁽²⁾ Trimless for Partial Skim ceilings (25-30mm total thickness)

Finish
 WH03 White RAL 9016
 BK01 Black RAL 9005
 RAL* Custom RAL Colour*
 ABR1 Antique Brass
 ABZ1 Antique Bronze
 PCH1 Polished Chrome
 PNK1 Polished Nickel
 PBR1 Polished Brass

IP Rating
 20 IP20
 65 IP65

Fire Rating
 FR ⁽³⁾ Fire Rated

⁽¹⁾ For any ceiling thickness or construction type not shown please contact Lucent⁽²⁾ Adjustment may be limited in thicker ceiling constructions. Refer to installation instructions for details.⁽³⁾ Tested and approved to EN 1363-1:2020 and EN 1365-2:2014 for 60 minutes Fire Rating.

Project Ref: _____

Location Ref: _____

Module Order Code: LED51/3-SS -

LED	LED51/3-SS	LED50 ONE GEN3 SuperSpot
CCT		
27	90 CRI 2700K	
30	90 CRI 3000K	
40 (4)	90 CRI 4000K	

(4) contact Lucent for availability




Driver Options:

Protocol	
S	Non-Dim
A	Analogue (0-10v)
P	Phase
D	DALI
B	Bluetooth**

Emergency Options:

Emergency	
E	Maintained 3hr Emergency
ED	Maintained 3hr DALI Self Test
ES	Maintained 3hr Self Test

Installation Kits



TL1 Trimless Kit, full skim TL2 Trimless Kit, partial skim TL3 Trimless Kit, solid ceiling


Finish selection



Antique Brass



Antique Bronze



Polished Brass




Polished Nickel



Polished Chrome

Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

Louvre/Lens

LL45	Honeycomb Louvre
LLDF	Diffusing Lens
LLFR	Frosted Lens
LLLS	Linear Spread Lens
LLHS	Heavy Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.