
Soft70 Gen2 Fixed Trim

TM65.2	11kgCO2e
TM66	2.5 CEAM



Ø90mm (3.54”) overall trim. Ø70mm (2.76”) overall trimless. Available with standard trim kit or 3 flush trim options, depending on ceiling type and finish.
Family of matching products also available.

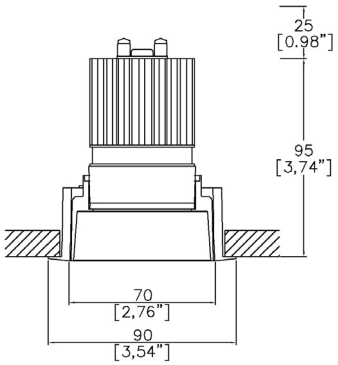

SF70200-TR1 (1)
Cut-out Ø82mm (Ø3,22”).
Required depth height + 25mm^

LED Source	LED51/3-TW		LED51/3-TW		LED51/3-TW	
CRI	≥90 CRI		≥90 CRI		≥90 CRI	
Drive Current	350mA		350mA		350mA	
Power inc Driver	15.4W		15.4W		15.4W	
Beam Angle	NF (20°)		FL (37°/33°)		WFL (57°/52°)	
Forward Volt	36V		36V		36V	
CCT	6527	4018	6527	4018	6527	4018
Delivered Lumens	1282	1083	1254	1099	1107	967
Delivered Intensisty cd	6963	5931	3026	2966	1177	1175
Delivered Lumens per circuit watt	83	70	81	71	71	62

Note: Performance data is based on the Highest CCT of each module type. Refer to the table on the last page for the factors.

Copyright © 2026 Lucent Lighting Ltd.

Project Ref:_____ Location Ref:_____

Complete one of the following code builders

Non Fire Rated Code Builder

Fixture Order Code: SF70200 – TR1 – [ ] – [ ] – [ ] – 0

Fixture
SF70200 Soft70 Gen2 Fixed for LED

Installation
TR1 Trim for Existing Ceilings (ceiling thickness 25mm max)

Body Finish
WH03 White RAL 9016
BK01 Black RAL 9005
RAL* Custom RAL Colour*
ABR1 Antique Brass
ABZ1 Antique Bronze

Trim Finish
WH03 White RAL 9016
BK01 Black RAL 9005
RAL* Custom RAL Colour*
ABR1 Antique Brass
ABZ1 Antique Bronze

IP Rating
20 IP20
54 IP54
65 IP65

Fire Rating
0 No Fire Rating

Fire Rated Code Builder

Fixture Order Code: SF70200 – TR1 – [ ] – [ ] – [ ] – FR

Fixture
SF70200 Soft70 Gen2 Fixed for LED

Installation
TR1 Trim for Existing Ceilings (ceiling thickness 25mm max)

Body Finish
WH03 White RAL 9016
BK01 Black RAL 9005
RAL* Custom RAL Colour*
ABR1 Antique Brass
ABZ1 Antique Bronze

Trim Finish
WH03 White RAL 9016
BK01 Black RAL 9005
RAL* Custom RAL Colour*
ABR1 Antique Brass
ABZ1 Antique Bronze

IP Rating
54 IP54
65 IP65

Fire Rating
FR (3) Fire Rated

(1) For any ceiling thickness or construction type not shown please contact Lucent

(2) Adjustment may be limited in thicker ceiling constructions. Refer to installation instructions for details.

(3) Tested and approved to EN 1363-1:2020 and EN 1365-2:2014 for 60 minutes Fire Rating - It is recommended to set the required tilt prior to installation, as the front glass restricts adjustment from below (see image on page 3).

Copyright © 2026 Lucent Lighting Ltd.

Module Order Code: LED51/3-TW – [ ] – [ ]

LED
LED51/3-TW — LED50 ONE Gen3 Dynamic Tuneable White

CCT
4018 — 4000K - 1800K
6527 — 6500K - 2700K

Beam
NF — Narrow Flood
FL — Flood
WFL — Wide Flood


Driver Options: [ ]

Protocol
D6 — DALI Type 6**
D8 — DALI Type 8**
B — Bluetooth***

Emergency Options: [ ]

Emergency
E — Maintained 3hr Emergency
ED — Maintained 3hr DALI Self Test
ES — Maintained 3hr Self Test

Installation Kits



Trim Kit for Existing Ceilings

Finish selection



Antique Brass




Antique Bronze

Copyright © 2026 Lucent Lighting Ltd.

Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

Louvre/Lens

LL45	Honeycomb Louvre
LLDF	Diffusing Lens
LLFR	Frosted Lens
LLLS	Linear Spread Lens
LLHS	Heavy Spread Lens

Copyright © 2026 Lucent Lighting Ltd.

LED51/3-TW Factor and Wattage Information

All values given on page 1 and ies/ldt files are at the highest colour temperature. Use the below factors and wattages to calculate lumen output for other standard colour temperatures.

	LED51/3-TW-6527		LED51/3-TW-4018	
CCT	Lm Factor	System Wattage	Lm Factor	System Wattage
6500K	1.00	15.4		
5000K	1.06	14.7		
4000K	1.08	13.6	1.00	15.4
3000K	0.83	15.4	0.90	13.6
2700K	0.63	17	0.82	13.2
2400K			0.76	13.5
2200K			0.71	14
1800K			0.59	15.1

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**DALI Type 6 requires two DALI addresses, one for CCT control the other for Intesisty control. DALI Type 8 is a single DALI Type 8 address for CCT and Intesisty control. Please check which control system is being used before specifying.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE