



Mix60 Edge Fixed Trim

|        |          |
|--------|----------|
| TM65.2 | 3kgCO2e  |
| TM66   | 2.5 CEAM |

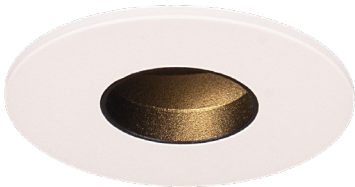

Ø62mm (2,44”) overall trim, Ø25mm (0,99”) aperture. Available with a standard trim kit or 3 flush trim options, depending on ceiling type and finish.

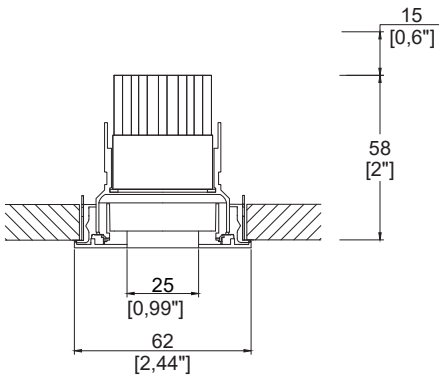

Mix60 Edge with Trim Kit TR1<sup>(1)</sup>  
Cut-out Ø 56mm  
Required depth height +15mm.

|                         |            |            |            |
|-------------------------|------------|------------|------------|
| LED Source              | LED35/2-SF | LED35/2-SF | LED35/2-SF |
| CCT                     | 3000K      | 3000K      | 3000K      |
| Drive Current           | 350mA      | 350mA      | 350mA      |
| Power inc Driver        | 7.4W       | 7.4W       | 7.4W       |
| Beam Angle              | 15°        | 24°        | 36°        |
| Delivered Lumens        | 487        | 474        | 460        |
| Delivered Intensisty cd | 3082       | 2179       | 1383       |
| Efficacy lm/w           | 66         | 64         | 62         |
| Forward Volt            | 18V        | 18V        | 18V        |
| CRI                     | ≥90 CRI    | ≥90 CRI    | ≥90 CRI    |

Apply these factors to 3000K for lumen output of other CCTs: 2200K x 0.65 / 2400K x 0.69 / 2700K x 0.98 / 4000K x 1.02.

Project Ref: \_\_\_\_\_ Location Ref: \_\_\_\_\_

Please only complete one of the following code builders

Non Fire Rated Code Builder

Fixture Order Code: MX60000-ED –  –  –  – 0

Fixture  
MX60000-ED

Installation <sup>(1)</sup>  
TR1  
TR2 <sup>(2)</sup>

Finish  
WH02  
BK02  
RAL\*  
ABR1  
ABZ1  
PCH1  
PNK1  
PBR1

IP Rating  
54  
65

Rating  
0

Mix60 Edge Fixed for LED

Trim for Existing Ceilings 5-15mm total thickness  
Trim for Existing Ceilings 15-28mm total thickness

White RAL 9010  
Black RAL 9005  
Custom RAL Colour\*  
Antique Brass  
Antique Bronze  
Polished Chrome  
Polished Nickel  
Polished Brass

IP54  
IP65

No Fire Rating

Fire Rated Code Builder

Fixture Order Code: MX60000-ED – TR2 –  –  – FR

Fixture  
MX60000-ED

Installation <sup>(1)</sup>  
TR2 <sup>(2)</sup>

Finish  
WH02  
BK02  
RAL\*  
ABR1  
ABZ1  
PCH1  
PNK1  
PBR1

IP Rating  
54  
65

Rating  
FR <sup>(3)</sup>

Mix60 Edge Fixed for LED

Trim for Existing Ceilings 15-28mm total thickness

White RAL 9010  
Black RAL 9005  
Custom RAL Colour\*  
Antique Brass  
Antique Bronze  
Polished Chrome  
Polished Nickel  
Polished Brass

IP54  
IP65

Fire Rated

(1) For any ceiling thickness or construction type not shown please contact Lucent

(2) Adjustment may be limited in thicker ceiling constructions. Refer to installation instructions for details.

(3) Tested and approved to EN 1363-1:2020 and EN 1365-2:2014 for 60 minutes fire rating.

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

LED Order Code:

LED35/2

SF

LED

LED35/2

LED35 GEN2

CCT

22\*\*\*

24\*\*\*

27

30

40\*\*\*

90 CRI 2200K\*\*\*

90 CRI 2400K\*\*\*

90 CRI 2700K

90 CRI 3000K

90 CRI 4000K\*\*\*

Beam

15

24

36

15°

24°

36°

Output Type

SF

Shallow Height, Full Output

\*\*\*contact Lucent for availability

Driver Options:

Protocol

S

A

P

D

B

Non-Dim

Analogue (0-10v)

Phase

DALI

Bluetooth\*\*

Emergency Options:

Emergency

E

ED

ES

Maintained 3hr Emergency

Maintained 3hr DALI Self Test

Maintained 3hr Self Test

Finish selection




Antique Brass



Antique Bronze



Polished Brass




Polished Nickel



Polished Chrome

Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

- Louvre/Lens
- LS45

LSDF

LSFR

LSLS

LSHS
- Honeycomb Louvre

Diffusing Lens

Frosted Lens

Linear Spread Lens

Heavy Spread Lens

Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.