
QUANTUM Module

ProSpex MicroTrim Accent

TM65.2	7kgCO2e
TM66	2.4 CEAM



70mm (2.76”) overall diameter. Available with standard trim kit. Family of matching products also available.

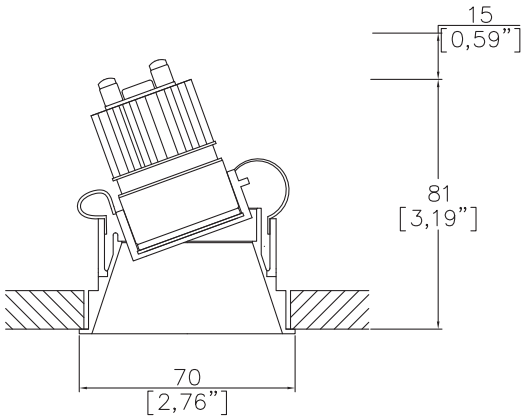

MT70210-TR1
Cut out Ø65mm
Required depth height + 15mm^

LED Source	LED35/Q-HE-SF	LED35/Q-HE-SF	LED35/Q-HE-SF	LED35/Q-HE-SF
CCT	3000K	3000K	3000K	3000K
Drive Current	150mA	150mA	150mA	150mA
Power inc Driver	5.5W	5.5W	5.5W	5.5W
Beam Angle	NF (18°)	MF (24°)	FL (34°)	WFL (55°)
Delivered Lumens	606	597	636	586
Delivered Intensisty cd	4050	2938	1767	772
Efficacy lm/w	110	108	115	106
Forward Volt	33V	33V	33V	33V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI

L1 ≥75 Dwellings Compliant

L2 ≥95 General Compliant

L2 ≥80 Display Compliant

Apply these factors to 3000K for lumen output of other CCTs: **2700K** x 0.98 / **4000K** x 1.02.

Copyright © 2026 Lucent Lighting Ltd.

Project Ref:_____ Location Ref:_____

Fixture Order Code:

MT70210 – TR1 – [ ] – [ ] – 0

Fixture
MT70210 MicroTrim Accent with LED35

Installation
TR1 Trim for Existing Ceilings

Finish
WH02 Textured Matt White RAL 9010
BK02 Textured Matt Black RAL 9005
RAL* Custom RAL Colour*
ABR1 Antique Brass
ABZ1 Antique Bronze
PCH1 Polished Chrome
PNK1 Polished Nickel
PBR1 Polished Brass

IP Rating
54 IP54
65 IP65

Fire Rating
0 No Fire Rating

Module Order Code:

LED35/Q-HE – [ ] – [ ] – SF

LED
LED35/Q-HE LED35 QUANTUM High Efficacy

CCT
27 2700K
30 3000K
40 (1) 4000K

Beam
NF Narrow Flood
MF Medium Flood
FL Flood
WFL Wide Flood

Output Type
SF Shallow Height, Full Output

(1) contact Lucent for availability

Driver Options:

[ ]

Protocol
S Non-Dim
A Analogue (0-10v)
P Phase
D DALI
B Bluetooth**

Emergency Options:

[ ]

Emergency
E Maintained 3hr Emergency
ED Maintained 3hr DALI Self Test
ES Maintained 3hr Self Test

Copyright © 2026 Lucent Lighting Ltd.

Finish selection




Antique Brass



Antique Bronze



Polished Brass



Polished Nickel




Polished Chrome

Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

Louvre/Lens
LS45 Honeycomb Louvre
LSDF Diffusing Lens
LSFR Frosted Lens
LSLS Linear Spread Lens
LSHS Heavy Spread Lens

Copyright © 2026 Lucent Lighting Ltd.

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE