





Oculus Accent Trim

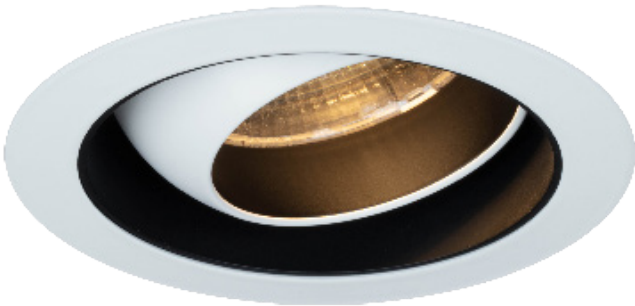

Ø65mm (2.56”) adjustable downlight with eyeball mechanism, offering 30° adjustment in all directions. Available with a standard trim kit or 3 flush trim options, depending on ceiling type and finish.

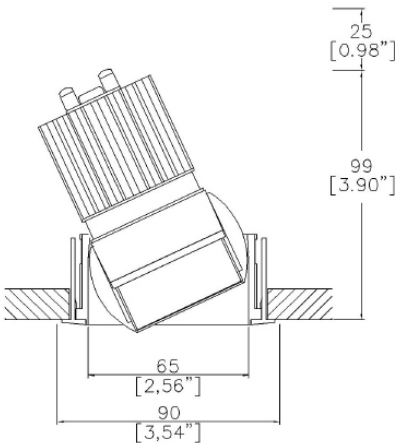

Oculus with Trim Kit TR1 ⁽¹⁾
Cut-out Ø3.22” (Ø82mm).

LED Source	ALED51/Q-HE	ALED51/Q-HE	ALED51/Q-HE	ALED51/Q-HE
CCT	3000K	3000K	3000K	3000K
Drive Current	200mA	200mA	200mA	200mA
Power inc Driver	8.0W	8.0W	8.0W	8.0W
Beam Angle	NF (16°)	MF (22°)	FL (34°)	WFL (53°)
Delivered Lumens	940	1053	1036	894
Delivered Intensisty cd	7366	6077	3000	1307
Delivered Lumens per circuit watt	130	132	130	112
Forward Volt	33V	33V	33V	33V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI

Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 4000K x 1.02.

Driver box is for remote installation only - cannot be installed through cutout

Project Ref: _____ Location Ref: _____

Specify fixture part number (All boxes must be filled in to correctly order)

AOC010	TR1					0	ALED51/Q-HE		
--------	-----	--	--	--	--	---	-------------	--	--

Installation ☐

TR1 Trim for existing ceilings (0.20"-0.98" total thickness)

Oculus Finish

WH02 White RAL9010

BK02 Black RAL9005

RAL Custom*

ABR1 Antique Brass

ABZ1 Antique Bronze

PCH1 Polished Chrome

PNK1 Polished Nickel

PBR1 Polished Brass

Internal Finish

WH02 White RAL9010

BK02 Black RAL9005

RAL Custom*

ABR1 Antique Brass

ABZ1 Antique Bronze

Trim Finish

WH02 White RAL9010

BK02 Black RAL9005

RAL Custom*

ABR1 Antique Brass

ABZ1 Antique Bronze

PCH1 Polished Chrome

PNK1 Polished Nickel

PBR1 Polished Brass

Location

DP Damp

WT Wet

LED Type

ALED51/Q-HE LED50 ONE Quantum High Efficiency

CCT

27 2700K

30 3000K

35 3500K (1)

40 4000K (1)

(1) contact Lucent for availability


Beam Angles

NF Narrow Flood

MF Medium Flood

FL Flood

WFL Wide Flood



NIC - No contact with insulation

Driver box is for remote installation only - cannot be installed through cutout

Project Ref: _____ Location Ref: _____

Specify fixture part number (All boxes must be filled in to correctly order)

ALEZ1-120-277

EasyFit
ALEZ1-120-277 Lucent EasyFit 120-277V

Dimming Protocol

SLA

EldoLED Analog (0-10V) (0.1% Dimming)

ECA

EldoLED Analog (0-10V) (1% Dimming)

SLD

EldoLED DALI (0.1% Dimming)

ECD

EldoLED DALI (1% Dimming)

PTB15

ERP PTB 0-10V/Phase (1% Dimming) (PHASE ONLY 120V)

FTX15

Hatch Foundation 0-10V/Phase (1% Dimming)

Contact Lucent factory for Lutron LED Driver options

Louvre/Lens

XX

Not required

LL45

Honeycomb

LLDF

Solite/Diffusing

LLFR


Frosted Lens

LLLS

Linear Spread

LLHS


Heavy Spread



NIC - No contact with insulation

Driver box is for remote installation only - cannot be installed through cutout

EasyFit remote driver box

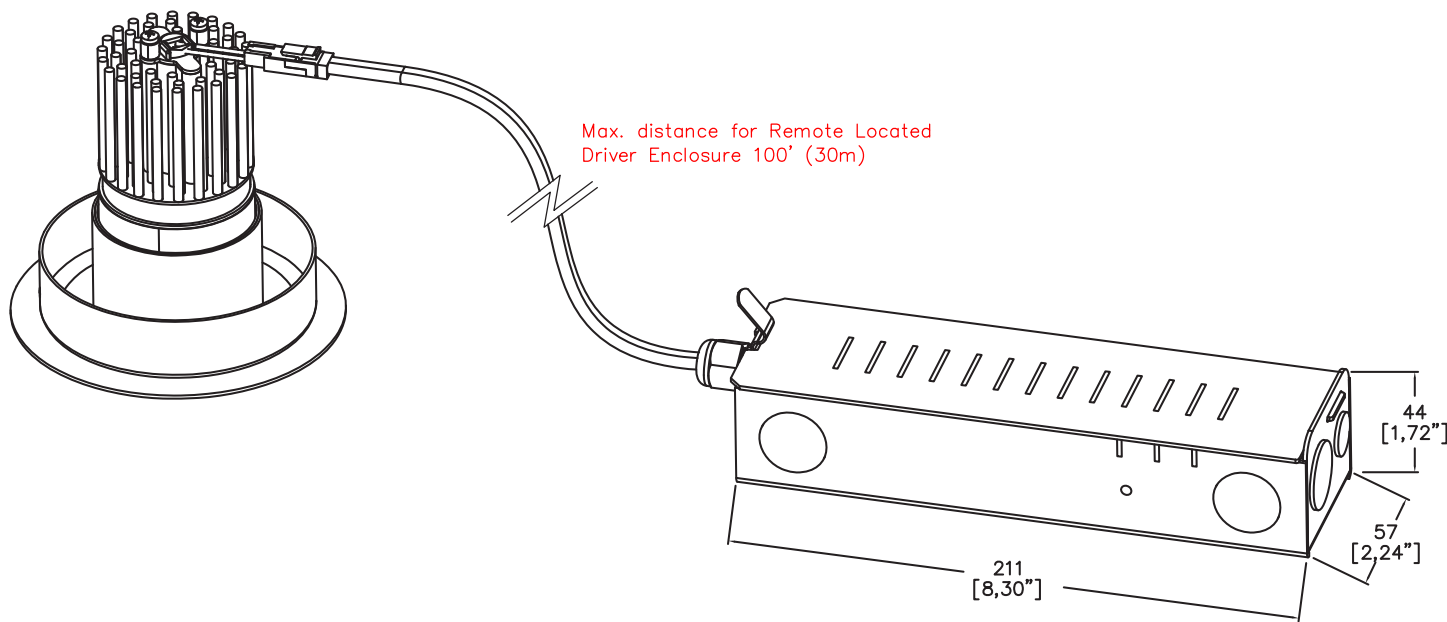

Max distance and wire gauge required (4)

100' (30m) with AWG 16

(4) We recommend the distance and wire gauge is approved by a certified electrical engineer.

Installation Kits



Trim Kit for Existing Ceilings

Driver box is for remote installation only - cannot be installed through cutout

Finish selection




Antique Brass



Antique Bronze



Polished Brass




Polished Nickel




Polished Chrome

Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

^ Depth indicated is the minimum recess depth for the driver to be installed through the luminaire cut out.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

Location. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

