

Light efficiency:


65 Lumen/Watt

Light quality:

CRI: 92.3

Color temperature:

3000 K

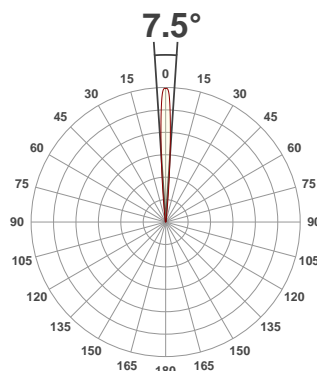

Product name:

Soft 70 Accent - LED51 Super Spot, 3000K, 7°, 500mA


Item number:

073-LED51SS-30-7-500mA


Delivered information for above fixture and LED combination.

Output: 436 Lumen Peak intensity: 17495 cd Power consumption: 6.7


CRI R values

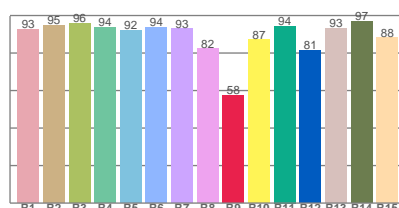

TM30 C Values

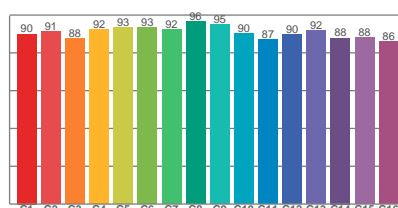


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	92.3	57.5	90.8	100.4	90.6	0.437	0.404	0.248	0.347	0.0004

Beam details

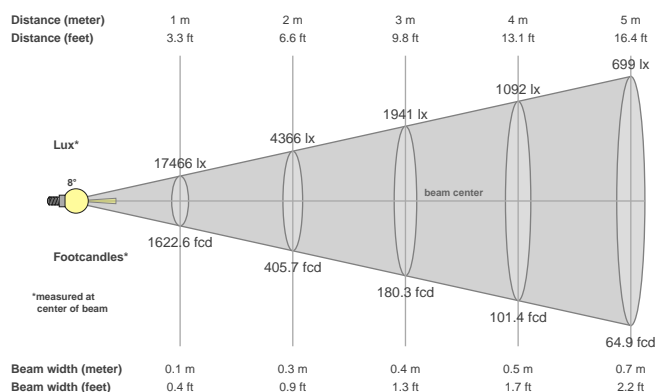

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
7.5°	13.2°	20.5°

Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
17495 cd	99.8%	99.6%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
17466lx	4366lx	1941lx	1092lx	699lx	485lx	356lx	273lx	216lx	175lx	144lx	121lx	103lx	89lx	78lx	68lx	60lx	54lx	48lx	44lx
1622.6fcd	405.7fcd	180.3fcd	101.4fcd	64.9fcd	45.1fcd	33.1fcd	25.4fcd	20fcd	16.2fcd	13.4fcd	11.3fcd	9.6fcd	8.3fcd	7.2fcd	6.3fcd	5.6fcd	5fcd	4.5fcd	4.1fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 0.9

4000K = 1.08