



ProSpex Focus90 Accent




90mm (3.54”) overall diameter. Available with standard trim kit. Family of matching products also available. Required depth height + 25mm^

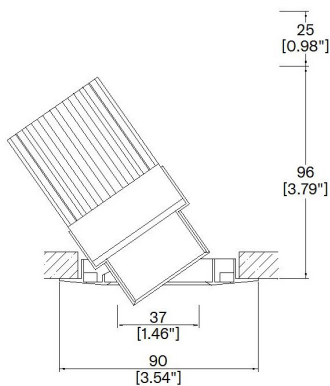

093-LED
Up to 25° tilt
Cut-out 73mm Ø

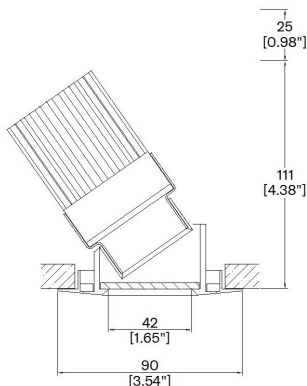

093-LED-54
Up to 25° tilt
Cut-out 73mm Ø

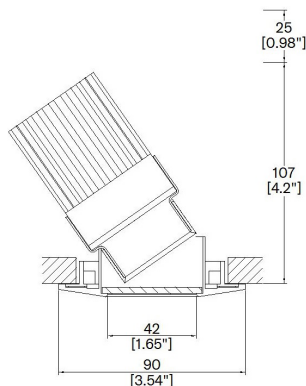

093-LED-65
Up to 30° tilt
Cut-out 73mm Ø

| | | | | |
|-------------------------|---------|---------|---------|---------|
| LED Source | LED51/2 | LED51/2 | LED51/2 | LED51/2 |
| CCT | 3000K | 3000K | 3000K | 3000K |
| Drive Current | 350mA | 350mA | 350mA | 350mA |
| Power inc Driver | 13.6W | 13.6W | 13.6W | 13.6W |
| Beam Angle | 12° | 24° | 38° | 55° |
| Delivered Lumens | 683 | 701 | 845 | 880 |
| Delivered Intensisty cd | 7613 | 4170 | 2393 | 1356 |
| Efficacy lm/w | 50 | 52 | 62 | 65 |
| Forward Volt | 36V | 36V | 36V | 33V |
| CRI | ≥90 CRI | ≥90 CRI | ≥90 CRI | ≥90 CRI |

Project Ref: _____

Location Ref: _____

Fixture Order Code:

093-LED

 - - -

Fixture

093-LED

Focus90 Accent with LED51

IP Rating

54

65

IP54

IP65

Finish

WH

BK

RAL

White

Black

Custom RAL Colour*

Emergency

E

ED

ES

Maintained 3hr Emergency

Maintained 3hr DALI Self Test

Maintained 3hr Self Test



LED Order Code:

LED51/2

 - - -

LED

LED51/2

LED50 ONE GEN2

CCT

927

930

940

90 CRI 2700K

90 CRI 3000K

90 CRI 4000K

Beam

12

24

38

55

12°

24°

38°

55°

Protocol

S

A

P

D

B

Non-Dim

Analogue (0-10v)

Phase

DALI

Bluetooth**



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens



Warm Tone

Accessories Order Code:

Louvre/Lens

- LL45 Honeycomb Louvre
- LLCC Warm Tone Lens
- LLUV UV Lens
- LLDF Diffusing Lens
- LLFR Frosted Lens
- LLLS Linear Spread Lens
- LLHS Heavy Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

Light efficiency:


50 Lumen/Watt

Light quality:

CRI: 92.5

Color temperature:

3000 K

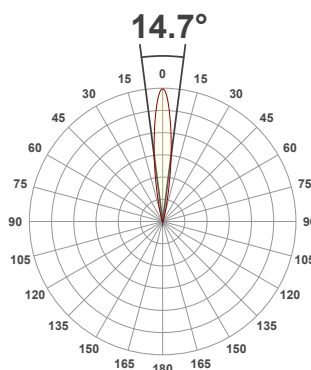

Product name:

**Focus 60_90_Multi - LED50
ONE GEN2, 3000K, 12°, 350mA**


Item number:

**Focus 60_90_Multi -
LED51/2-30-12-350mA**


**Delivered information for above
fixture and LED combination.**

Output: 683 Lumen Peak intensity: 7613 cd Power consumption: 13.6


CRI R values

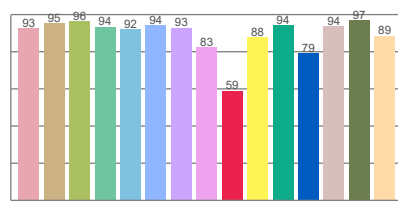

TM30 C Values

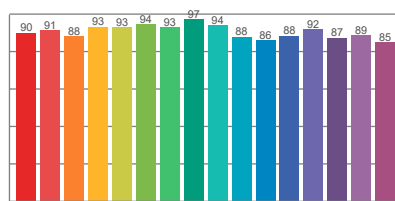


Color vector graphics



| Color temperature | Color rendering index | Red component | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|---------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | x | y | u | v | Δuv |
| 3000 K | 92.5 | 59.0 | 90.7 | 99.8 | 90.7 | 0.437 | 0.404 | 0.250 | 0.348 | 0.0003 |

Beam details

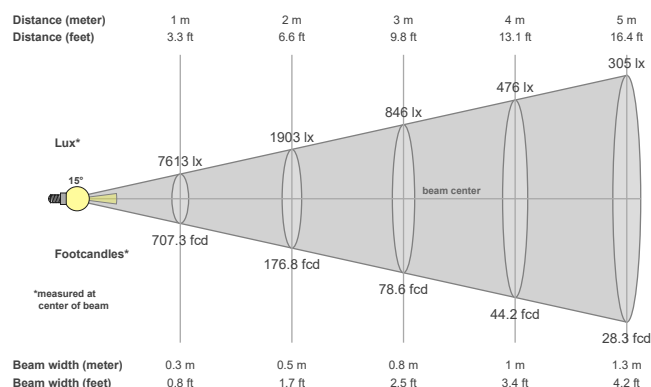

Beam angles

| Beam angle 50% | Field angle 10% | Cutoff angle 2,5% |
|----------------|-----------------|-------------------|
| 14.7° | 27.8° | 42.3° |

Beam intensities

| Peak intensity | Int. ratio in 120° cone | Int. ratio in 90° cone |
|----------------|-------------------------|------------------------|
| 7613 cd | 99.6% | 99.0% |

Beam intensities from 1-20m

| 1m | 2m | 3m | 4m | 5m | 6m | 7m | 8m | 9m | 10m | 11m | 12m | 13m | 14m | 15m | 16m | 17m | 18m | 19m | 20m |
|----------|----------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 3.3ft | 6.6ft | 9.8ft | 13.1ft | 16.4ft | 19.7ft | 23ft | 26.2ft | 29.5ft | 32.8ft | 36.1ft | 39.4ft | 42.7ft | 45.9ft | 49.2ft | 52.5ft | 55.8ft | 59.1ft | 62.3ft | 65.6ft |
| 7613lx | 1903lx | 846lx | 476lx | 305lx | 211lx | 155lx | 119lx | 94lx | 76lx | 63lx | 53lx | 45lx | 39lx | 34lx | 30lx | 26lx | 23lx | 21lx | 19lx |
| 707.3fcd | 176.8fcd | 78.6fcd | 44.2fcd | 28.3fcd | 19.6fcd | 14.4fcd | 11.1fcd | 8.7fcd | 7.1fcd | 5.8fcd | 4.9fcd | 4.2fcd | 3.6fcd | 3.1fcd | 2.8fcd | 2.4fcd | 2.2fcd | 2fcd | 1.8fcd |

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1

4000K = 1.084

Light efficiency:


52 Lumen/Watt

Light quality:

CRI: 92.4

Color temperature:

3000 K

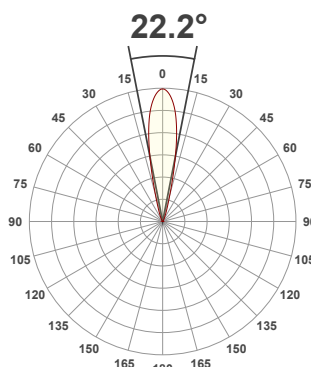

Product name:

**Focus 60_90_Multi - LED50
ONE GEN2, 3000K, 24°, 350mA**


Item number:

**Focus 60_90_Multi -
LED51/2-30-24-350mA**


**Delivered information for above
fixture and LED combination.**

Output: 701 Lumen Peak intensity: 4170 cd Power consumption: 13.6


CRI R values

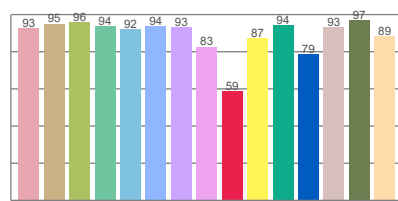

TM30 C Values

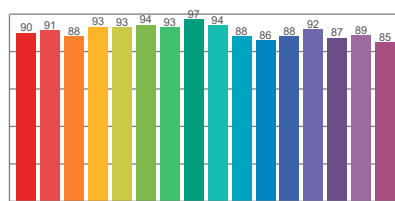


Color vector graphics



| Color temperature | Color rendering index | Red component | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|---------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | x | y | u | v | Δuv |
| 3000 K | 92.4 | 59.0 | 90.6 | 99.9 | 90.7 | 0.437 | 0.404 | 0.250 | 0.348 | 0.0005 |

Beam details

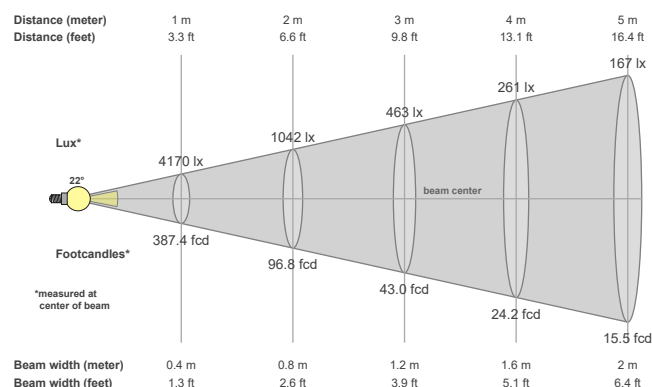

Beam angles

| Beam angle 50% | Field angle 10% | Cutoff angle 2,5% |
|----------------|-----------------|-------------------|
| 22.2° | 37.4° | 55° |

Beam intensities

| Peak intensity | Int. ratio in 120° cone | Int. ratio in 90° cone |
|----------------|-------------------------|------------------------|
| 4170 cd | 99.8% | 99.0% |

Beam intensities from 1-20m

| 1m | 2m | 3m | 4m | 5m | 6m | 7m | 8m | 9m | 10m | 11m | 12m | 13m | 14m | 15m | 16m | 17m | 18m | 19m | 20m |
|----------|---------|-------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 3.3ft | 6.6ft | 9.8ft | 13.1ft | 16.4ft | 19.7ft | 23ft | 26.2ft | 29.5ft | 32.8ft | 36.1ft | 39.4ft | 42.7ft | 45.9ft | 49.2ft | 52.5ft | 55.8ft | 59.1ft | 62.3ft | 65.6ft |
| 4170lx | 1042lx | 463lx | 261lx | 167lx | 116lx | 85lx | 65lx | 51lx | 42lx | 34lx | 29lx | 25lx | 21lx | 19lx | 16lx | 14lx | 13lx | 12lx | 10lx |
| 387.4fcd | 96.8fcd | 43fcd | 24.2fcd | 15.5fcd | 10.8fcd | 7.9fcd | 6.1fcd | 4.8fcd | 3.9fcd | 3.2fcd | 2.7fcd | 2.3fcd | 2fcd | 1.7fcd | 1.5fcd | 1.3fcd | 1.2fcd | 1.1fcd | 1fcd |

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1

4000K = 1.084

Light efficiency:


62 Lumen/Watt

Light quality:

CRI: 92.4

Color temperature:

3000 K

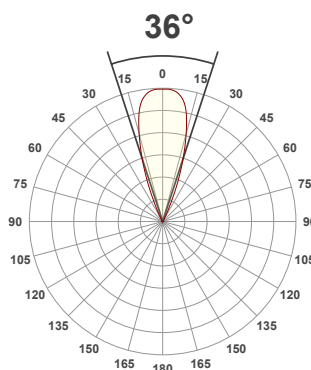

Product name:

**Focus 60_90_Multi - LED50
ONE GEN2, 3000K, 38°, 350mA**


Item number:

**Focus 60_90_Multi -
LED51/2-30-38-350mA**


**Delivered information for above
fixture and LED combination.**

Output: 845 Lumen Peak intensity: 2393 cd Power consumption: 13.6


CRI R values

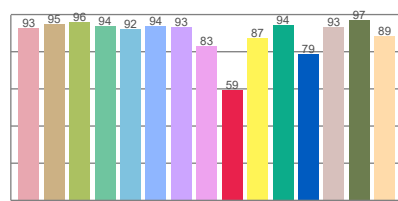

TM30 C Values

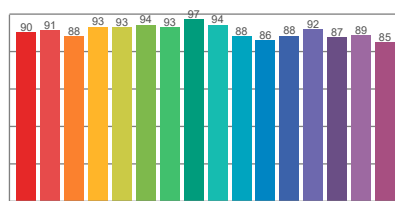


Color vector graphics



| Color temperature | Color rendering index | Red component | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|---------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | x | y | u | v | Δuv |
| 3000 K | 92.4 | 59.3 | 90.7 | 99.9 | 90.8 | 0.437 | 0.404 | 0.249 | 0.348 | 0.0006 |

Beam details

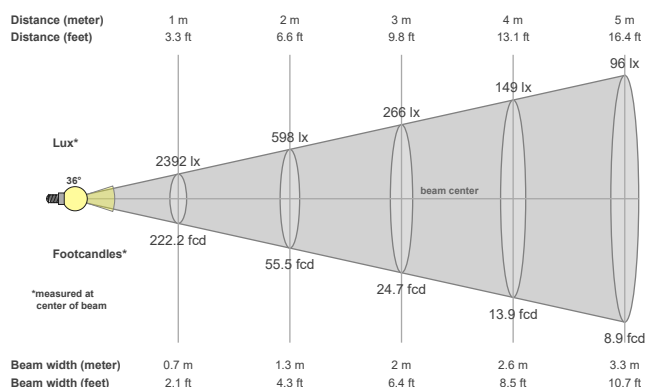

Beam angles

| Beam angle 50% | Field angle 10% | Cutoff angle 2,5% |
|----------------|-----------------|-------------------|
| 36° | 50.9° | 62.4° |

Beam intensities

| Peak intensity | Int. ratio in 120° cone | Int. ratio in 90° cone |
|----------------|-------------------------|------------------------|
| 2393 cd | 99.7% | 99.0% |

Beam intensities from 1-20m

| 1m | 2m | 3m | 4m | 5m | 6m | 7m | 8m | 9m | 10m | 11m | 12m | 13m | 14m | 15m | 16m | 17m | 18m | 19m | 20m |
|----------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 3.3ft | 6.6ft | 9.8ft | 13.1ft | 16.4ft | 19.7ft | 23ft | 26.2ft | 29.5ft | 32.8ft | 36.1ft | 39.4ft | 42.7ft | 45.9ft | 49.2ft | 52.5ft | 55.8ft | 59.1ft | 62.3ft | 65.6ft |
| 2392lx | 598lx | 266lx | 149lx | 96lx | 66lx | 49lx | 37lx | 30lx | 24lx | 20lx | 17lx | 14lx | 12lx | 11lx | 9lx | 8lx | 7lx | 7lx | 6lx |
| 222.2fcd | 55.5fcd | 24.7fcd | 13.9fcd | 8.9fcd | 6.2fcd | 4.5fcd | 3.5fcd | 2.7fcd | 2.2fcd | 1.8fcd | 1.5fcd | 1.3fcd | 1.1fcd | 1fcd | 0.9fcd | 0.8fcd | 0.7fcd | 0.6fcd | 0.6fcd |

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1

4000K = 1.084

Light efficiency:

65 Lumen/Watt


Light quality:

CRI: 92.3

Color temperature:

3068 K

49.9°



Product name:

Focus 60_90_Multi - LED50 ONE GEN2, 3000K, 55°, 350mA


Item number:

Focus 60_90_Multi - LED51/2-30-55-350mA


Delivered information for above fixture and LED combination.

Output: 880 Lumen Peak intensity: 1356 cd Power consumption: 13.6


CRI R values

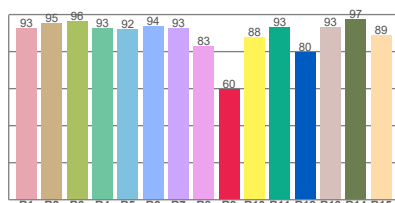

TM30 C Values

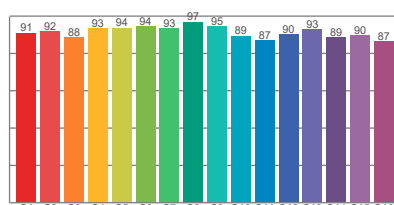


Color vector graphics



| Color temperature | Color rendering index | Red component | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|---------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | x | y | u | v | Δuv |
| 3068 K | 92.3 | 59.6 | 91.4 | 100.3 | 90.3 | 0.432 | 0.401 | 0.249 | 0.346 | -0.0006 |

Beam details

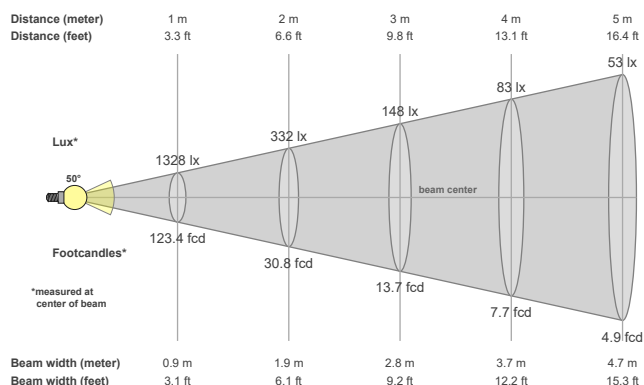

Beam angels

| Beam angle 50% | Field angle 10% | Cutoff angle 2,5% |
|----------------|-----------------|-------------------|
| 49.9° | 67.2° | 84° |

Beam intensities

| Peak intensity | Int. ratio in 120° cone | Int. ratio in 90° cone |
|----------------|-------------------------|------------------------|
| 1356 cd | 99.7% | 98.6% |

Beam intensities from 1-20m

| 1m | 2m | 3m | 4m | 5m | 6m | 7m | 8m | 9m | 10m | 11m | 12m | 13m | 14m | 15m | 16m | 17m | 18m | 19m | 20m |
|----------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 3.3ft | 6.6ft | 9.8ft | 13.1ft | 16.4ft | 19.7ft | 23ft | 26.2ft | 29.5ft | 32.8ft | 36.1ft | 39.4ft | 42.7ft | 45.9ft | 49.2ft | 52.5ft | 55.8ft | 59.1ft | 62.3ft | 65.6ft |
| 1328lx | 332lx | 148lx | 83lx | 53lx | 37lx | 27lx | 21lx | 16lx | 13lx | 11lx | 9lx | 8lx | 7lx | 6lx | 5lx | 5lx | 4lx | 4lx | 3lx |
| 123.4fcd | 30.8fcd | 13.7fcd | 7.7fcd | 4.9fcd | 3.4fcd | 2.5fcd | 1.9fcd | 1.5fcd | 1.2fcd | 1fcd | 0.9fcd | 0.7fcd | 0.6fcd | 0.5fcd | 0.5fcd | 0.4fcd | 0.4fcd | 0.3fcd | 0.3fcd |

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1

4000K = 1.084