

## Light efficiency:


**58 Lumen/Watt**

## Light quality:

**CRI: 91.7**

## Color temperature:

**3000 K**

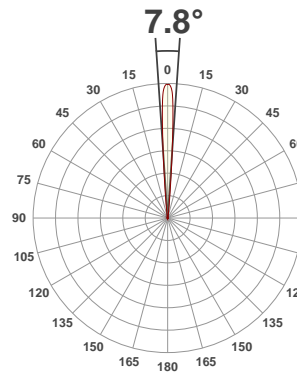

## Product name:

**Axis Mini2 Long Snoot -**

**LED51 SuperSpot, 3000K, 7°, 500mA**


## Item number:

**200/2-LS-LED51SS-30-7-500mA**


**Delivered information for above fixture and LED combination.**

**Output: 392 Lumen Peak intensity: 15791 cd Power consumption: 6.7**


## CRI R values

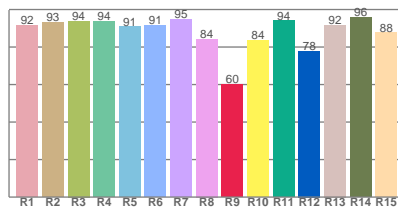

## TM30 C Values

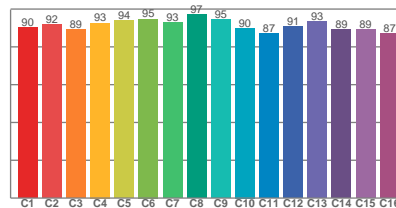


## Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	91.7	60.1	91.4	99.7	91.2	0.437	0.404	0.246	0.349	0.0031

## Beam details

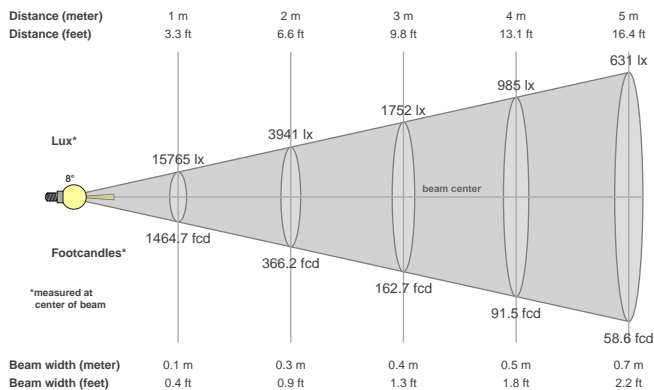

## Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
7.8°	12.9°	21.1°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
15791 cd	99.5%	99.2%

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
15765lx	3941lx	1752lx	985lx	631lx	438lx	322lx	246lx	195lx	158lx	130lx	109lx	93lx	80lx	70lx	62lx	55lx	49lx	44lx	39lx
1464.7fcd	366.2fcd	162.7fcd	91.5fcd	58.6fcd	40.7fcd	29.9fcd	22.9fcd	18.1fcd	14.6fcd	12.1fcd	10.2fcd	8.7fcd	7.5fcd	6.5fcd	5.7fcd	5.1fcd	4.5fcd	4.1fcd	3.7fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 0.9

4000K = 1.08