


Axis3.5 Long Snoot




Axis provides high performance electronics and architectural aesthetics in 3.5” and 5” trim with a n option of tapered or straight snoots. Axis products come as standard adjustable in a flanged or trimless installation kit. Tray, retrofit and housing installation methods (NIC, IC, AT, T24 and CCEA) Multiple configurations for equal spacing also available. Lu-cent modules available in a wide range of color temperatures, beam angles, intensities, and effects (Ambiance Warm-Dim and Dynamic Tuneable White). MR16 and GU10 LED lamp options available. TRIAC/Phase, 0-10v/1-10v, DMX and DALI/Digital dimming.

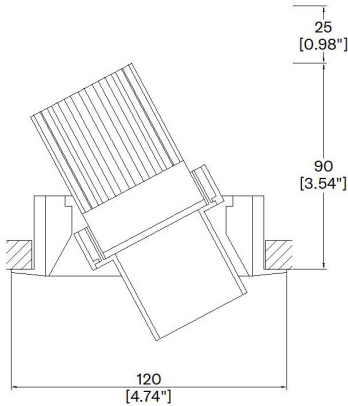

A200/2-LS-LED-TR  
Up to 35° tilt  
Cut-out 108mm (4.25”) Ø



Installation kit for overlap flange

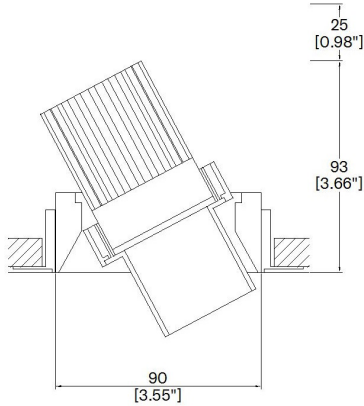

A200/2-LS-LED-TL  
Up to 35° tilt  
Cut-out 106mm (4.17”) Ø



Mud-in kit for seamless/trimless

LED Source	LED51TW	LED51TW
CCT (5000K - 2000K)	@ 3000K	@ 3000K
Drive Current (max per channel)	700mA	700mA
Power inc Driver	15.1W	15.1W
Beam Angle	25°	35°
Delivered Lumens	444	491
Delivered Intensisty cd	2111	1315
Efficacy lm/w	29	33
Forward Volt (max per channel)	18.4V	18.4V
CRI	≥95 CRI	≥95 CRI

Project Ref: \_\_\_\_\_ Location Ref: \_\_\_\_\_

Specify fixture part number (All boxes must be filled in to correctly order)

<b>A200/2-LS-LED</b>				<b>LED5ITW</b>	<b>5020</b>								
----------------------	--	--	--	----------------	-------------	--	--	--	--	--	--	--	--

Installation

**TR** Flange kit

**TL** Mud-in kit

Finish

**WH** White

**BK** Black

**RAL** Custom\*

Ceiling Thickness

**SC** Standard Ceiling (1/2"-5/8"-3/4")

**C** Custom

LED Type

**LED5ITW** LED5ITW (95CRI)

CCT

**5020** 5000K - 2000K

Beam Angles

**25** 25

**35** 35

Housing/Tray

**LMT-13-NIC** Mounting Tray Non-Insulated ceilings

**LH-6.75-NIC** Housing 6.75" Non-Insulated ceilings

**LH-8.50-AT/IC** Housing 8.50" Insulated/Air-tight ceilings and Chicago Plenum

Mounting Hardware

**09** 9" to 15.25" - Adjustable Bar Hanger Lengths

**14** 14" to 24" - Adjustable Bar Hanger Lengths

**36** 28" to 36" - Adjustable Bar Hanger Lengths

**BB** Butterfly Bracket

**CB** Caterpillar Bracket

Supply Voltage

**120** 120V

**277** 277V

Dimming Protocol

**A2** Analogue (0-10V) 2-Channel (0.1% Dimming)

**D6** DALI Type 6\*\* (0.1% Dimming)

**D8** DALI Type 8\*\* (0.1% Dimming)

**L** Lutron (Consult Factory)

Emergency

**E** 3hr Emergency

**ES** 3hr Self Test

Louvre/Lens

**XX** Not required

**LL45** Honeycomb

**LLCC** Warm Tone

**LLUV** UV

**LLDF** Solite/Diffusing


**LLFR** Frosted Lens

**LLLS** Linear Spread


**LLHS** Heavy Spread

\*Refer to Technical Details for more information

Housing dimensions

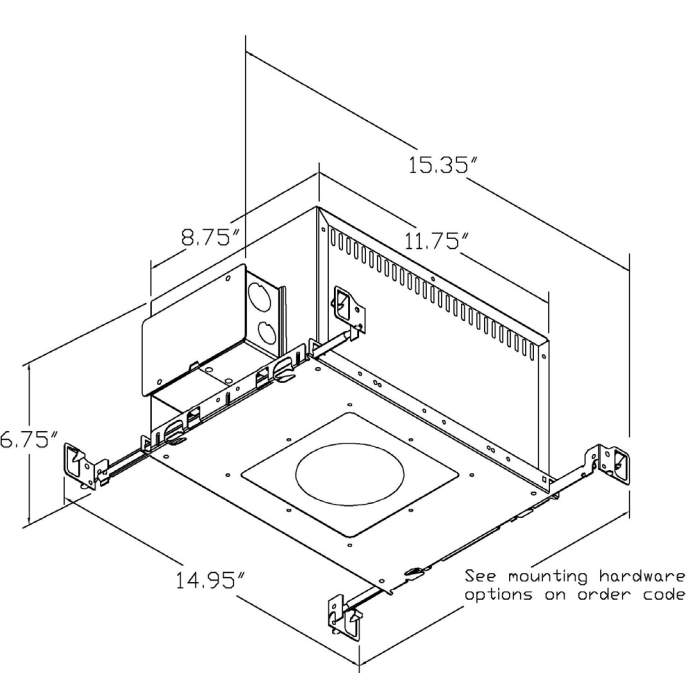


LH-6.75  
Non-insulated ceilings

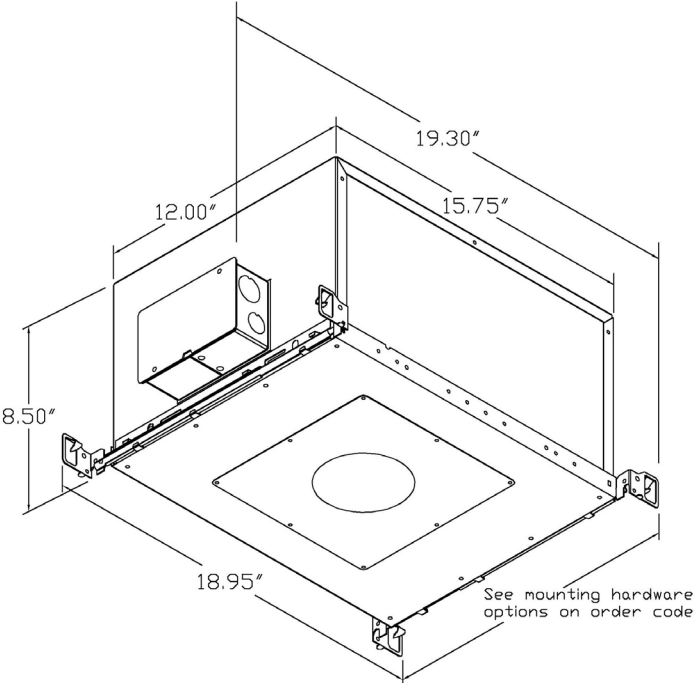


LH-8.50  
Insulated/air-tight ceilings and  
Chicago Plenum


Tray dimensions

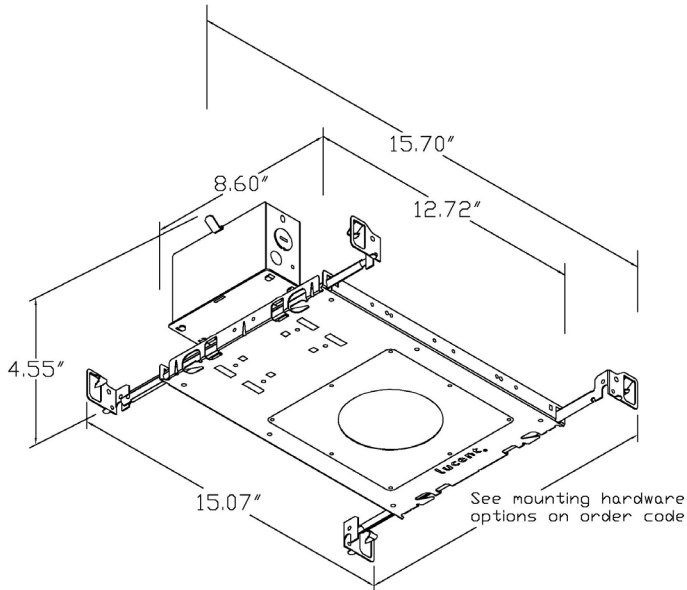

LMT-13  
Non-insulated ceilings




**Honeycomb Louvre (LL45)**



**Solite/Diffusing Lens (LLDF)**



**Frosted Lens (LLFR)**



**Heavy Spread Lens (LLHS)**



**Linear Spread Lens (LLLS)**



**Warm Tone (LLCC)**

Technical Details

\*Custom color requires a paint chip or RAL code and may increase price and lead-time

It is the responsibility of the specifier/integrator/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is a communication protocol. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or Bluetooth devices.

\*\*\*Non specific driver type, dimming performance depending on exact driver used. Contact Lucent Lighting for more information.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant installation instructions prior to purchase.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

Location. Tested from underside of the ceiling.

Data correct at time of publishing. It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting, Incorporated. Lucent Lighting reserves the right to take whatever action is necessary to protect its intellectual property, patents and trademarks

Please notify Lucent Lighting Inc. in accuracies. E&OE



## Light efficiency:


**29 Lumen/Watt**

## Light quality:

**CRI: 91.4**

## Color temperature:

**3000 K**

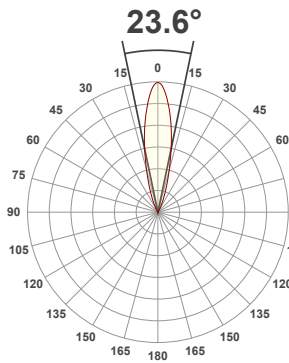

## Product name:

**200-LS-LED - LED51TW-5020-25 @ 3000K**


## Item number:

**Axis Mini Straight Snoot - LED51TW-5020-25 @ 3000K**


**Delivered information for above fixture and LED combination.**

**Output: 444 Lumen Peak intensity: 2111 cd Power consumption: 15.1**


## CRI R values

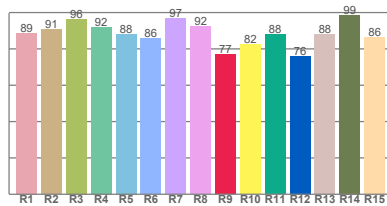

## TM30 C Values

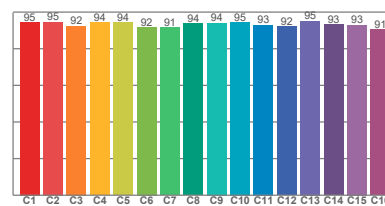


## Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	91.4	77.0	93.5	106.8	93.6	0.437	0.404	0.256	0.335	-0.0133

## Beam details

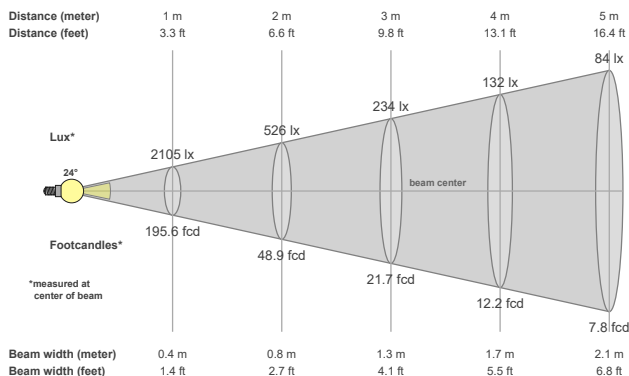

## Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
23.6°	46.1°	59.7°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
2111 cd	99.7%	99.0%

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2105lx	526lx	234lx	132lx	84lx	58lx	43lx	33lx	26lx	21lx	17lx	15lx	12lx	11lx	9lx	8lx	7lx	6lx	6lx	5lx
195.6fcd	48.9fcd	21.7fcd	12.2fcd	7.8fcd	5.4fcd	4fcd	3.1fcd	2.4fcd	2fcd	1.6fcd	1.4fcd	1.2fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd

All the above information for fixtures with LED51TW-5020 modules are tested at 3000K

Factors to adjust lumen output for the following CCTs at 100% output for the colour are as follows:

2000K = 0.67

2700K = 0.84

3500K = 1.085

4000K = 1.113

5000K = 1.087

## Light efficiency:


**33 Lumen/Watt**

## Light quality:

**CRI: 91.4**

## Color temperature:

**3000 K**

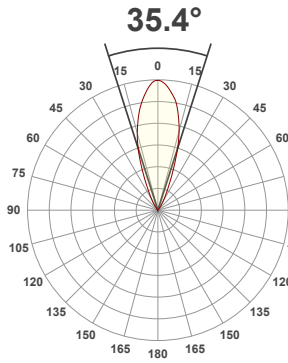

## Product name:

**200-LS-LED - LED51TW-5020-35 @ 3000K**


## Item number:

**Axis Mini Straight Snoot - LED51TW-5020-35 @ 3000K**


**Delivered information for above fixture and LED combination.**

**Output: 491 Lumen Peak intensity: 1315 cd Power consumption: 15.1**


## CRI R values

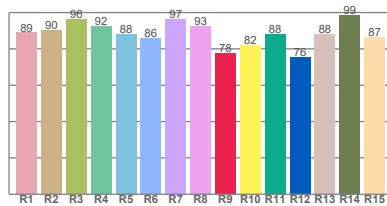

## TM30 C Values

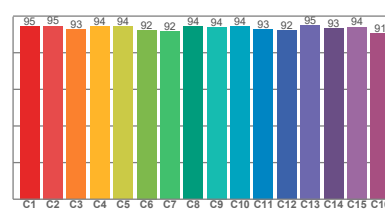


## Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	91.4	77.6	93.6	106.4	93.8	0.437	0.404	0.256	0.336	-0.0130

## Beam details

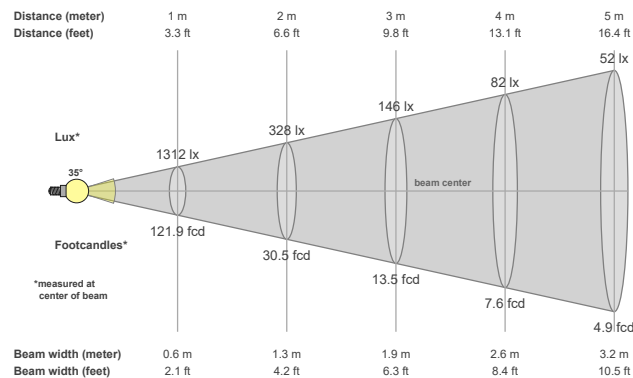

## Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
35.4°	58.7°	73.2°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
1315 cd	99.7%	99.1%

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1312lx	328lx	146lx	82lx	52lx	36lx	27lx	21lx	16lx	13lx	11lx	9lx	8lx	7lx	6lx	5lx	5lx	4lx	4lx	3lx
121.9fcd	30.5fcd	13.5fcd	7.6fcd	4.9fcd	3.4fcd	2.5fcd	1.9fcd	1.5fcd	1.2fcd	1fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd	0.3fcd

All the above information for fixtures with LED51TW-5020 modules are tested at 3000K

Factors to adjust lumen output for the following CCTs at 100% output for the colour are as follows:

2000K = 0.67

2700K = 0.84

3500K = 1.085

4000K = 1.113

5000K = 1.087