


## ProSpex Duo Accent

TM65.2 11kgCO2e

TM66 2.3 CEAM



108mm (4.25") overall diameter. 360° rotation. Up to 35° tilt. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available.

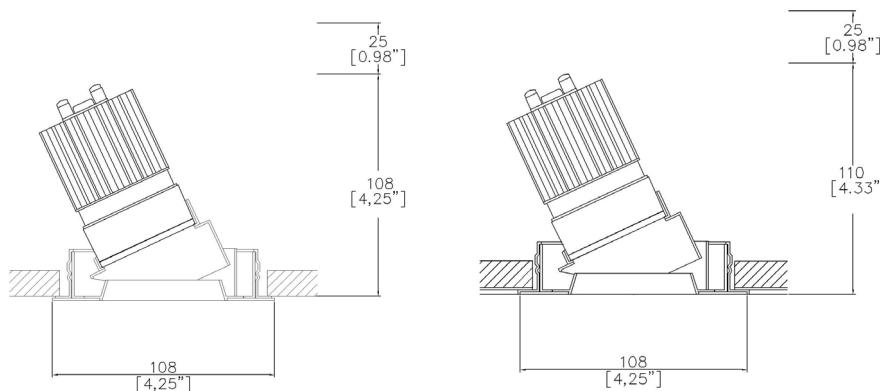

31603-LED + 3000-PBZ  
Cut-out Ø101mm  
Required depth height + 25mm<sup>^</sup>

31603-LED + 3000-PCZ  
Cut-out Ø96mm  
Required depth height + 25mm<sup>^</sup>

LED Source	LED51/3-WD	LED51/3-WD	LED51/3-WD
CCT	2700K/3000K	2700K/3000K	2700K/3000K
Drive Current	350mA	350mA	350mA
Power inc Driver	13.4W	13.4W	13.4W
Beam Angle	NF (20°)	FL (41°)	WFL (56°)
Delivered Lumens	1001	1054	920
Delivered Intensity cd	5878	2150	1084
Delivered Lumens per circuit watt	74	78	68
Forward Volt	34V	34V	34V
CRI	≥90 CRI	≥90 CRI	≥90 CRI

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Fixture Order Code: 31603-LED -   -  Fixture  
31603-LED

Duo Accent with LED51

Finish

WH	White
BK	Black
RAL	Custom RAL Finish*
ABR1	Antique Brass
ABZ1	Antique Bronze
PCH1	Polished Chrome
PNK1	Polished Nickel
PBR1	Polished Brass

IP Rating  
54


IP54

Installation Order Code:  Installation  
3000-PBZ  
3000-PCZTrim kit for trimmed appearance  
Plaster-kit for seamless flush appearanceModule Order Code: LED51/3-WD -   -  LED  
LED51/3-WD

LED50 ONE Gen3 Ambiance WarmDim

CCT  
2718  
30182700K - 1800K  
3000K - 1800KBeam  
NF  
FL  
WFLNarrow Flood  
Flood  
Wide FloodDriver Options:  Protocol  
S  
A  
P  
D  
BNon-Dim  
Analogue (0-10v)  
Phase  
DALI  
Bluetooth\*\*Emergency Options:  Emergency  
E  
ED  
ESMaintained 3hr Emergency  
Maintained 3hr DALI Self Test  
Maintained 3hr Self Test

## Finish selection



Antique Brass



Antique Bronze



Polished Brass




Polished Nickel




Polished Chrome

## Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

Louvre/Lens	_____
LL45	Honeycomb Louvre
LLDF	Diffusing Lens
LLFR	Frosted Lens
LLLS	Linear Spread Lens
LLHS	Heavy Spread Lens

## Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.