



## ProSpex Pinhole90 Accent

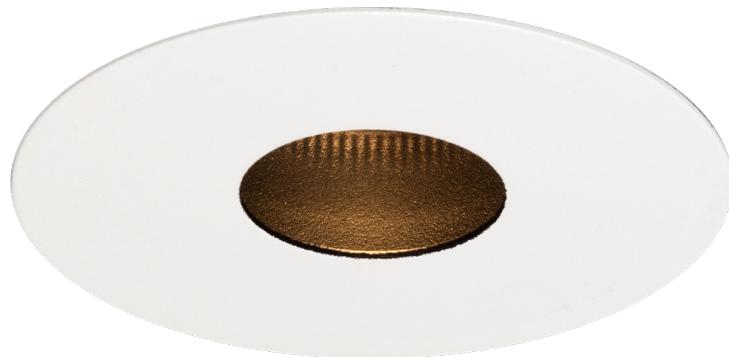

TM65.2 11kgCO2e

TM66 2.3 CEAM

92mm (3.62") overall diameter. 360° Rotation. Up to 30° Tilt. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available.

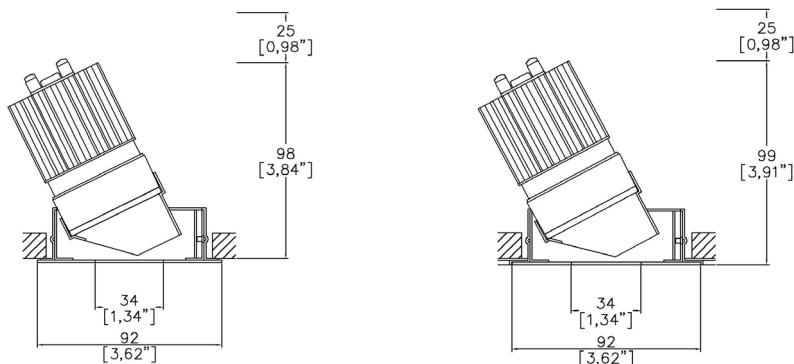

90413-A-LED + 9000-PBZ  
Cut-out Ø83mm  
Required depth height + 25mm<sup>^</sup>

90413-A-LED + 9000-PCZ  
Cut-out Ø83mm  
Required depth height + 25mm<sup>^</sup>


LED Source	LED51/3-WD	LED51/3-WD	LED51/3-WD
CCT	2700K/3000K	2700K/3000K	2700K/3000K
Drive Current	350mA	350mA	350mA
Power inc Driver	13.4W	13.4W	13.4W
Beam Angle	NF (24°)	FL (40°)	WFL (48°)
Delivered Lumens	754	1132	694
Delivered Intensity cd	3755	2147	1011
Delivered Lumens per circuit watt	56	84	51
Forward Volt	34V	34V	34V
CRI	≥90 CRI	≥90 CRI	≥90 CRI

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Fixture Order Code: 90413-A-LED -   -  Fixture  
90413-A-LED      Pinhole90 Accent with LED51Finish  
WH      White RAL 9010  
BK      Black RAL 9005  
RAL\*      Custom RAL Colour\*  
ABR1      Antique Brass  
ABZ1      Antique Bronze  
PCH1      Polished Chrome  
PNK1      Polished Nickel  
PBR1      Polished BrassIP Rating  
54      IP54Installation Order Code:  Installation  
9000-PBZ      Trim kit for trimmed appearance  
9000-PCZ      Plaster-kit for seamless flush appearanceModule Order Code: LED51/3-WD -   -  LED  
LED51/3-WD      LED50 ONE Gen3 Ambiance WarmDimCCT  
2718      2700K - 1800K  
3018      3000K - 1800KBeam  
NF      Narrow Flood  
FL      Flood  
WFL      Wide FloodDriver Options:  Protocol  
S      Non-Dim  
A      Analogue (0-10v)  
P      Phase  
D      DALI  
B      Bluetooth\*\*Emergency Options:  Emergency  
E      Maintained 3hr Emergency  
ED      Maintained 3hr DALI Self Test  
ES      Maintained 3hr Self Test

## Finish selection



Antique Brass



Antique Bronze



Polished Brass




Polished Nickel




Polished Chrome

## Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

Louvre/Lens	_____
LL45	Honeycomb Louvre
LLDF	Diffusing Lens
LLFR	Frosted Lens
LLLS	Linear Spread Lens
LLHS	Heavy Spread Lens

## Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.