




# ProSpex Edge4.25 Fixed

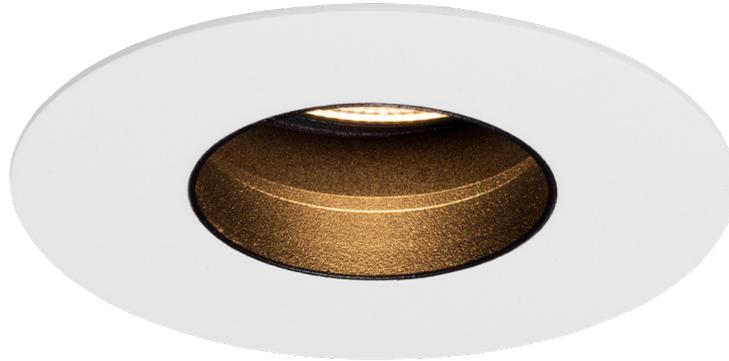

108mm (4.25") overall diameter. Edge baffle to ensure aperture is glare free and for a professional look. Available with standard trim kit or mud-in kit for flush appearance. Family of matching products also available. Required depth height + 25mm^

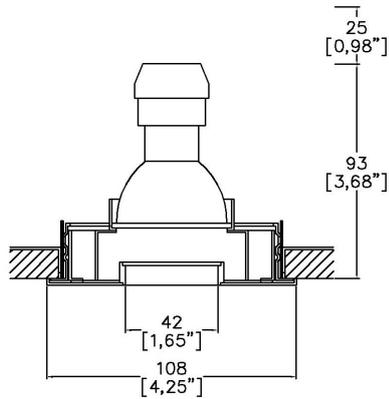

A31413-F-GU + 3000-PBZ  
Cut-out 103mm (4.00") Ø

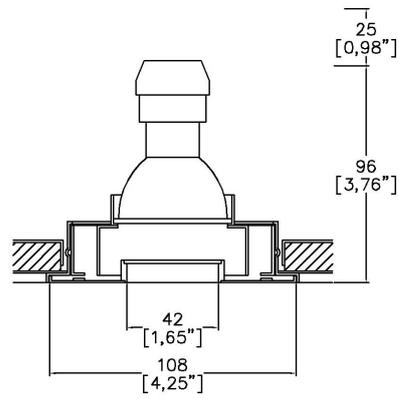

A31413-F-GU + 3000-PCZ  
Cut-out 98mm (3.85") Ø

Light Source	GU10 Halogen GU10 LED
Max Power	50W (Halogen)
Lamp Base	GU10
Voltage	120v 50/60Hz
Insulation Class	I

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

Fixture Order Code:  -  -  -

Fixture  
A31413-F-GU      Edge4.25 Fixed with GU10

Finish  
WH      White (RAL 9010)  
BK      Black (RAL 9005)  
RAL      Custom RAL Colour\*


Ceiling Thickness  
12      1/2"  
58      5/8"  
75      3/4"  
C      Custom

Location  
DP      Damp  
WT      Wet  
XX      Standard Location

Installation Order Code:

Installation  
3000-PBZ      Trim kit for trimmed appearance  
3000-PCZ      Mud-kit for seamless flush appearance





Honeycomb Louvre (LL45)



Solite/Diffusing Lens (LLDF)



Frosted Lens (LLFR)



Heavy Spread Lens (LLHS)



Linear Spread Lens (LLLS)



Warm Tone (LLCC)

Accessories Order Code:

Louvre/Lens

- LL45 Honeycomb Louvre
- LLCC Warm Tone Lens
- LLUV UV Lens
- LLDF Solite/Diffusing Lens
- LLFR Frosted Lens
- LLLS Linear Spread Lens
- LLHS Heavy Spread Lens

Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated may vary depending on lamp type used

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.


We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE



Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

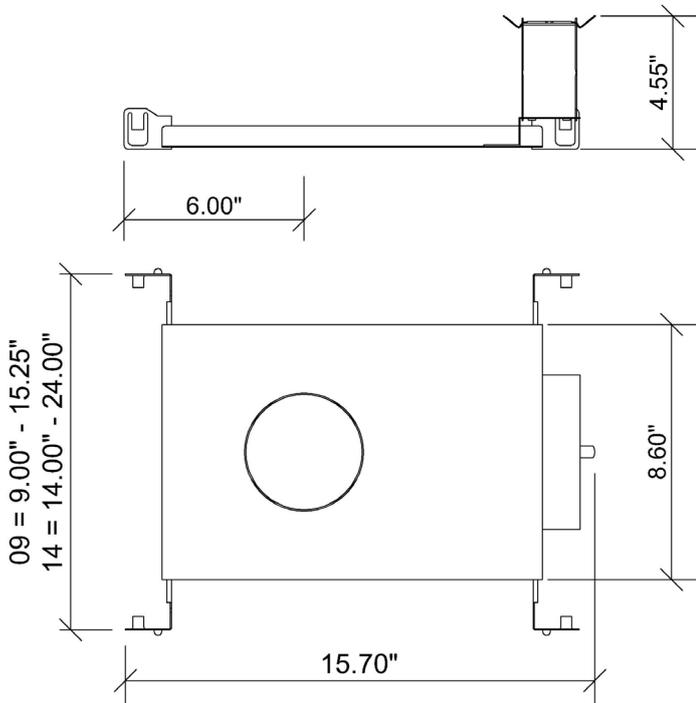

LMT-13-NIC

Tray Order Code:



Housing Type

LMT-13-NIC      Lucent Mounting Tray, Non-Insulated Ceiling

Mounting Hardware

- 09      9" to 15.25"
- 14      14" to 24"
- 36      28" to 36"
- BB      Butterfly Bracket
- CB      Caterpillar Bracket

Lamp


GU      GU10

Supply Voltage

120      120V

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

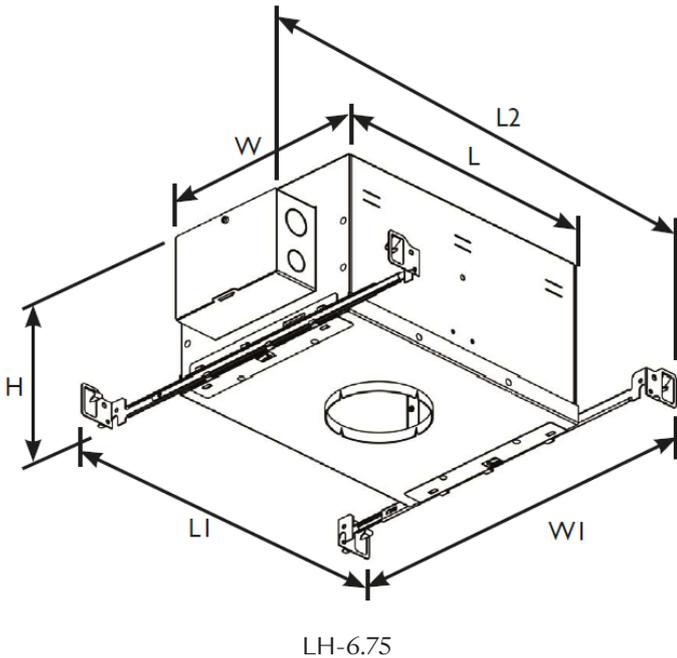

Housing Dimensions					
H	L	L1	L2	W	W1
6.75"	11.75"	14.95"	15.35"	8.75"	14" to 24"

Tray Order Code:

LH-6.75 - NIC - [ ] - GU - 120

Housing Type  
LH-6.75 Lucent Housing 6.75"

Housing Type  
NIC Non-Insulated Ceiling


Mounting Hardware  
09 9" to 15.25"  
14 14" to 24"  
36 28" to 36"  
BB Butterfly Bracket  
CB Caterpillar Bracket

Lamp  
GU GU10

Supply Voltage  
120 120V

Project Ref: \_\_\_\_\_

Location Ref: \_\_\_\_\_

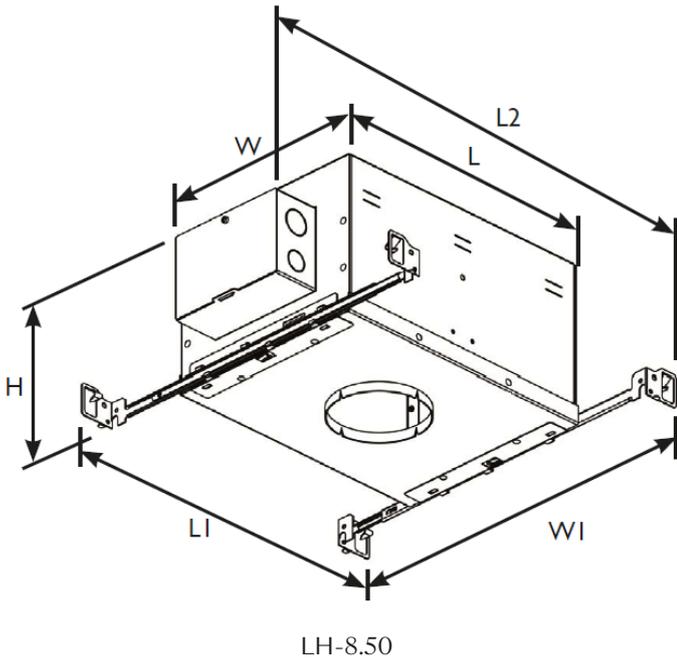

Housing Dimensions					
H	L	L1	L2	W	W1
8.50"	15.75"	18.95"	19.30"	12.00"	14" to 24"

Tray Order Code:

LH-8.50 - [ ] - [ ] - GU - 120

- Housing Type  
LH-8.50      Lucent Housing 8.50"
- Housing Type  
NIC      Non-Insulated Ceiling  
IC      Insulated Ceiling  
AT      Airtight Ceiling, CCEA
- Mounting Hardware  
09      9" to 15.25"  
14      14" to 24"  
36      28" to 36"  
BB      Butterfly Bracket  
CB      Caterpillar Bracket
- Lamp  
GU      GU10
- Supply Voltage  
120      120V