


ProSpex Line 10LED Cube



41 x 279mm (1.61" x 10.98") overall dimension. Fully recessed downlight for interior installation. Family of matching products also available. Required depth height + 10mm

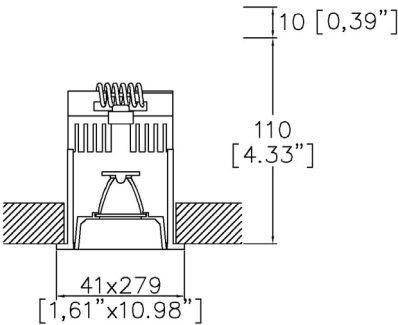

2610-FL-TR
Cut out 272 x 35mm

| | | | |
|-------------------------|---------|---------|---------|
| LED Source | LED | LED | LED |
| CCT | 3000K | 3000K | 3000K |
| Drive Current | 700mA | 700mA | 700mA |
| Power inc Driver | 26W | 26W | 26W |
| Beam Angle | 12° | 34° | 48° |
| Delivered Lumens | 1429 | 1486 | 1416 |
| Delivered Intensisty cd | 11804 | 4011 | 2393 |
| Efficacy lm/w | 55 | 57 | 54 |
| Forward Volt | 30V | 30V | 30V |
| CRI | ≥90 CRI | ≥90 CRI | ≥90 CRI |

Project Ref: _____ Location Ref: _____

Fixture Order Code:

2610-CB-TR

 - - - -

Fixture

2610-CB-TR

Line 10LED Cubed Baffle Trim

CCT

27

30

40

90 CRI 2700K

90 CRI 3000K

90 CRI 4000K

Finish

BK

Black*

Beam

12

34

48

12°

34°

48°

Protocol

S

A

P

D

B

Non-Dim

Analogue (0-10v)

Phase

DALI

Bluetooth**

Please refer to installation instruction for wiring diagram

Technical Details

*Other RAL trim finishes upon application

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

Light efficiency:


55 Lumen/Watt

Light quality:

CRI: 90.7

Color temperature:

3000 K

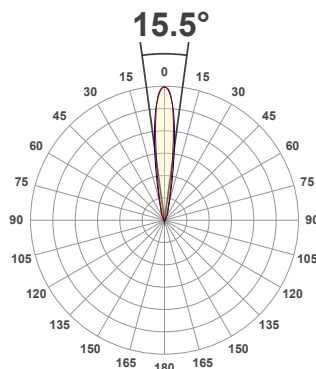

Product name:

Line 10LED Cube, 3000K, 12°, 700mA


Item number:

2610-CB-30-12-700mA


Delivered information for above fixture and LED combination.

Output: 1429 Lumen Peak intensity: 11804 cd Power consumption: 26.0


CRI R values

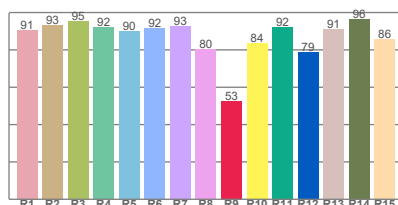

TM30 C Values

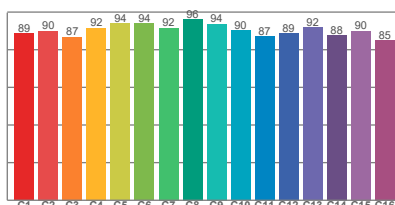


Color vector graphics



| Color temperature | Color rendering index | Red component | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|---------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | x | y | u | v | Δuv |
| 3000 K | 90.7 | 52.5 | 90.3 | 99.2 | 89.8 | 0.437 | 0.404 | 0.252 | 0.350 | 0.0021 |

Beam details

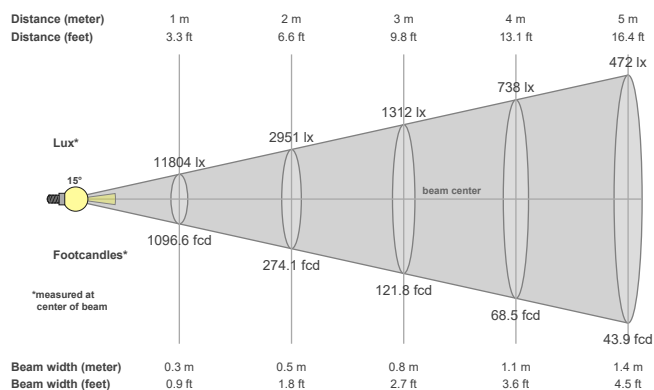

Beam angels

| Beam angle 50% | Field angle 10% | Cutoff angle 2,5% |
|----------------|-----------------|-------------------|
| 15.5° | 33.9° | 56.9° |

Beam intensities

| Peak intensity | Int. ratio in 120° cone | Int. ratio in 90° cone |
|----------------|-------------------------|------------------------|
| 11804 cd | 99.8% | 99.6% |

Beam intensities from 1-20m

| 1m | 2m | 3m | 4m | 5m | 6m | 7m | 8m | 9m | 10m | 11m | 12m | 13m | 14m | 15m | 16m | 17m | 18m | 19m | 20m |
|-----------|----------|----------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 3.3ft | 6.6ft | 9.8ft | 13.1ft | 16.4ft | 19.7ft | 23ft | 26.2ft | 29.5ft | 32.8ft | 36.1ft | 39.4ft | 42.7ft | 45.9ft | 49.2ft | 52.5ft | 55.8ft | 59.1ft | 62.3ft | 65.6ft |
| 11804lx | 2951lx | 1312lx | 738lx | 472lx | 328lx | 241lx | 184lx | 146lx | 118lx | 98lx | 82lx | 70lx | 60lx | 52lx | 46lx | 41lx | 36lx | 33lx | 30lx |
| 1096.6fcd | 274.1fcd | 121.8fcd | 68.5fcd | 43.9fcd | 30.5fcd | 22.4fcd | 17.1fcd | 13.5fcd | 11fcd | 9.1fcd | 7.6fcd | 6.5fcd | 5.6fcd | 4.9fcd | 4.3fcd | 3.8fcd | 3.4fcd | 3fcd | 2.7fcd |

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 0.82

4000K = 1.11

Light efficiency:


57 Lumen/Watt

Light quality:

CRI: 90.7

Color temperature:

3000 K

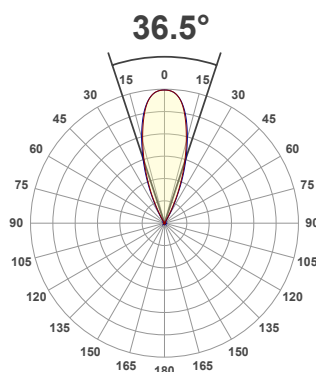

Product name:

Line 10LED Cube, 3000K, 34°, 700mA


Item number:

2610-CB-30-34-700mA


Delivered information for above fixture and LED combination.

Output: 1486 Lumen Peak intensity: 4011 cd Power consumption: 26.0


CRI R values

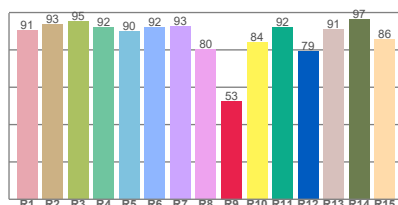

TM30 C Values

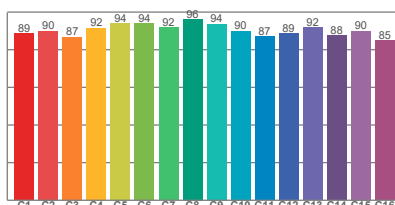


Color vector graphics



| Color temperature | Color rendering index | Red component | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|---------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | x | y | u | v | Δuv |
| 3000 K | 90.7 | 52.6 | 90.3 | 99.2 | 89.8 | 0.437 | 0.404 | 0.251 | 0.350 | 0.0019 |

Beam details

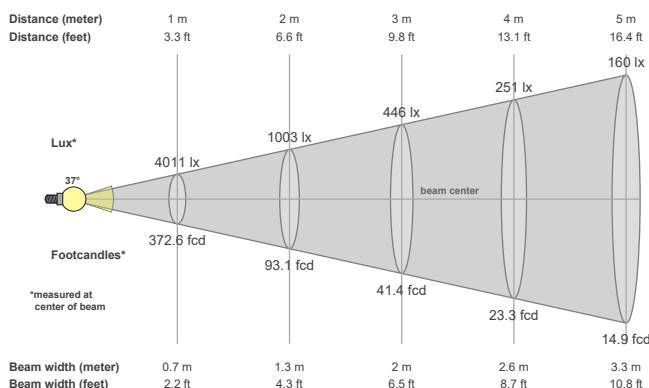

Beam angels

| Beam angle 50% | Field angle 10% | Cutoff angle 2,5% |
|----------------|-----------------|-------------------|
| 36.5° | 56.1° | 63.4° |

Beam intensities

| Peak intensity | Int. ratio in 120° cone | Int. ratio in 90° cone |
|----------------|-------------------------|------------------------|
| 4011 cd | 99.9% | 99.7% |

Beam intensities from 1-20m

| 1m | 2m | 3m | 4m | 5m | 6m | 7m | 8m | 9m | 10m | 11m | 12m | 13m | 14m | 15m | 16m | 17m | 18m | 19m | 20m |
|----------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 3.3ft | 6.6ft | 9.8ft | 13.1ft | 16.4ft | 19.7ft | 23ft | 26.2ft | 29.5ft | 32.8ft | 36.1ft | 39.4ft | 42.7ft | 45.9ft | 49.2ft | 52.5ft | 55.8ft | 59.1ft | 62.3ft | 65.6ft |
| 4011lx | 1003lx | 446lx | 251lx | 160lx | 111lx | 82lx | 63lx | 50lx | 40lx | 33lx | 28lx | 24lx | 20lx | 18lx | 16lx | 14lx | 12lx | 11lx | 10lx |
| 372.6fcd | 93.1fcd | 41.4fcd | 23.3fcd | 14.9fcd | 10.3fcd | 7.6fcd | 5.8fcd | 4.6fcd | 3.7fcd | 3.1fcd | 2.6fcd | 2.2fcd | 1.9fcd | 1.7fcd | 1.5fcd | 1.3fcd | 1.1fcd | 1fcd | 0.9fcd |

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 0.82

4000K = 1.11

Light efficiency:


54 Lumen/Watt

Light quality:

CRI: 94.3

Color temperature:

3000 K

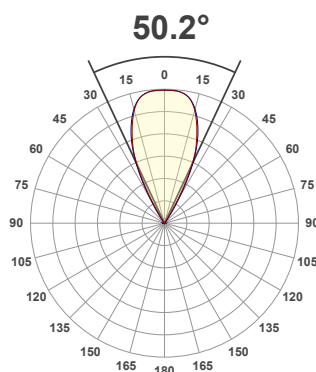

Product name:

Line 10LED Cube, 3000K, 48°, 700mA


Item number:

2610-CB-30-48-700mA


Delivered information for above fixture and LED combination.

Output: 1416 Lumen Peak intensity: 2393 cd Power consumption: 26.0


CRI R values

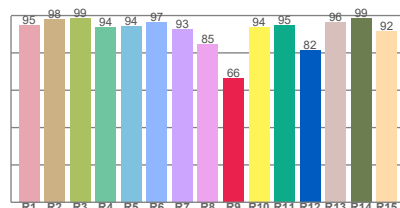

TM30 C Values

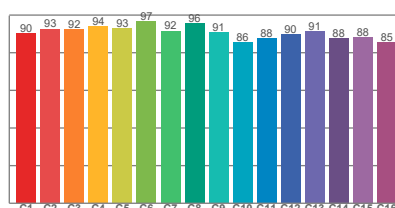


Color vector graphics



| Color temperature | Color rendering index | Red component | Color fidelity | Color gamut | Color quality scale | Color coordinate cie 1931 | Color coordinate cie 1931 | Color coordinate | Color coordinate | Color deviation from black body |
|-------------------|-----------------------|---------------|----------------|-------------|---------------------|---------------------------|---------------------------|------------------|------------------|---------------------------------|
| CCT | CRI | CRI R9 | TM30 Rf | TM30 Rg | CQS | x | y | u | v | Δuv |
| 3000 K | 94.3 | 66.4 | 90.8 | 98.3 | 92.0 | 0.437 | 0.404 | 0.246 | 0.345 | -0.0007 |

Beam details

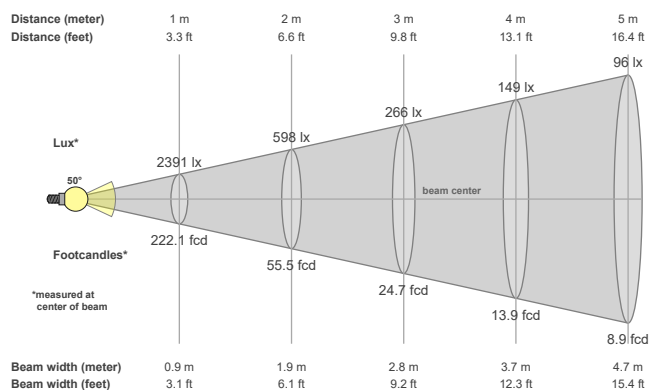

Beam angels

| Beam angle 50% | Field angle 10% | Cutoff angle 2,5% |
|----------------|-----------------|-------------------|
| 50.2° | 64.4° | 71.4° |

Beam intensities

| Peak intensity | Int. ratio in 120° cone | Int. ratio in 90° cone |
|----------------|-------------------------|------------------------|
| 2393 cd | 99.9% | 99.7% |

Beam intensities from 1-20m

| 1m | 2m | 3m | 4m | 5m | 6m | 7m | 8m | 9m | 10m | 11m | 12m | 13m | 14m | 15m | 16m | 17m | 18m | 19m | 20m |
|----------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 3.3ft | 6.6ft | 9.8ft | 13.1ft | 16.4ft | 19.7ft | 23ft | 26.2ft | 29.5ft | 32.8ft | 36.1ft | 39.4ft | 42.7ft | 45.9ft | 49.2ft | 52.5ft | 55.8ft | 59.1ft | 62.3ft | 65.6ft |
| 2391lx | 598lx | 266lx | 149lx | 96lx | 66lx | 49lx | 37lx | 30lx | 24lx | 20lx | 17lx | 14lx | 12lx | 11lx | 9lx | 8lx | 7lx | 7lx | 6lx |
| 222.1fcd | 55.5fcd | 24.7fcd | 13.9fcd | 8.9fcd | 6.2fcd | 4.5fcd | 3.5fcd | 2.7fcd | 2.2fcd | 1.8fcd | 1.5fcd | 1.3fcd | 1.1fcd | 1fcd | 0.9fcd | 0.8fcd | 0.7fcd | 0.6fcd | 0.6fcd |

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 0.82
4000K = 1.11