





MAINS POWER TO BE SWITCHED OFF DURING INSTALLATION.

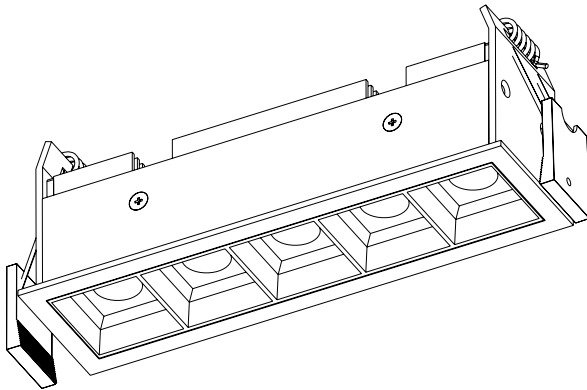

1 Lamp -2601-XX-TR-XX-XX-XX-XX
2 Lamp -2602-XX-TR-XX-XX-XX-XX
5 Lamp -2605-XX-TR-XX-XX-XX-XX
10 Lamp -2610-XX-TR-XX-XX-XX-XX

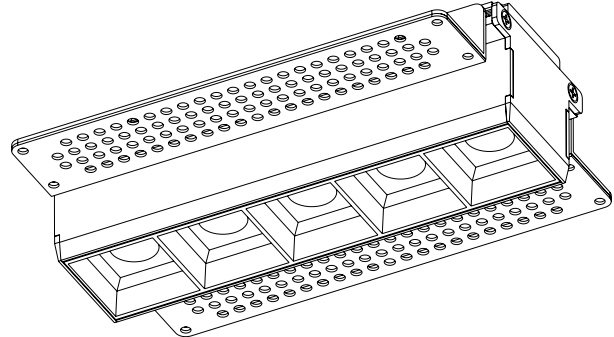


1 Lamp -2601-XX-TL-XX-XX-XX-XX
2 Lamp -2602-XX-TL-XX-XX-XX-XX
5 Lamp -2605-XX-TL-XX-XX-XX-XX
10 Lamp -2610-XX-TL-XX-XX-XX-XX


- Please read the following instructions carefully.
- Follow all national and local wiring and safety regulations.
- Connecting or disconnecting these luminaires while powered will damage the LED.
- These products are designed for interior use only.
- These products should only be installed by a qualified electrician.

The light source contained in these luminaires shall only be replaced by the manufacturer, their service agent or a similarly qualified person.

- These products require an LED driver - **DO NOT CONNECT DIRECTLY TO MAINS POWER!**
- Retain these instructions for future reference.




Switch off mains power before installation.




Do not cover luminaire with insulation material.





Installation Instructions- Line Trim

 **MAINS POWER TO BE SWITCHED OFF DURING INSTALLATION.**

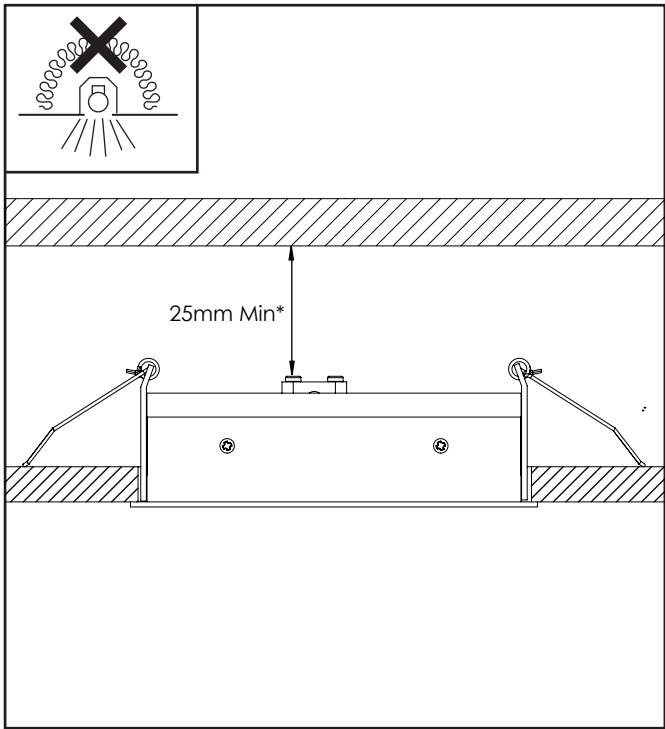


Do not cover fixture with insulation material.
*Additional clearance may be required when fitting a local driver in the ceiling void. See driver list for required depth information.

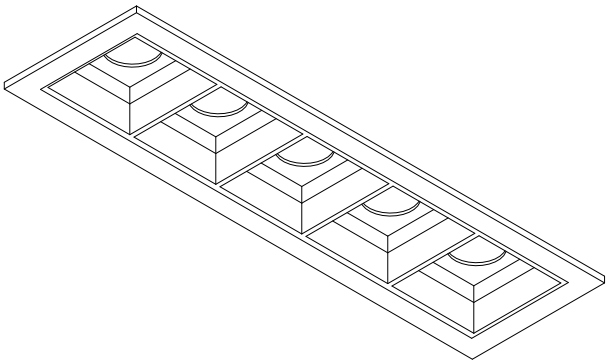


1 Lamp 	35x35mm
2 Lamp 	35x58mm
5 Lamp 	35x139mm
10 Lamp 	35x273mm


1. Cutout size




2. Prepare cutout in surface.




3. Finish surface.




4. Dropdown of power supply connector



5. Make connection with driver




6. Fold springs back and install into cutout.




7. Finished installation





Installation Instructions- Line Trimless

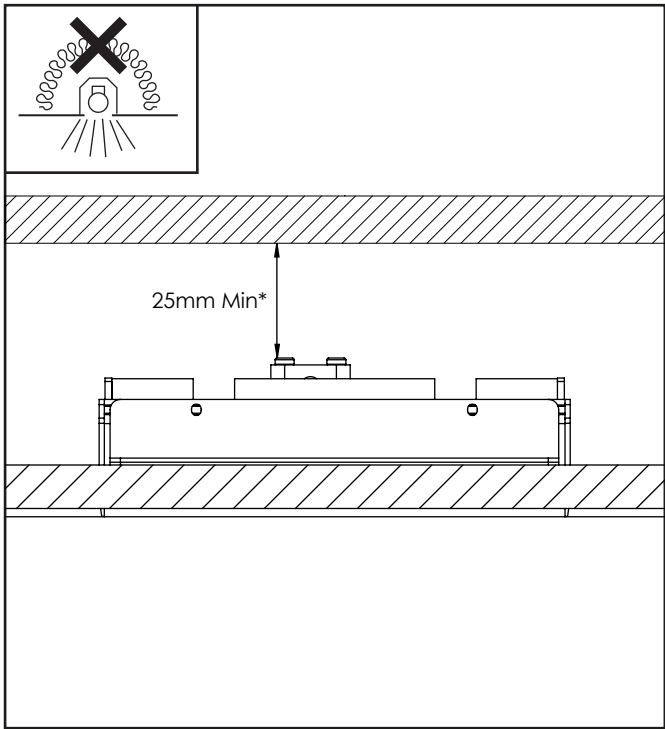! MAINS POWER TO BE SWITCHED OFF DURING INSTALLATION.

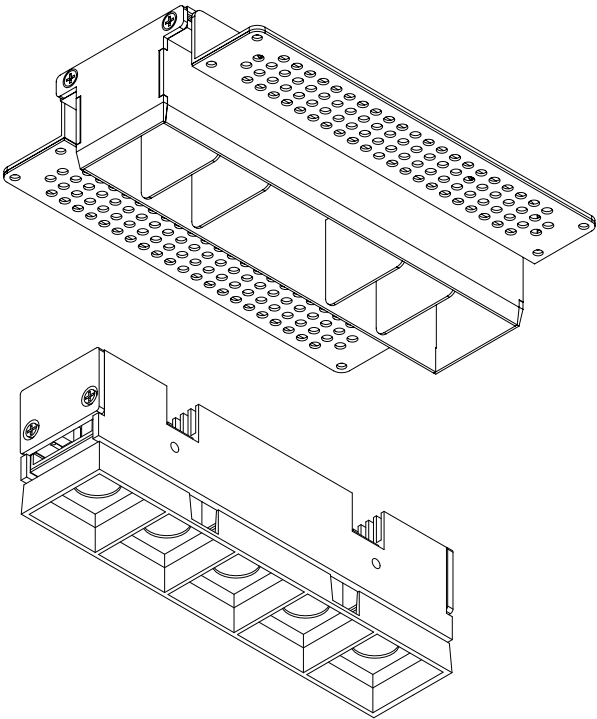


Do not cover fixture with insulation material.
*Additional clearance may be required when fitting a local driver in the ceiling void. See driver list for required depth information.




1 Lamp 	35x35mm
2 Lamp 	35x58mm
5 Lamp 	35x138mm
10 Lamp 	35x273mm


1. Cutout size




2. Prepare cutout in surface.




3. Lift mounting kit through the cutout




4. Secure mounting kit to the ceiling. Be careful not to compress sides of kit.




5. Plaster up to the protruding edge and finish the ceiling.



6. Remove spacers from mounting kit. Driver can now be passed through into ceiling void if being used locally.



6. Connect LED module to power supply and lift into mounting kit, noting the position of the magnets.



7. Finished installation