


ProSpex Plus Mini Conical Accent Trimless

TM65.2 11kgCO2e


TM66 2.3 CEAM



80mm (3.15") overall trimless diameter. Available with standard trim kit or plaster-in kit options. Family of matching products also available. Up to 30° tilt.

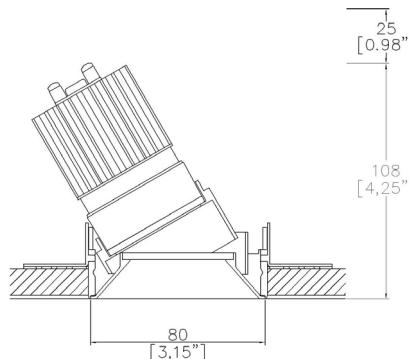

753+LED-TL
Cut-out Ø82mm
Required depth height + 25mm[^]

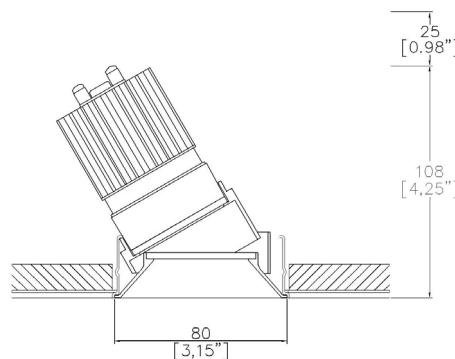

753+LED-PCZ
Cut-out Ø82mm
Required depth height + 25mm[^]

LED Source	LED51/3-WD	LED51/3-WD	LED51/3-WD
CCT	2700K/3000K	2700K/3000K	2700K/3000K
Drive Current	350mA	350mA	350mA
Power inc Driver	13.4W	13.4W	13.4W
Beam Angle	NF (20°)	FL (41°)	WFL (57°)
Delivered Lumens	1102	1089	968
Delivered Intensity cd	6333	2137	1082
Delivered Lumens per circuit watt	82	81	72
Forward Volt	34V	34V	34V
CRI	≥90 CRI	≥90 CRI	≥90 CRI

Project Ref: _____

Location Ref: _____

Fixture Order Code: 753+LED-TL - - - -

Fixture	753+LED-TL	Plus Mini Conical Accent Trimless with LED51
Installation	750+TL 750+PCZ	TL trimless kit PCZ Plaster kit
Finish	WH BK RAL ABR1 ABZ1 PCH1 PNK1 PBR1	White Black Custom RAL Colour* Antique Brass Antique Bronze Polished Chrome Polished Nickel Polished Brass
IP Rating	44 54	IP44 IP54
Emergency	E ED ES	Maintained 3hr Emergency Maintained 3hr DALI Self Test Maintained 3hr Self Test



750+PCZ
Mesh kit for new ceilings



750+TL
Tape & Join kit for
existing, finished ceiling

Module Order Code: LED51/3-WD - -

LED	LED51/3-WD	LED50 ONE Gen3 Ambiance WarmDim
CCT	2718 3018	2700K - 1800K 3000K - 1800K
Beam	NF FL WFL	Narrow Flood Flood Wide Flood

Driver Options:

Protocol	S A P D B	Non-Dim Analogue (0-10v) Phase DALI Bluetooth**
----------	-----------------------	---

Emergency Options:

Emergency	E ED ES	Maintained 3hr Emergency Maintained 3hr DALI Self Test Maintained 3hr Self Test
-----------	---------------	---

Finish selection



Antique Brass



Antique Bronze



Polished Brass




Polished Nickel




Polished Chrome

Accessories




Honeycomb Louvre



Diffusing Lens



Frosted Lens

Accessories Order Code:

Louvre/Lens

LL45	Honeycomb Louvre
LLDF	Diffusing Lens
LLFR	Frosted Lens
LLLS	Linear Spread Lens
LLHS	Heavy Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

**Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details. Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE