


Voltage Drop Chart

| A Power Supply (W) | B Distance From Power Supply to Feed-In (2 x 1.5mm) | | | |
|--------------------|---|-----|-------------|-------------|
| | 5m | 10m | 20m | 30m |
| | C Total track Length | | | |
| | (m) | (m) | (m) | (m) |
| 60 | 50 | 50 | 50 | 50 |
| 100 | 50 | 50 | 40 | 25 |
| 150 | 50 | 40 | 20 | Not Allowed |
| 200 | 40 | 30 | Not Allowed | Not Allowed |
| 250 | 35 | 20 | Not Allowed | Not Allowed |



Wiring Schematic

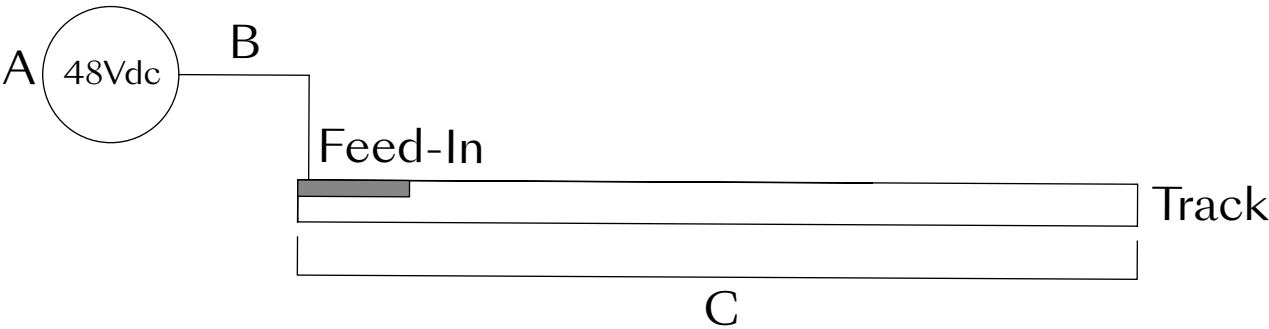

Use non-dimmable PSU, and connect control cables directly to the D+ and D- terminals of the tracks live feed.

Dimmable drivers integral to the fittings track adaptors.