


FineLine System  
TubeLED Midi



75mm (2.95") overall diameter. Miniature low voltage LED tubular spotlight. TubeLED Spotlight for use in FineLine Profile system. Family of matching products also available.

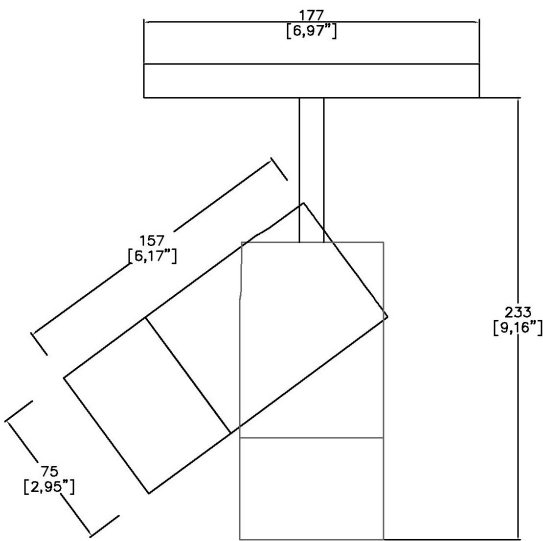


9100/2-LED-FLS

LED Source	LED	LED	LED
CCT	3000K	3000K	3000K
Drive Current	525mA	525mA	525mA
Power inc Driver	22W	22W	22W
Beam Angle	12°	19°	34°
Delivered Lumens	1340	1185	1226
Delivered Intensisty cd	20036	9215	3923
Efficacy lm/w	61	54	56
Forward Volt	33V	33V	33V
CRI	≥90 CRI	≥90 CRI	≥90 CRI


Project Ref: \_\_\_\_\_ Location Ref: \_\_\_\_\_

Fixture Order Code:		9100/2-LED	-		-		-		-		-		-	FLS
Fixture	9100/2-LED	TubeLED Midi												
CCT	927	90 CRI 2700K												
	930	90 CRI 3000K												
	940	90 CRI 4000K												
Beam	12	12°												
	19	19°												
	34	34°												
Protocol	S	Non-Dim												
	A	Analogue (0-10v)												
	D	DALI												
	B	Bluetooth**												
Colour Insert	SN	Satin Nickel												
	SG	Satin Gold												
	CP	Copper												
	BZ	Bronze												
	(Blank)	Not required standard black to be supplied												
Finish	WH	White												
	BK	Black												
	RAL	Custom RAL Finish												
Fixing	FLS	FineLine System												

Please refer to installation instruction for wiring diagram




Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens



Warm Tone

Accessories Order Code:

- Louvre/Lens
- MG45 Honeycomb Louvre
  - MGCC Warm Tone Lens
  - MGUV UV Lens
  - MGDF Diffusing Lens
  - MGFR Frosted Lens
  - MGLS Linear Spread Lens
  - MGHS Heavy Spread Lens

Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable bluetooth devices, which may need to be mounted remotely from the spotlight.

First Fix Requirement. Please refer to installation instructions for for first fix requirements for the monopoint types.

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

## Light efficiency:


**61 Lumen/Watt**

## Light quality:

**CRI: 90.4**

## Color temperature:

**3000 K**

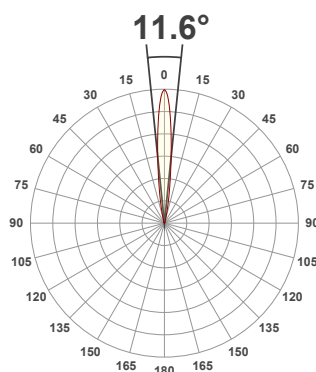

## Product name:

**9100\_2-LED-930-12**


## Item number:

**TubeLED Midi 3000K 12deg**


**Delivered information for above fixture and LED combination.**

**Output: 1340 Lumen    Peak intensity: 20036 cd    Power consumption: 22.0**


**CRI R values**

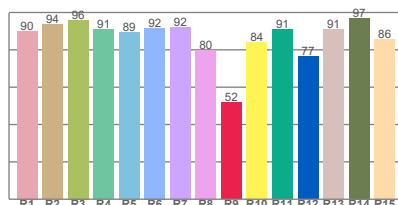

**TM30 C Values**

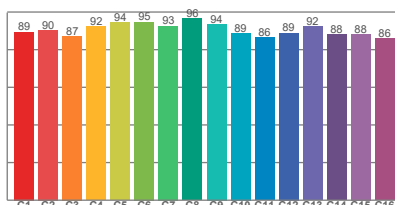


**Color vector graphics**



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	90.4	51.8	90.6	99.2	89.1	0.437	0.404	0.251	0.349	0.0010

## Beam details

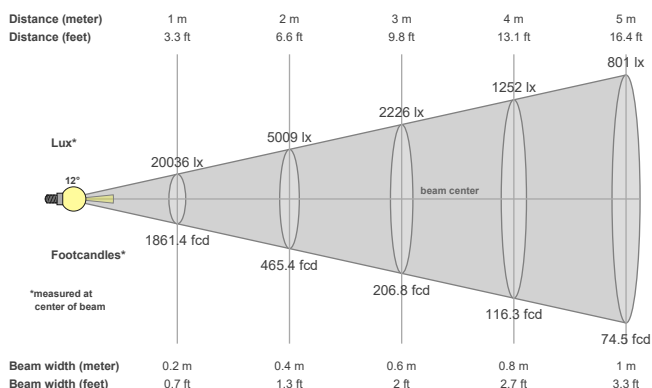

## Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
11.6°	24.1°	35.7°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
20036 cd	99.4%	98.6%

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
20036lx	5009lx	2226lx	1252lx	801lx	557lx	409lx	313lx	247lx	200lx	166lx	139lx	119lx	102lx	89lx	78lx	69lx	62lx	56lx	50lx
1861.4fcd	465.4fcd	206.8fcd	116.3fcd	74.5fcd	51.7fcd	38fcd	29.1fcd	23fcd	18.6fcd	15.4fcd	12.9fcd	11fcd	9.5fcd	8.3fcd	7.3fcd	6.4fcd	5.7fcd	5.2fcd	4.7fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1  
4000K = 1.084

## Light efficiency:


**54 Lumen/Watt**

## Light quality:

**CRI: 90.4**

## Color temperature:

**3000 K**

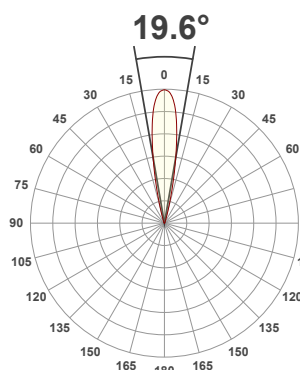

## Product name:

**9100\_2-LED-930-19**


## Item number:

**TubeLED Midi 3000K 19deg**


**Delivered information for above fixture and LED combination.**

**Output: 1185 Lumen    Peak intensity: 9215 cd    Power consumption: 22.0**


**CRI R values**

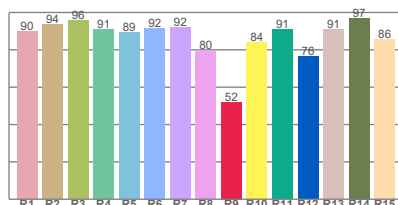

**TM30 C Values**

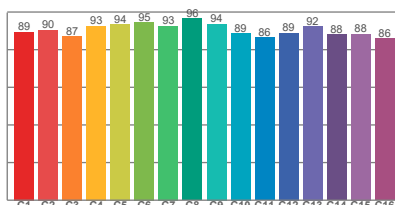


**Color vector graphics**



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	90.4	52.0	90.6	99.3	89.2	0.437	0.404	0.250	0.348	0.0010

## Beam details

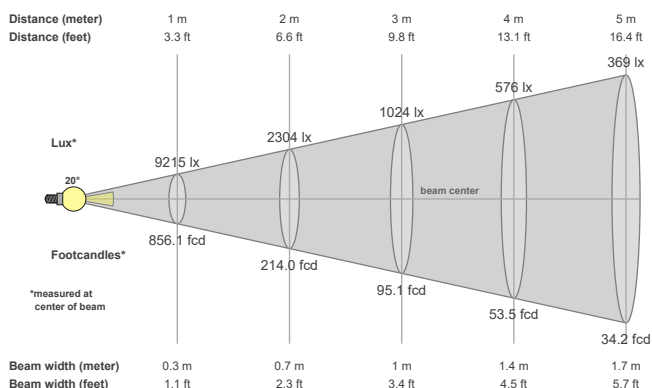

## Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
19.6°	31.9°	43°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
9215 cd	99.6%	98.7%

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
9215lx	2304lx	1024lx	576lx	369lx	256lx	188lx	144lx	114lx	92lx	76lx	64lx	55lx	47lx	41lx	36lx	32lx	28lx	26lx	23lx
856.1 fcd	214 fcd	95.1 fcd	53.5 fcd	34.2 fcd	23.8 fcd	17.5 fcd	13.4 fcd	10.6 fcd	8.6 fcd	7.1 fcd	5.9 fcd	5.1 fcd	4.4 fcd	3.8 fcd	3.3 fcd	3 fcd	2.6 fcd	2.4 fcd	2.1 fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1  
4000K = 1.084

## Light efficiency:


**56 Lumen/Watt**

## Light quality:

**CRI: 90.4**

## Color temperature:

**3000 K**

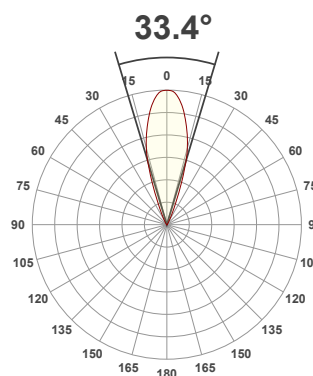

## Product name:

**9100\_2-LED-930-34**


## Item number:

**TubeLED Midi 3000K 34deg**


**Delivered information for above fixture and LED combination.**

**Output: 1226 Lumen    Peak intensity: 3923 cd    Power consumption: 22.0**


CRI R values

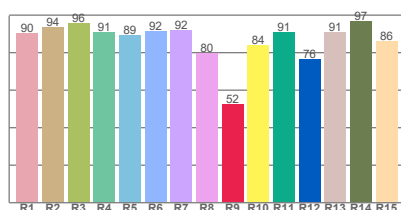

TM30 C Values

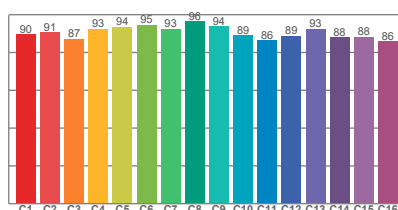


Color vector graphics



Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	90.4	52.3	90.6	99.4	89.2	0.437	0.404	0.250	0.348	0.0010

## Beam details

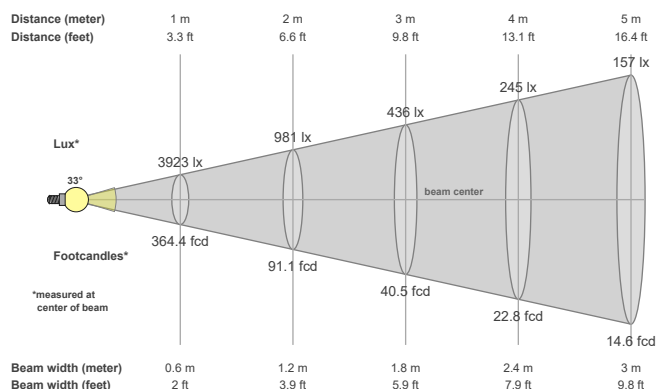

## Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
33.4°	49.8°	66.7°

## Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
3923 cd	99.5%	98.5%

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
3923lx	981lx	436lx	245lx	157lx	109lx	80lx	61lx	48lx	39lx	32lx	27lx	23lx	20lx	17lx	15lx	14lx	12lx	11lx	10lx
364.4fcd	91.1fcd	40.5fcd	22.8fcd	14.6fcd	10.1fcd	7.4fcd	5.7fcd	4.5fcd	3.6fcd	3fcd	2.5fcd	2.2fcd	1.9fcd	1.6fcd	1.4fcd	1.3fcd	1.1fcd	1fcd	0.9fcd

The above information is for 3000K colour temperature, for specific module information please see LED spec located on our website

For information regarding other colour temperatures please use the following factors for lumen output and candelas:

2700K = 1  
4000K = 1.084