

### ProSpex Square Edge90 Accent



### 90 x 90mm (3.54 x 3.54") overall dimension. 360° rotation. Up to 30° tilt. Edge baffle to ensure aperture is glare free and for a professional look. Available with standard trim kit or plaster-in kit for flush appearance. Family of matching products also available. Required depth height + 25mm^



81433-A-LED + 8000-PBZ-SQ Cut-out 83mm Ø



81433-A-LED + 8000-PCZ-SQ Cut-out 83mm Ø

LED Source	LED51TW	LED51TW
CCT range 5000K-2000K	@ 3000K	@ 3000K
Drive Current (max per channel)	700mA	700mA
Power inc Driver Max	15.1W	15.1W
Beam Angle	25°	35°
Delivered Lumens	452	539
Delivered Intensisty cd	1674	1068
Efficacy Im/w	30	36
Forward Volt (max per channel)	18.4V	18.4V
CRI	≥95 CRI	≥95 CRI

# lucent<sub>®</sub>

Project Ref:_	Location Ref:
Fixture Ord Fixture - <sup>81433-A-LED</sup>	der Code: 81433-A-LED – – – – – – – – – – – – – – – – – – –
Finish - WH BK RAL	White Black Custom RAL Colour*
IP Rating - 54	IP54
Emergency - E ED ES	Maintained 3hr Emergency Maintained 3hr DALI Self Test Maintained 3hr Self Test
Installation Installation 8000-PBZ-SQ 8000-PCZ-SQ	Order Code:
LED Order	- Code: LED51TW - 5020
LED - LED51TW	LED50 ONE Tuneable White
CCT 5020	5000K - 2000K
Beam	25° 35°
Protocol D6 D8 B	DALI Type 6** DALI Type 8** Bluetooth***



### **Technical Details**

Heavy Spread Lens

LLHS

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*DALI Type 6 requires two DALI addresses, one for CCT control the other for Intesisty control. DALI Type 8 is a single DALI Type 8 address for CCT and Intesisty control. Please check which control system is being used before specifying.

\*\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet supersededs all previous versions.


All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE


Copyright © 2015 Lucent Lighting Ltd.


www.lucent-lighting.com

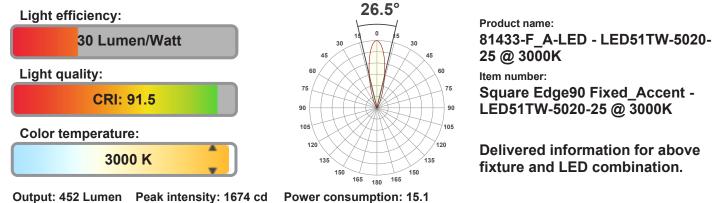


Output: 452 Lumen Peak intensity: 1674 cd

CRI R values








Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
ССТ	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	х	У	u	v	Δuv
3000 K	91.5	79.1	93.5	106.8	93.6	0.437	0.404	0.256	0.336	-0.0130

### Beam details

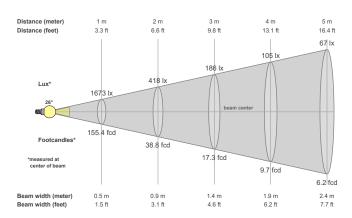

Beam angels		
Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
26.5°	51.7°	69.4°
Beem interesting		

Beam intensities		
Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
1674 cd	99.4%	98.2%

### Beam intensities from 1-20m

1m 2m 3m 4m 5m 6m 7m 8m 9m 10m 12m 14m 14m 15m 16m 17m 18m 19m 20m   3.3ft 6.6ft 9.8ft 13.1ft 16.4ft 19.7ft 23ft 26.2ft 29.5ft 32.8ft 36.1ft 39.4ft 42.7ft 45.9ft 49.2ft 52.6ft 55.4ft 62.5ft 59.1ft 62.3ft 62.5ft				-	-															
1673lx 418lx 186lx 105lx 67lx 46lx 34lx 26lx 21lx 17lx 14lx 12lx 10lx 9lx 7lx 6lx 5lx 4lx 4lx   155.4fc 38.8fcd 17.3fcd 9.7fcd 6.2fcd 4.3fcd 2.2fcd 1.9fcd 1.3fcd 1.1fcd 0.9fcd 0.8fcd 0.5fcd 0.5fcd 0.4fcd 0.4fcd 0.4fcd	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
155.4fc 38.8fc 17.3fcd 9.7fcd 6.2fcd 4.3fcd 2.4fcd 1.9fcd 1.6fcd 1.1fcd 0.9fcd 0.8fcd 0.6fcd 0.5fcd 0.4fcd 0.4fc	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
	1673lx	418lx	186lx	105lx	67lx	46lx	34lx	26lx	21lx	17lx	14lx	12lx	10lx	9lx	7lx	7lx	6lx	5lx	5lx	4lx
		38.8fcd	17.3fcd	9.7fcd	6.2fcd	4.3fcd	3.2fcd	2.4fcd	1.9fcd	1.6fcd	1.3fcd	1.1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd	0.4fcd


All the above information for fixtures with LED51TW-5020 modules are tested at 3000K

Factors to adjust lumen output for the following CCTs at 100% output for the colour are as follows:


2000K = 0.672700K = 0.84 3500K = 1.085


4000K = 1.113 5000K = 1.087


www.lucent-lighting.com

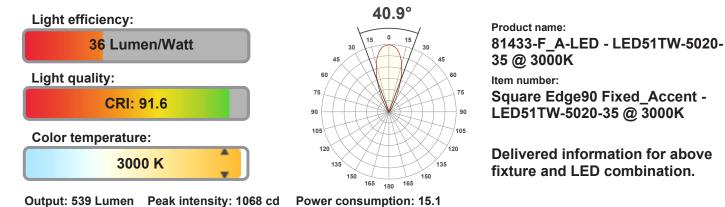










Cutoff angle 2,5%

87.6°

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
ССТ	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	х	у	u	v	Δuv
3000 K	91.6	79.5	93.6	106.4	93.8	0.437	0.404	0.256	0.336	-0.0126

### Beam details

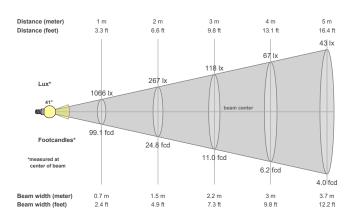

Beam angels	
Beam angle 50%	Field angle 10%

40.9°

Beam intensities		
Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
1068 cd	99.5%	97.9%

66.5°

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1066lx	267lx	118lx	67lx	43lx	30lx	22lx	17lx	13lx	11lx	9lx	7lx	6lx	5lx	5lx	4lx	4lx	3lx	3lx	3lx
99.1fcd	24.8fcd	11fcd	6.2fcd	4fcd	2.8fcd	2fcd	1.5fcd	1.2fcd	1fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.4fcd	0.4fcd	0.3fcd	0.3fcd	0.3fcd	0.2fcd

All the above information for fixtures with LED51TW-5020 modules are tested at 3000K

Factors to adjust lumen output for the following CCTs at 100% output for the colour are as follows:

2000K = 0.67

2700K = 0.84

3500K = 1.085

4000K = 1.113 5000K = 1.087