




Oculus50 Accent Trim

|        |          |
|--------|----------|
| TM65.2 | 4kgCO2e  |
| TM66   | 2.5 CEAM |



Ø68mm (2.68”) adjustable downlight with eyeball mechanism, offering 30° adjustment in all directions. Available with a standard trim kit or 3 flush trim options, depending on ceiling type and finish.

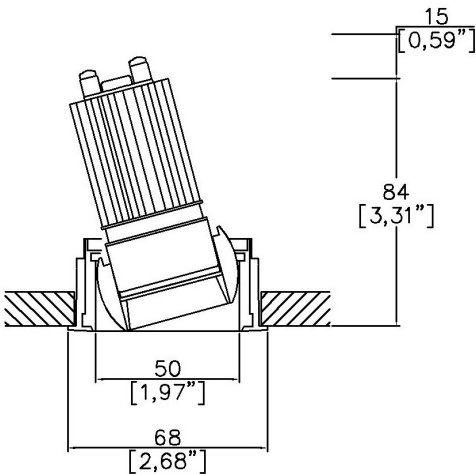

Oculus50 with Trim Kit TR1  
Cut-out Ø61mm (Ø2,40”).  
Required depth height +15mm.

|                                   |            |            |            |            |
|-----------------------------------|------------|------------|------------|------------|
| LED Source                        | LED35/Q-HO | LED35/Q-HO | LED35/Q-HO | LED35/Q-HO |
| CCT                               | 3000K      | 3000K      | 3000K      | 3000K      |
| Drive Current                     | 250mA      | 250mA      | 250mA      | 250mA      |
| Power inc Driver                  | 9.7W       | 9.7W       | 9.7W       | 9.7W       |
| Beam Angle                        | NF (17°)   | MF (22°)   | FL (33°)   | WFL (48°)  |
| Delivered Lumens                  | 915        | 966        | 980        | 843        |
| Delivered Intensisty cd           | 9886       | 5734       | 3034       | 1239       |
| Delivered Lumens per circuit watt | 94         | 99         | 101        | 87         |
| Forward Volt                      | 33V        | 33V        | 33V        | 33V        |
| CRI                               | ≥90 CRI    | ≥90 CRI    | ≥90 CRI    | ≥90 CRI    |

L1  
≥75 Dwellings  
Compliant

L2  
≥95 General  
Compliant

L2  
≥80 Display  
Compliant

Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 4000K x 1.02.

Project Ref: \_\_\_\_\_ Location Ref: \_\_\_\_\_

Fixture Order Code: 

OC50010

 -  -  -  -  -  -

|                    |         |   |
|--------------------|---------|---|
| Fixture            | OC50010 | Oculus50 Accent for LED                               |
| Installation       |         |   |
| TR1 <sup>(1)</sup> |         | Trim for Existing Ceilings (ceiling thickness 5-25mm) |
| Oculus Finish      |         |   |
| WH02               |         | Textured Matt White RAL 9010                          |
| BK02               |         | Textured Matt Black RAL 9005                          |
| RAL*               |         | Custom RAL Colour*                                    |
| ABR1               |         | Antique Brass   |
| ABZ1               |         | Antique Bronze  |
| PCH1               |         | Polished Chrome                                       |
| PNK1               |         | Polished Nickel                                       |
| PBR1               |         | Polished Brass  |
| Internal Finish    |         |   |
| WH02               |         | Textured Matt White RAL 9010                          |
| BK02               |         | Textured Matt Black RAL 9005                          |
| RAL*               |         | Custom RAL Colour*                                    |
| ABR1               |         | Antique Brass   |
| ABZ1               |         | Antique Bronze  |
| Trim Finish        |         |   |
| WH02               |         | Textured Matt White RAL 9010                          |
| BK02               |         | Textured Matt Black RAL 9005                          |
| RAL*               |         | Custom RAL Colour*                                    |
| ABR1               |         | Antique Brass   |
| ABZ1               |         | Antique Bronze  |
| PCH1               |         | Polished Chrome                                       |
| PNK1               |         | Polished Nickel                                       |
| PBR1               |         | Polished Brass  |
| IP Rating          |         |   |
| 54                 |         | IP54  |
| 65                 |         | IP65  |
| Fire Rating        |         |   |
| 0                  |         | No Fire Rating  |
| FR <sup>(2)</sup>  |         | Fire Rated  |

(1) For any ceiling thickness or construction type not shown please contact Lucent  
(2) Tested and approved to EN 1363-1:2020 and EN 1365-2:2014 for 60 minutes Fire Rating.

Module Order Code: 

LED35/Q-HO

 -  -

|            |  |                           |
|------------|--|---------------------------|
| LED        |  |                           |
| LED35/Q-HO |  | LED35 QUANTUM High Output |
| CCT        |  |                           |
| 27         |  | 2700K                     |
| 30         |  | 3000K                     |
| 40         |  | 4000K <sup>(3)</sup>      |
| Beam       |  |                           |
| NF         |  | Narrow Flood              |
| MF         |  | Medium Flood              |
| FL         |  | Flood                     |
| WFL        |  | Wide Flood                |

(3) contact Lucent for availability

Driver Options:

|          |                  |
|----------|------------------|
| Protocol |                  |
| S        | Non-Dim          |
| A        | Analogue (0-10v) |
| P        | Phase            |
| D        | DALI             |
| B        | Bluetooth**      |

Emergency Options:

|           |                               |
|-----------|-------------------------------|
| Emergency |                               |
| E         | Maintained 3hr Emergency      |
| ED        | Maintained 3hr DALI Self Test |
| ES        | Maintained 3hr Self Test      |

Finish selection




Antique Brass



Antique Bronze



Polished Brass



Polished Nickel



Polished Chrome

Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Accessories Order Code:

- Louvre/Lens
- LS45

LSDF

LSFR

LSLS

LSHS
- Honeycomb Louvre

Diffusing Lens

Frosted Lens

Linear Spread Lens

Heavy Spread Lens

Technical Details

\*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

\*\*Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

^ Depth indicated is the minimum recess depth for the luminaire with a remote mounted LED driver. Installing a driver through either the luminaire cut-out or installation kit may require additional recess depth, please refer to the relevant luminaire installation instructions for further details.Data correct at time of publishing

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire instllation instructions for details)

IP Rating. Tested from underside of the ceiling

Note that the picture of the finishes provided is for illustrative purposes only. The finishes may vary in colour, texture and appearance. Contact Lucent lighting Ltd for more information.

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.