




EasyFit Trim Round Fixed



3.78” (96mm) overall diameter. Range of soft appearance with minimal trim for achieving trimless effect. Adjustable and wallwash version available. Supplied with a remote driver box and a plug and play tethered power supply.

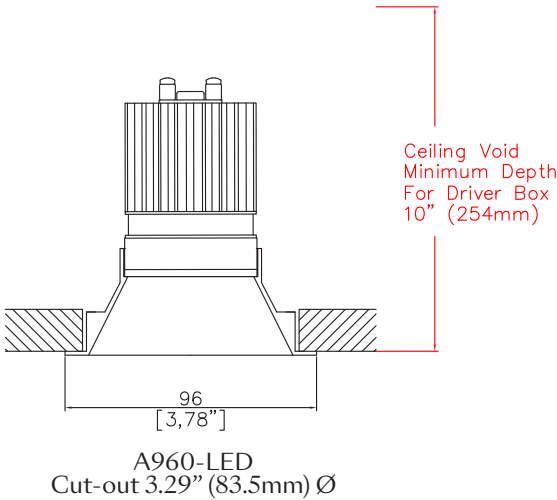

LED Source	ALED51/Q-HE	ALED51/Q-HE	ALED51/Q-HE	ALED51/Q-HE
CCT	3000K	3000K	3000K	3000K
Drive Current	200mA	200mA	200mA	200mA
Power inc Driver	8.0W	8.0W	8.0W	8.0W
Beam Angle	NF (16°)	MF (24°)	FL (33°)	WFL (54°)
Delivered Lumens	1082	1106	1104	1082
Delivered Intensisty cd	7979	5365	3264	1427
Delivered Lumens per circuit watt	135	138	138	135
Forward Volt	33V	33V	33V	33V
CRI	≥90 CRI	≥90 CRI	≥90 CRI	≥90 CRI

Apply these factors to 3000K for lumen output of other CCTs: 2700K x 0.98 / 3500K x 1.01 / 4000K x 1.02.

Ceiling void minimum depth for driver box: 10.00” (254mm)

Project Ref: _____ Location Ref: _____

Specify fixture part number (All boxes must be filled in to correctly order)

A960-LED			ALED51/Q-HE			ALEZ1-120-277		
----------	--	--	-------------	--	--	---------------	--	--

Finish _____

WH White
BK Black
RAL Custom*
ABRI Antique Brass
ABZI Antique Bronze
PCHI Polished Chrome
PNKI Polished Nickel
PBRI Polished Brass

Location _____

DP Damp
WT Wet

Supplied for dry location as standard

LED Type _____

ALED51/Q-HE LED50 ONE Quantum Efficiency

CCT _____

27 2700K
30 3000K
35 3500K (1)
40 4000K (1)

(1) contact Lucent for availability

Beam Angles _____

NF Narrow Flood
MF Medium Flood
FL Flood
WFL Wide Flood

EasyFit _____

ALEZ1-120-277 Lucent EasyFit 120-277V

Dimming Protocol _____

SLA EldoLED Analog (0-10V) (0.1% Dimming)
ECA EldoLED Analog (0-10V) (1% Dimming)
SLD EldoLED DALI (0.1% Dimming)
ECD EldoLED DALI (1% Dimming)
PTB15 ERP PTB 0-10V/Phase (1% Dimming) (PHASE ONLY 120V)
FTX15 Hatch Foundation 0-10V/Phase (1% Dimming)

Contact Lucent factory for Lutron LED Driver options


Louvre/Lens _____

XX Not required
LL45 Honeycomb
LLDF Solite/Diffusing
LLFR Frosted Lens
LLLS Linear Spread
LLHS Heavy Spread


Trim accepts a maximum of 1 accessory

NIC - No contact with insulation

Ceiling void minimum depth for driver box: 10.00” (254mm)



Fixture and EasyFit driver box

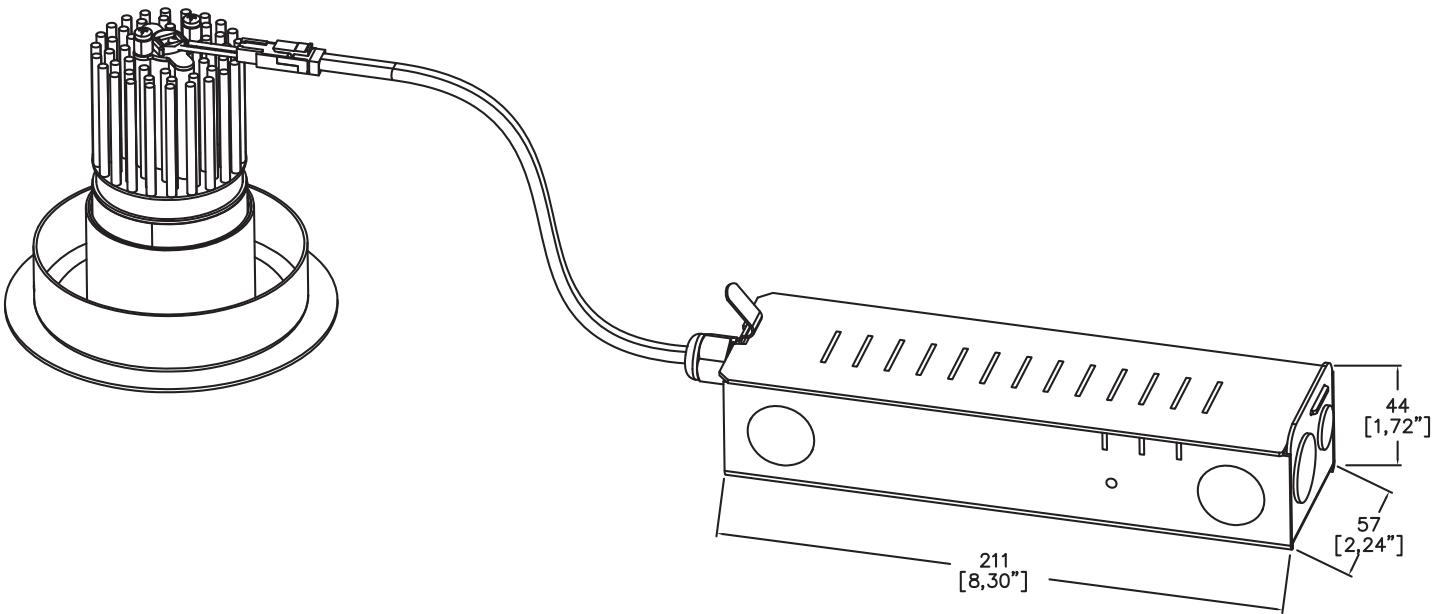

Ceiling void minimum depth for driver box: 10.00" (254mm)

Finish selection



Antique Brass



Antique Bronze



Polished Brass



Polished Nickel



Polished Chrome

Accessories



Honeycomb Louvre



Diffusing Lens



Frosted Lens



Heavy Spread Lens



Linear Spread Lens

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

^ Depth indicated is the minimum recess depth for the driver to be installed through the luminaire cut out.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

Location. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

This specification sheet supersedes all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE

